

CITY STANDARD NOTES


NOTE: THIS DRAWING IS APPROVED SUBJECT TO

- APPROVAL OF THESE PLANS DOES NOT RELEASE THE OWNER OF THE RESPONSIBILITY FOR THE CORRECTION OF MISTAKES, ERRORS, OR OMISSIONS CONTAINED THEREIN. IF DURING THE COURSE OF CONSTRUCTION OF THE IMPROVEMENTS, PUBLIC INTEREST REQUIRES A MODIFICATION OF OR A DEPARTURE FROM THE CITY SPECIFICATIONS OR THESE IMPROVEMENT PLANS, THE CITY ENGINEER SHALL HAVE THE AUTHORITY TO REQUIRE SUCH MODIFICATION OR DEPARTURE AND TO SPECIFY THE MANNER IN WHICH THE SAME IS TO BE MADE.
- ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE 1992 STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION AND THE 1992 STANDARD DETAILS AND SUBSEQUENT ADDENDA FOR PUBLIC WORKS CONSTRUCTION AS ADOPTED BY THE CITY COUNCIL. A DIGITAL COPY OF THE SPECIFICATIONS AND DETAILS IS AVAILABLE AT: [HTTP://WWW.SANJOSECA.GOV/INDEX.ASP?NID=2247](http://www.sanjoseca.gov/index.asp?nid=2247)
- CONTRACTOR SHALL NOTIFY THE PROJECT INSPECTOR AT LEAST 48 HOURS PRIOR TO STARTING WORK.
- ALL CONTRACTORS WILL BE RESPONSIBLE FOR THE VERIFICATION OF LOCATIONS OF ALL EXISTING UTILITIES IN THE FIELD. ALL CONTRACTORS SHALL CALL U.S.A. (CA 1-800-227-2600) 48 HOURS BEFORE DIGGING, AND OBTAIN AN IDENTIFICATION NUMBER (SECTION 4210.1 OF THE GOVERNMENT CODE).
- COMPACT SUBGRADE FOR SIDEWALK AND SIMILAR STRUCTURES TO 90% MINIMUM RELATIVE DENSITY IN LIEU OF THE 95% REQUIRED IN SECTION 21-1.05 OF THE STANDARD SPECIFICATIONS. COMPACT SUBGRADE FOR CURB, GUTTER AND DRIVEWAYS TO 95%. RELATIVE COMPACTION AND MOISTURE CONTENT OF ALL NATIVE MATERIALS SHALL BE DETERMINED IN ACCORDANCE WITH CAL TESTS 216 AND 231.
- ALL ASPHALT CONCRETE MIX SHALL CONFORM TO SECTION 39 OF 2010 CALTRANS STANDARD SPECIFICATIONS AND THESE SPECIAL PROVISIONS. THE ASPHALT CONCRETE SHALL BE ¾" HOT MIX ASPHALT (TYPE A) FOR ARTERIAL AND COLLECTOR STREETS AND ½" HOT MIX ASPHALT (TYPE A) FOR RESIDENTIAL STREETS AND CONFORMS, UNLESS OTHERWISE AUTHORIZED BY THE CITY ENGINEER. THE HMA SHALL BE "STANDARD" CONSTRUCTION PROCESS, UNLESS OTHERWISE DETERMINED BY THE CITY ENGINEER. THE CONTRACTOR SHALL TAKE ONE (1) 4-INCH OR 6-INCH DIAMETER DENSITY CORE FOR EVERY 250 TONS OF HMA FROM RANDOM LOCATIONS THE CITY ENGINEER DESIGNATES. CONTRACTOR SHALL TAKE DENSITY CORES IN THE CITY'S PRESENCE AND BACKFILL AND COMPACT HOLES WITH AUTHORIZED MATERIAL. THE CITY WILL TEST THE CORE FROM EACH 250 TONS OF HMA. THE CITY WILL DETERMINE THE PERCENT OF THEORETICAL MAXIMUM DENSITY FOR EACH DENSITY CORE BY DETERMINING THE FIELD CORE DENSITY AND DIVIDING BY THE LABORATORY THEORETICAL MAXIMUM DENSITY. DENSITY CORES MUST BE TAKEN FROM THE FINAL LAYER, CORED THROUGH THE ENTIRE PAVEMENT THICKNESS SHOWN. FIELD CORE DENSITY SHALL BE BETWEEN 91-97 PERCENT OF MAXIMUM THEORETICAL DENSITY. ANY FIELD CORE DENSITY ABOVE 97 AND BELOW 91 PERCENT SHALL BE REMOVED AND REPLACED BY THE CONTRACTOR AT NO COST TO THE CITY. THE REDUCE PAYMENT FACTORS TABLE SHOWN IN SECTION 39-2.03 DOES NOT APPLY.
- ASPHALT COATING:
  - APPLY TACK COAT (AKA PAINT BINDER) TO SURFACES DESIGNATED IN, AND IN ACCORDANCE WITH, SECTION 39-4.02 OF THE 1988 CALTRANS STANDARD SPECIFICATIONS. THE ASPHALTIC EMULSION USED SHALL BE SS-1H.
  - PRIME COAT ALL AGGREGATE BASE SURFACES PRIOR TO PLACING A.C. PAVING UNLESS THE TOTAL THICKNESS OF A.C. PAVING IS 0.5 FOOT OR GREATER. PRIME COAT ALL AGGREGATE BASE SURFACES THAT WILL BE SUBJECTED TO TRAFFIC PRIOR TO PAVING.
  - CONSTRUCT PRIME COAT IN ACCORDANCE WITH SECTION 39-4.02 OF THE 1992 CALTRANS STANDARD SPECIFICATION, WITH THE EXCEPTION THAT SS-1H ASPHALTIC EMULSION SHALL BE USED IN LIEU OF LIQUID ASPHALT. PRIME COAT NOT REQUIRED FOR FULL DEPTH AC ALTERNATE.
- ALL IRRIGATION LINES OR OTHER PRIVATELY OWNED UNDERGROUND LINES THAT REQUIRE RELOCATION AS DETERMINED BY THE CITY ENGINEER SHALL BE AT THE SOLE EXPENSE OF THE DEVELOPER.
- TEMPORARY STREET SIGNS TO BE INSTALLED AT ALL INTERSECTIONS BEFORE UNITS ARE OCCUPIED.
- AS A WATER CONSERVATION MEASURE, USE OF FIRE HYDRANT WATER OR ANY OTHER SOURCE OF POTABLE WATER FOR CONSTRUCTION PURPOSES IS PROHIBITED. RECYCLED WATER IS AVAILABLE AT MULTIPLE LOCATIONS ACROSS THE CITY. CERTIFICATION IS REQUIRED BY SOUTH BAY WATER RECYCLING PRIOR TO RECEIVING A RECYCLED WATER METER. FOR MORE INFORMATION, PLEASE CALL LYLE FROHMAN AT (408) 794-6805.
- HAZARDOUS MATERIALS:


UPON DISCOVERY OF HAZARDOUS MATERIAL THE CONTRACTOR SHALL PROMPTLY NOTIFY THE CITY IN WRITING OF ANY:

  - MATERIAL THAT THE CONTRACTOR BELIEVES MAY BE MATERIAL THAT IS HAZARDOUS WASTE, AS DEFINED IN SECTION 25117 OF THE HEALTH AND SAFETY CODE, WHICH IS REQUIRED TO BE REMOVED TO A CLASS I, CLASS II, OR CLASS III DISPOSAL SITE IN ACCORDANCE WITH PROVISIONS OF EXISTING LAW.
  - SUBSURFACE OR LATENT PHYSICAL CONDITIONS AT THE SITE DIFFERING FROM THOSE INDICATED.
  - UNKNOWN PHYSICAL CONDITIONS AT THE SITE OF ANY UNUSUAL NATURE, DIFFERENT MATERIALLY FROM THOSE ORDINARILY ENCOUNTERED AND GENERALLY RECOGNIZED AS INHERENT IN WORK OF THE CHARACTER PROVIDED FOR IN THE CONTRACT. THE DEVELOPER'S AGENT SHALL PROMPTLY INVESTIGATE THE SUSPECTED CONDITION AND, AS NECESSARY, INITIATE FURTHER ANALYSIS OF THE PROBLEM. IF REMEDIATION IS REQUIRED, A REMEDIATION PLAN WILL BE SUBMITTED TO THE DIRECTOR OF PUBLIC WORKS FOR REVIEW BY ENVIRONMENTAL MANAGEMENT AND, UPON APPROVAL BY THE DIRECTOR, BE IMPLEMENTED AT DEVELOPER'S SOLE EXPENSE.
- IN THE EVENT THAT HUMAN REMAINS AND/OR CULTURAL MATERIALS ARE FOUND, ALL PROJECT-RELATED CONSTRUCTION SHOULD CEASE WITHIN A 100-FOOT RADIUS. THE CONTRACTOR SHALL, PURSUANT TO SECTION 7050.5 OF THE HEALTH AND SAFETY CODE, AND SECTION 5097.94 OF THE PUBLIC RESOURCES CODE OF THE STATE OF CALIFORNIA, NOTIFY THE SANTA CLARA COUNTY CORONER IMMEDIATELY.
- CONTRACTOR SHALL PROVIDE VIDEO INSPECTION OF ALL STORM AND SANITARY SEWER MAINS. VIDEO INSPECTION OF ALL MAINS SHALL BE PERFORMED AFTER ALL TESTING HAS BEEN COMPLETED.
- CONTRACTOR SHALL REMOVE ALL U.S.A MARKINGS AS SOON AS THEY ARE NO LONGER NEEDED. ONLY CHALK PAINT SHALL BE USED IN THE REDEVELOPMENT AREA (BOUNDED BY JULIAN STREET AND HIGHWAY 280, AND BETWEEN HIGHWAY 87 AND FOURTH STREET). REMOVAL OF PAINT SHALL BE BY HIGH WATER PRESSURE METHOD ONLY.
- INSTALLATION OR REMOVAL OF STREET TREES REQUIRES A PERMIT FROM THE DEPARTMENT OF TRANSPORTATION. THE CITY ARBORIST WILL SPECIFY SPECIES. CONTACT THE CITY ARBORIST BY EMAIL AT [DEVELOPMENTPROJECT@SANJOSECA.GOV](mailto:DEVELOPMENTPROJECT@SANJOSECA.GOV) WITH YOUR PROJECT INFORMATION TO OBTAIN A TREE PERMIT.
- IF CONTRACTOR DAMAGES EXISTING ASPHALT SECTION DURING THE REMOVAL OF EXISTING CURB AND GUTTER OR AT THE DISCRETION OF THE PROJECT INSPECTOR, THE ASPHALT CONCRETE SHALL BE REPAIRED BY SAWCUTTING 12" MINIMUM FROM THE LIP OF GUTTER AND INSTALLING A 12" MINIMUM 'DEEP-LIFT' AC SECTION.
- CITY SURVEY MONUMENTS SHALL BE PRESERVED. IN THE EVENT THAT A CITY MONUMENT IS LOST TO CONSTRUCTION ACTIVITIES, THE CONTRACTOR SHALL, AT THE CONTRACTOR'S SOLE EXPENSE, BE RESPONSIBLE FOR ITS RE-ESTABLISHMENT AND THE FILING OF A CORNER RECORD WITH THE COUNTY'S SURVEYOR'S OFFICE. A RECORD OF SURVEY SHALL BE FILED FOR ALL NEW CITY MONUMENTS SET IN CONJUNCTION WITH THIS IMPROVEMENT PLAN, UNLESS A FINAL OR PARCEL MAP REQUIRING SAID MONUMENTS IS RECORDED AS PART OF THIS PROJECT.
- PAVEMENT MARKING AND STRIPING LAYOUT AND TRAFFIC SIGNAL LOOP LAYOUT SERVICES SHALL BE PROVIDED BY THE DEVELOPER'S ENGINEER, SURVEYOR, OR OTHER QUALIFIED PERSONNEL.
- PLAN REFERENCES (I.E. PLANNING PERMIT NUMBER, RECORD DRAWINGS, ETC.)

PUBLIC ENCROACHMENT PERMIT FOR  
THE DOWNTOWN WEST UTILIDOR ON  
SAN CARLOS ST, S. MONTGOMERY ST, PARK AVE, W. SAN  
FERNANDO ST, VTA LIGHT RAIL, CRANDALL ST, CAHILL ST, W.  
JULIAN ST, RAILROAD CROSSING, AND CINNABAR ST  
SAN JOSE, CALIFORNIA

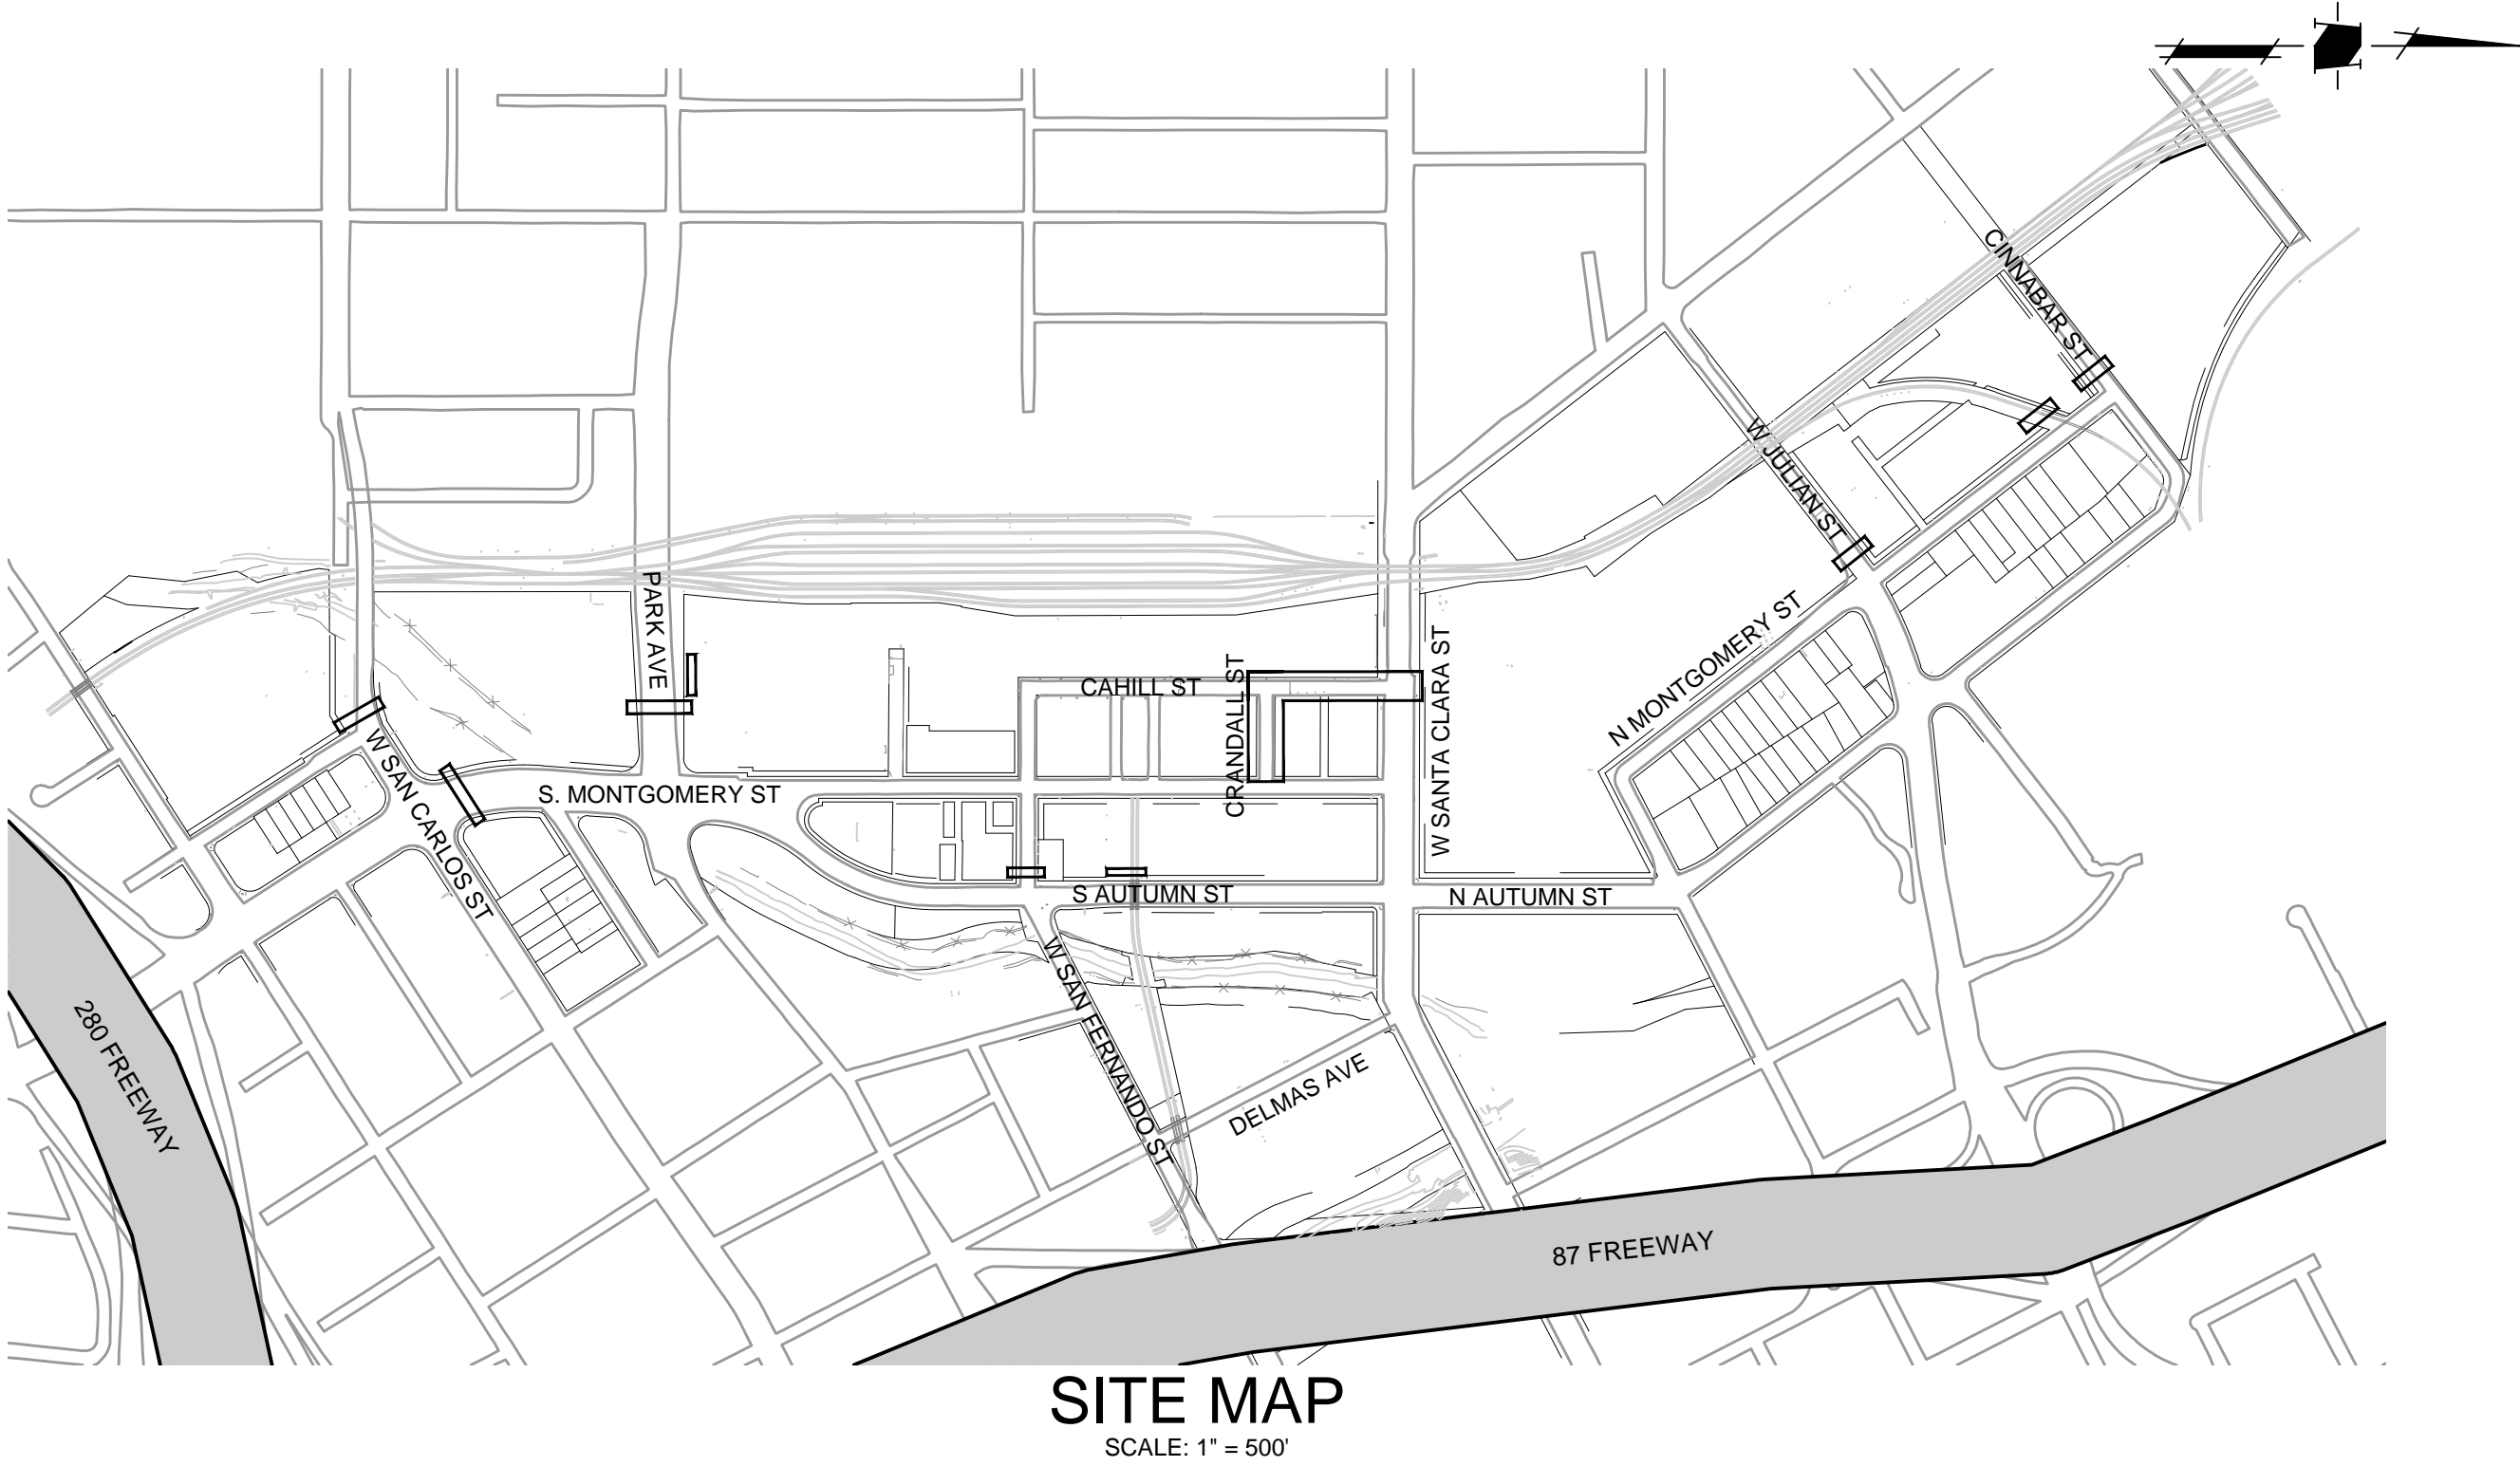

SITE MAP  
SCALE: 1" = 500'

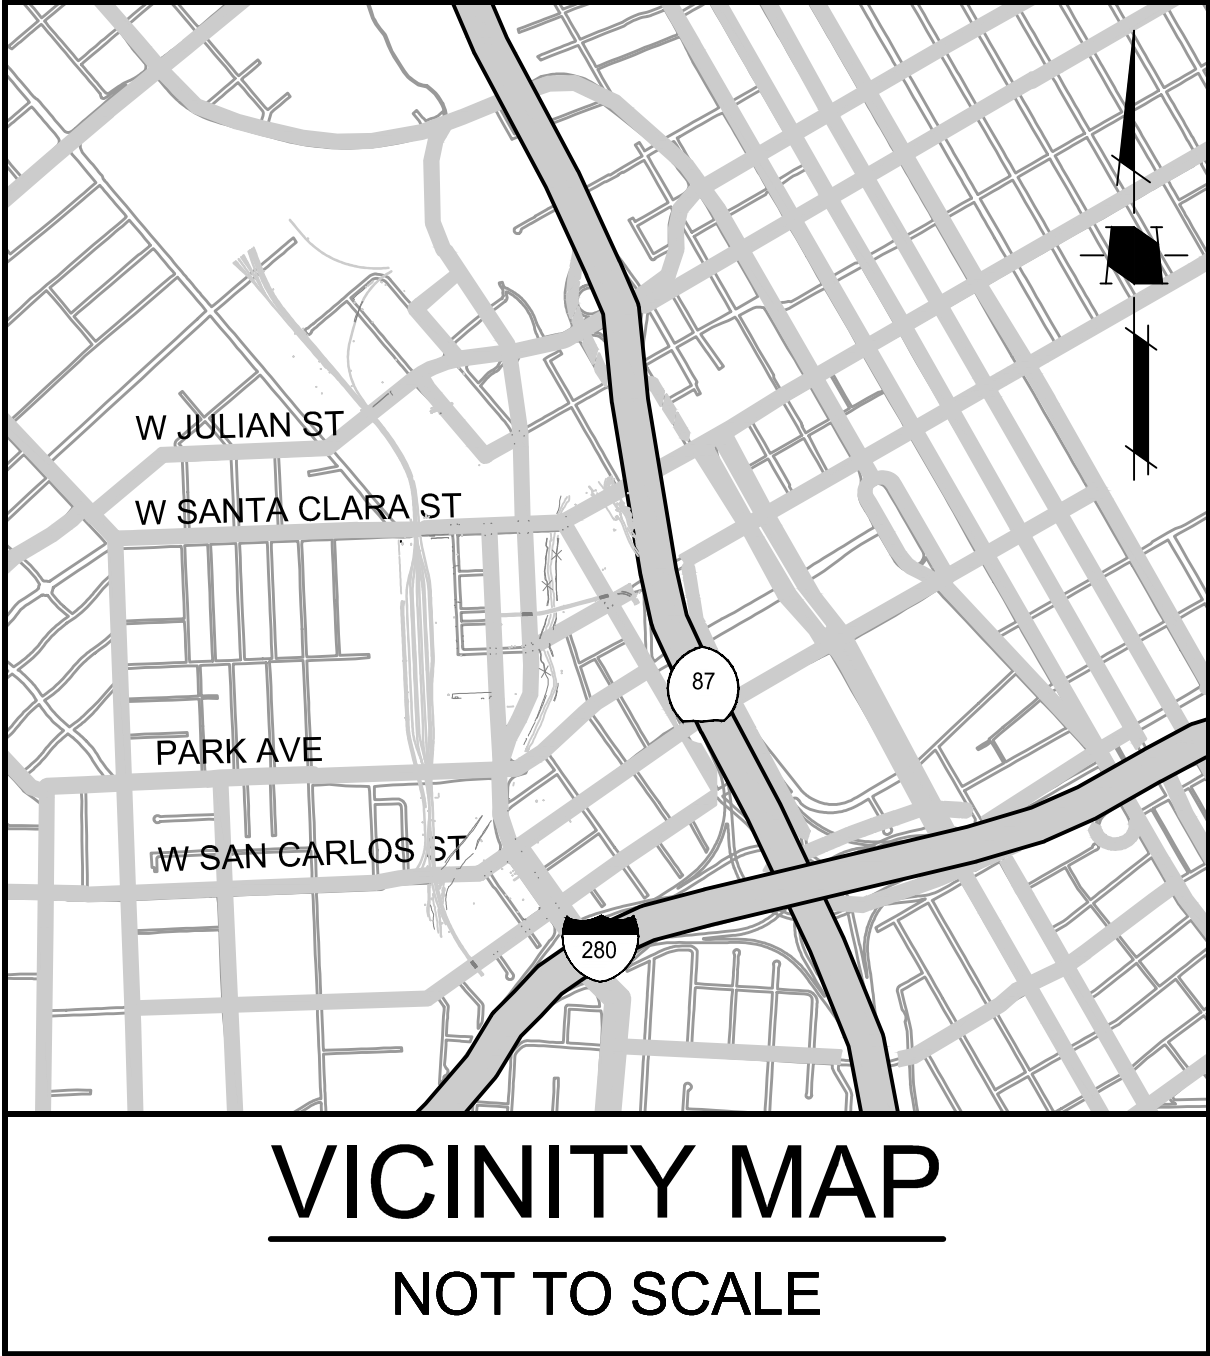

VICINITY MAP  
NOT TO SCALE

ENGINEER'S STATEMENT

THESE IMPROVEMENT PLANS HAVE BEEN PREPARED BY ME OR  
UNDER MY DIRECTION IN ACCORDANCE WITH STANDARD  
ENGINEERING PRACTICE.



NAME: VITINA MANDELLA  
TITLE: LAND DEVELOPMENT MANAGER  
COMPANY: HMM  
P.E. No: 73073

DATE

PUBLIC ENCROACHMENT  
PERMIT FOR THE  
DOWNTOWN WEST UTILIDOR

SAN JOSE

CALIFORNIA



1570 Oakland Road  
San Jose, CA 95131

(408) 487-2200  
HMHca.com

DRAWN BY: LARM/JBC  
DESIGNED BY: RH  
CHECKED BY: RH  
JOB NO.: 5719.00  
SCALE: AS SHOWN  
DATE: SEPTEMBER 8, 2020

DEPARTMENT OF PUBLIC WORKS

PERMIT # PROJECT #	PROJECT INSPECTOR: VOICEMAIL:
PROJECT ENGINEER	
NAME _____ DATE _____	
DEPARTMENT OF TRANSPORTATION	
NAME _____ DATE _____	
MUNICIPAL WATER	
NAME _____ DATE _____	
STREETLIGHT LAYOUT	
NAME _____ DATE _____	
ELECTRICAL CIRCUITS	
NAME _____ DATE _____	
ADDITIONAL APPROVAL	
NAME _____ DATE _____	
CITY OF <b>SAN JOSE</b> CAPITAL OF SILICON VALLEY	
APPROVED BY MATTHEW CANO DIRECTOR OF PUBLIC WORKS	
SHEET 1 OF 15	

PROJECT BASIS OF BEARING

THE CALCULATED BEARING OF SOUTH 02° 43' 35" WEST TAKEN BETWEEN THE RECORD POSITION OF GPS CONTROL POINT 2218 AND GPS CONTROL POINT 1049, AS SHOWN ON THAT CERTAIN RECORD OF SURVEY FILED FOR RECORD ON JUNE 21, 1996, IN BOOK 677 OF MAPS AT PAGE 54, OFFICIAL RECORDS OF SANTA CLARA COUNTY WAS TAKEN AS THE BASIS FOR ALL BEARINGS SHOWN HEREON.

PROJECT BENCHMARK

ELEV DATUM: SCVWD BM365+83.71', NAVD88, DATE ADJUSTED MARCH 14, 2017, VALLEY TRANSPORTATION AGENCY'S ALUMINUM DISK (VTA-225); ON TOP AND AT MID CONCRETE SIDEWALK, 3.1 FEET SOUTH FROM FACE OF CURB, 12 FEET WEST FROM THE SOUTHEAST CORNER OF NEW JULIAN STREET BRIDGE OVER GUADALUPE RIVER BETWEEN HIGHWAY 87 AND AUTUMN STREET, CITY OF SAN JOSE.



UNAUTHORIZED CHANGES & USES: THE ENGINEER PREPARING THESE PLANS  
WILL NOT BE RESPONSIBLE FOR, OR LIABLE FOR, UNAUTHORIZED CHANGES TO  
OR USES OF THESE PLANS. ALL CHANGES TO THE PLANS MUST BE IN WRITING  
AND MUST BE APPROVED BY THE PREPARER OF THESE PLANS.

PRELIMINARY  
NOT FOR CONSTRUCTION

1ST SUBMITTAL

CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING BUT NOT LIMITED TO, THE SAFETY OF THE WORK, THE PROTECTION OF THE PUBLIC, THE PROTECTION OF THE ENVIRONMENT, THE PROTECTION OF THE CITY'S ASSETS, AND THE PROTECTION OF THE CITY'S REPUTATION. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

S:\PROJECTS\571900\ENCROACHMENT PERMIT\FIG1 DRAWINGS\571900\FIG1 COVER NOTES DE TALL.DWG, 8/16/2020 2:24 PM

CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY. THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OR WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

S:\PROJECTS\571900L\DWG\COACH\CHMNT PERMIT\PLT DRAWS\571900IP01 COVER NOTES DETAILS.DWG, 9/16/2020 2:53 PM

## GENERAL NOTES

THE FOLLOWING NOTES ARE NOT PART OF THE CITY OF SAN JOSE STANDARD NOTES AND ARE PROVIDED AS SUPPLEMENTAL NOTES BY HHM.

1. REVISIONS TO THESE PLANS MUST BE REVIEWED AND APPROVED IN WRITING BY HHM AND THE CITY OF SAN JOSE PRIOR TO CONSTRUCTION OF AFFECTED ITEMS.
2. THE CONTRACTOR SHALL NOTIFY HHM, AT (408) 487-2200 BEFORE PROCEEDING WITH ANY WORK THAT APPEARS TO BE INSUFFICIENTLY DETAILED.
3. CONTRACTOR SHALL REPLACE OR REPAIR, AT CONTRACTOR'S EXPENSE, ALL DAMAGED, REMOVED OR OTHERWISE DISTURBED EXISTING UTILITIES, OR IMPROVEMENTS IN KIND.
4. CONTRACTOR SHALL COORDINATE WORK WITH SUBCONTRACTORS, ONGOING GRADING OR SITE WORK OF OTHER CONTRACTORS, AND WITH THE INSTALLATION OF FACILITIES BY PG&E, AT&T AND CABLE TV.
5. IF TEMPORARY LANE CLOSURES ARE REQUIRED FOR CONSTRUCTION OPERATIONS, THE CONTRACTOR SHALL PREPARE A TRAFFIC CONTROL PLAN AND OBTAIN APPROVAL FROM THE CITY OF SAN JOSE BEFORE COMMENCING WORK. THE CONTRACTOR SHALL ALSO PROVIDE FLAG MEN, CONES OR BARRICADES, AS NECESSARY TO CONTROL TRAFFIC AND PREVENT HAZARDOUS CONDITIONS, PER CALTRANS STANDARDS.
6. EXISTING PEDESTRIAN WALKWAYS, BIKE PATHS AND DISABLED ACCESS PATHWAYS SHALL BE MAINTAINED DURING CONSTRUCTION TO THE SATISFACTION OF THE CITY INSPECTOR.
7. CONTRACTOR SHALL BACKFILL TRENCHES, OR PLACE STEEL PLATING AND/OR HOT-MIX ASPHALT, AS REQUIRED BY THE CITY INSPECTOR, TO PROTECT OPEN TRENCHES AT THE END OF EVERY WORK DAY.
8. CONTRACTOR SHALL CLEAN STREETS TO REMOVE ACCUMULATION OF MUD AND DEBRIS RESULTING FROM CONSTRUCTION ACTIVITIES.
9. THE CONTRACTOR IS RESPONSIBLE FOR CONFORMING TO EXISTING PAVEMENT, ADJACENT LANDSCAPE AND OTHER IMPROVEMENTS WITH A SMOOTH TRANSITION IN PAVING, CURBS, GUTTERS, SIDEWALK, ETC. TO AVOID ABRUPT OR APPARENT CHANGES IN GRADES OR CROSS SLOPES, LOW SPOTS OR HAZARDOUS CONDITIONS.
10. CONTRACTOR TO OBTAIN REQUIRED PERMITS FOR HAUL ROUTES PRIOR TO DEMOLITION AND CONSTRUCTION.
11. CONTRACTOR IS RESPONSIBLE FOR SCHEDULING ALL INSPECTIONS AS REQUIRED.
12. CONTRACTOR IS TO PROVIDE STREET CROSS SLOPES BETWEEN 2% AND 4% UNLESS SPECIFICALLY NOTED OTHERWISE ON PLANS, AND TO ALLOW CITY INSPECTOR AND ENGINEER TO INSPECT FORMS PRIOR TO POURING OF CURB AND GUTTER.
13. CONTRACTOR IS TO POT HOLE ALL UTILITY CONNECTIONS PRIOR TO CONSTRUCTION TO VERIFY INFORMATION PROVIDED ON PLAN REGARDING EXISTING UTILITIES.
14. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THE LOCATIONS OF ALL EXISTING UNDERGROUND UTILITIES. CALL USA (UNDERGROUND SERVICE ALERT) TWO WORKING DAYS BEFORE DIGGING AT (811). LOCATIONS SHOWN ON THE PLANS WERE TAKEN FROM AVAILABLE RECORDS AND ARE APPROXIMATE AND SHOWN FOR GENERAL INFORMATION ONLY, AND MAY BE INCOMPLETE. RELOCATION OR REPAIR OF ANY DAMAGE TO UTILITIES OR PIPELINES AND PLUGGING OR REMOVAL OF ABANDONED LINES SHALL BE THE CONTRACTOR'S RESPONSIBILITY.
15. THE LOCATION OF THE MONUMENTS SHOWN ON THIS PLAN ARE FOR GENERAL INFORMATION ONLY. REFER TO THE FINAL MAP FOR THE LOCATION OF EXISTING AND PROPOSED MONUMENTS.
16. IT IS THE CONTRACTOR'S RESPONSIBILITY TO MAINTAIN AND PRESERVE THE EXISTING MONUMENTS OF RECORD. SHOULD THE CONTRACTOR DESTROY OR DISTURB ANY MONUMENTS OF RECORD, THE CONTRACTOR SHALL, AT CONTRACTOR'S SOLE EXPENSE, RETAIN A CALIFORNIA LICENSED LAND SURVEYOR TO REPLACE SAID MONUMENTS AND FILE AN APPROPRIATE CORNER RECORD.
17. CONTRACTOR SHALL KEEP UP-TO-DATE A COMPLETE RECORD SET OF CONTRACT DRAWINGS SHOWING EVERY CHANGE FROM THE ORIGINAL DRAWINGS MADE DURING THE COURSE OF CONSTRUCTION INCLUDING EXACT LOCATION, SIZES, MATERIALS AND EQUIPMENT. A COMPLETE SET OF CORRECTED AND COMPLETED RECORD DRAWING PRINTS SHALL BE SUBMITTED TO THE ENGINEER PRIOR TO FINAL ACCEPTANCE FOR REVIEW AND APPROVAL BY THE ENGINEER.
18. EXTENT OF PAVEMENT SAW CUTTING MAY REQUIRE FIELD ADJUSTMENT DUE TO THE UNEVEN NATURE OF EXISTING PAVEMENTS AND INTERMITTENT NATURE OF DATA COLLECTED FOR DESIGN PURPOSES. CONTACT ENGINEER IF FIELD CONDITIONS DIFFER FROM THOSE ANTICIPATED ON PLAN.

## EXISTING CONDITIONS

1. EXISTING GRADES AND CONFORM DESIGNS SHOWN ARE BASED OFF OF INTERMITTENT FIELD TOPO DATA AND MAY NOT INCLUDE ALL CONFORM SITUATIONS. CONTRACTOR SHALL REVIEW ALL CONFORM CONDITIONS AND NOTIFY ENGINEER OF ANY AREAS THAT MAY REQUIRE FIELD FIT ADJUSTMENTS. ALL PAVING AND HARDSCAPE CONFORMS MUST COMPLY WITH ADA REQUIREMENTS AND MAINTAIN POSITIVE DRAINAGE TO DRAIN INLETS.
2. GRADES ENCOUNTERED ON-SITE MAY VARY FROM THOSE SHOWN. CONTRACTOR SHALL REVIEW THE PLANS AND CONDUCT INVESTIGATIONS AS REQUIRED TO VERIFY EXISTING CONDITIONS AT THE PROJECT SITE.
3. INFORMATION REGARDING EXISTING UTILITIES IS FROM RECORD DATA AND MAY NOT REPRESENT ACTUAL CONDITIONS. CONTRACTOR SHALL CONDUCT FIELD EVALUATION OF ALL EXISTING SUBSURFACE IMPROVEMENTS AND UTILITIES, WHETHER SHOWN ON THESE PLANS OR NOT, PRIOR TO THE COMMENCEMENT OF WORK. CONTRACTOR SHALL CONTACT HHM IF ANY DISCREPANCIES ARE DISCOVERED.

## UTILITIES

1. UTILITY BOXES AND LIDS IN PAVED AREAS SHALL BE DESIGNED FOR H-20 LOADING.
2. MANHOLES THAT ARE LOCATED IN UNPAVED AREAS SHALL HAVE BOLT DOWN COVERS.
3. CONTRACTOR TO COORDINATE THE ADJUSTMENT TO FINISH GRADE OF ALL PG&E, AT&T, CABLE, FIBER OPTIC OR OTHER UTILITY MANHOLES AND VAULTS.
4. CONSTRUCTION OF ALL GRAVITY FLOWING UTILITIES SHALL PROCEED FROM THE DOWNSTREAM CONNECTION TO THE UPSTREAM CONNECTION. THIS WILL ALLOW FOR ANY NECESSARY ADJUSTMENTS TO BE MADE PRIOR TO THE INSTALLATION OF THE ENTIRE LINE. IF THE CONTRACTOR FAILS TO BEGIN AT THE DOWNSTREAM CONNECTION POINT AND WORK UPSTREAM, CONTRACTOR SHALL PROCEED AT CONTRACTOR'S OWN RISK AND BE RESPONSIBLE FOR ANY ADJUSTMENTS NECESSARY.
5. PROPOSED WATER SYSTEM SHOWN ON CIVIL PLANS IS GRAPHICAL AND FOR COORDINATION PURPOSES ONLY. SEE PLANS BY OTHERS.
6. PROPOSED ELECTRIC, GAS, TELEPHONE, CABLE AND JOINT TRENCH INFORMATION SHOWN ON CIVIL PLANS IS GRAPHICAL AND FOR COORDINATION PURPOSES ONLY. SEE JOINT TRENCH PLANS.

## STATEMENT OF RESPONSIBILITY

CONTRACTOR SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY. THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OR WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

## LEGEND

	PROPOSED	EXISTING
PROJECT BOUNDARY	---	---
PROPERTY LINE	---	---
RIGHT OF WAY	---	---
EASEMENT	---	---
CURB AND GUTTER	---	---
SIDEWALK	---	---
STREET MONUMENT	---	---
CENTERLINE	---	---
SANITARY SEWER	SS	SS(E)
SANITARY SEWER MANHOLE		
SANITARY LATERAL		
SANITARY SEWER CLEAN OUT		
STORM DRAIN LINE		SD(E)
STORM DRAIN MANHOLE		
STORM DRAIN CURB INLET		
STORM DRAIN FIELD INLET		
DRIVEWAY		
WHEELCHAIR RAMP		
TREE		
AC PAVEMENT OVERLAY		
AC PAVEMENT GRIND		
AC DEEP LIFT (AC PLUG)		
SAWCUT LINE		
DETAIL CALLOUT		
WATER MAIN		
WATER VALVE		
WATER SERVICE AND METER		
RECLAIMED WATER	RW	
FIRE HYDRANTS		
STREET SIGN		
ELECTROLIER		
UTILITY POLE		
STREET LIGHT		
PULL BOX		
GAS		
OVERHEAD		
AT&T		
COMCAST		
FIBER OPTIC	FO	FO(E)
ELECTRICAL	E	E(E)
THERMAL PIPE		
AUTOMATED WASTE COLLECTION SYSTEM		

## ABBREVIATIONS

@	AT
ABN	ABANDONED
AC	ASPHALTIC CONCRETE
ANG PT	ANGLE POINT
ARV	AIR RELEASE VALVE
AWCS	AUTOMATED WASTE COLLECTION SYSTEM
BC	BEGIN CURVE
BOA	BLOW OFF ASSEMBLY
BOW	BACK OF WALK
BW	BOTTOM OF WALL
CL/C	CENTER LINE
CSJ	CITY OF SAN JOSE DETAIL
DIP	DUCTILE IRON PIPE
DW	DRIVEWAY
EC	END CURVE
ELEC	ELECTRIC
EL/ELEV	ELEVATION
EP	EDGE OF PAVEMENT
ER	END OF RETURN
ESMT	EASEMENT
EX(E)	EXISTING
FG	FINISHED GRADE
FH	FIRE HYDRANT
FL	FLOW LINE
FOC/FC	FACE OF CURB
G	GAS
GB	GRADE BREAK
HORIZ	HORIZONTAL
HP	HIGH POINT
INV	INVERT
IRR	IRRIGATION
JT	JOINT TRENCH
LP	LOW POINT
LT, RT	LEFT, RIGHT
MUTCD	CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES
MIN	MINIMUM
NTS	NOT TO SCALE
PCC	POINT OF COMPOUND CURVATURE
PI	POINT OF INTERSECTION
P / PL	PROPERTY LINE
POC	POINT ON CURVE
PRC	POINT OF REVERSE CURVE
PSE	PUBLIC SERVICE EASEMENT
PUE	PUBLIC UTILITY EASEMENT
PVMT	PAVEMENT
RAD/R	RADIUS
(R)	REMOVE
RCP	REINFORCED CONCRETE PIPE
RCW	RECLAIMED WATER
RW	RIGHT OF WAY
S	SLOPE
SD	STORM DRAIN
SDCB	STORM DRAIN CATCH BASIN
SDCI	STORM DRAIN CURB INLET
SDFI	STORM DRAIN FIELD INLET
SDJB	STORM DRAIN JUNCTION BOX
SDMH	STORM DRAIN MANHOLE
SL	STREET LIGHT
SS	SANITARY SEWER
SSCO	SANITARY SEWER CLEANOUT
SSFI	SANITARY SEWER FLUSHING INLET
SSFM	SANITARY SEWER FORCE MAIN
SSMH	SANITARY SEWER MANHOLE
STA	STATION
STD	STANDARD
SW	SIDEWALK
TBD	TO BE DETERMINED
TBV	TO BE VERIFIED
TC	TOP OF CURB
TDC	TOP OF DEPRESSED CURB
TP	THERMAL PIPE
TRC	TOP OF ROLLED CURB
TVC	TOP OF VERTICAL CURB
TW	TOP OF WALL
VERT	VERTICAL
VOP	VITRIFIED CLAY PIPE
W	WATER
WM	WATER METER
WV	WATER VALVE



1570 Oakland Road  
San Jose, CA 95131

(408) 487-2200  
HHM-hca.com

DATE:	SEPTEMBER 8, 2020
SCALE:	NTS
DESIGNED:	RH
DRAWN:	LA/RM/JBC
CHECKED:	RH
PROJ. ENGR:	RH
FILE:	571900IP.DWG



PRELIMINARY  
NOT FOR CONSTRUCTION

PLAN  
FOR THE IMPROVEMENT OF THE  
DOWNTOWN WEST UTILIDOR  
NOTES, LEGEND, AND  
ABBREVIATIONS

SAN JOSE

CALIFORNIA

PERMIT #  
PROJECT #

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER

NAME DATE

DEPARTMENT OF TRANSPORTATION

NAME DATE

MUNICIPAL WATER

NAME DATE

DEPARTMENT OF TRANSPORTATION - OPS

NAME DATE

STREETLIGHT LAYOUT

NAME DATE

ELECTRICAL CIRCUITS

NAME DATE

DEPARTMENT OF PUBLIC WORKS



APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 2 OF 15


1ST SUBMITTAL

CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR ALL SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF PERSONS AND PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR OBTAINING ALL NECESSARY INSURANCE AND THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

S:\PROJECTS\571900L\DWG\COACHMENT PERMIT\01 DRAWINGS\571900\01P\ COVER NOTES DETAILS.DWG, 8/16/2020 2:38 PM

PIPE SIZE	LIMITS OF X	
	MINIMUM	MAXIMUM
24" OR LESS	4"	4" + $\frac{O.D.}{4}$
27" AND GREATER	6"	6" + $\frac{O.D.}{4}$

BEDDING TYPE	CATEGORY OF PIPE
A	VITRIFIED CLAY PIPE, CONCRETE PIPE 25" DIA. AND GREATER
B	CONCRETE PIPE 24" DIA. AND LESS
C	DUCTILE IRON PIPE

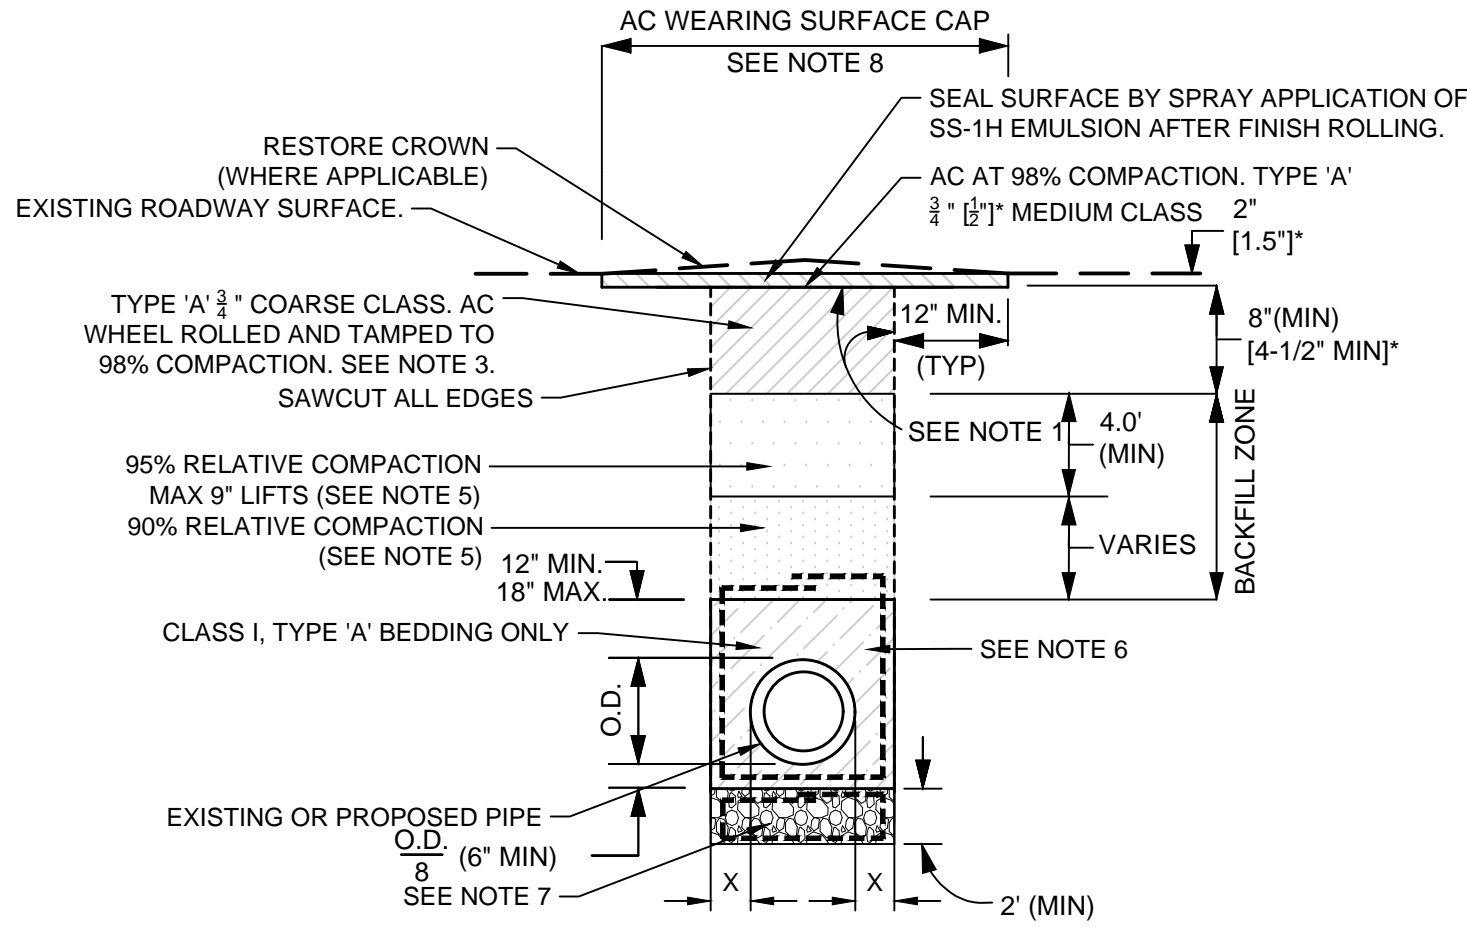


- EXISTING STREET TRENCH NOTES:
- CLEAN AND TACK COAT ON BOTH SIDES OF EXCAVATED TRENCH & BETWEEN AC COURSES WITH SPRAY APPLICATION OF SS-1H BINDER BEFORE PLACING AC SURFACE.
  - PLACE A TOTAL OF 10" OR EXISTING +3" AC BASE TO FINISH GRADE, WHICHEVER THICKNESS IS GREATER. AC BASE SHALL BE PLACED IN A MINIMUM OF 2 LIFTS. GRIND ENTIRE WEARING SURFACE CAP WIDTH INCLUDING AC BASE AND EXISTING SURFACE TO DEPTH OF 2" (1.5") BELOW FINISH GRADE JUST PRIOR TO PLACING AC SURFACE.
  - 2" (1.5") SURFACE CAP SHALL BE PLACED THE SAME DAY AS THE PAVEMENT GRINDING, OR COVERED WITH NON-SKID STEEL PLATES COUNTERSUNK FLUSH WITH THE ADJACENT GRADES UNTIL THE AC SURFACE CAN BE PLACED.
  - SHOVEL - SLICING OF BEDDING MATERIAL IN THE HAUNCH AREAS IS REQUIRED WHEN BEDDING IS NO HIGHER THAN THE QUARTER POINT OF THE PIPE.
  - THE CONTRACTOR SHALL USE CLASS III AGGREGATE BASE, 3/4" MAXIMUM GRADATION AS BACKFILL MATERIAL AND SHALL CONFORM TO SECTION 26 OF THE STANDARD SPECIFICATIONS.
  - GEOTEXTILE TO BE PLACED BETWEEN CLASS III AB AND BEDDING IF THE NATIVE SOIL SURROUNDING THE TRENCH IS FOUND TO BE HEAVY CLAY. FOR ALL OTHER NATIVE SOIL CONDITIONS THE GEOTEXTILE SHALL BE WRAPPED AROUND THE ENTIRE TRENCH AS SHOWN.
  - GEOTEXTILE AND CLASS I, BEDDING STABILIZATION MATERIAL SHALL BE USED FOR UNSUITABLE SOIL CONDITIONS ONLY OR AS DIRECTED BY CITY ENGINEER/INSPECTOR.
  - WIDTH OF FINAL AC WEARING CAP SHALL BE 6FT MINIMUM OR THE TRENCH WIDTH PLUS 2 FT MIN, WHICHEVER IS GREATER.

\* [MINOR/RESIDENTIAL STREET]

## 2 CSJ EXISTING STREET TRENCH RESTORATION

NTS

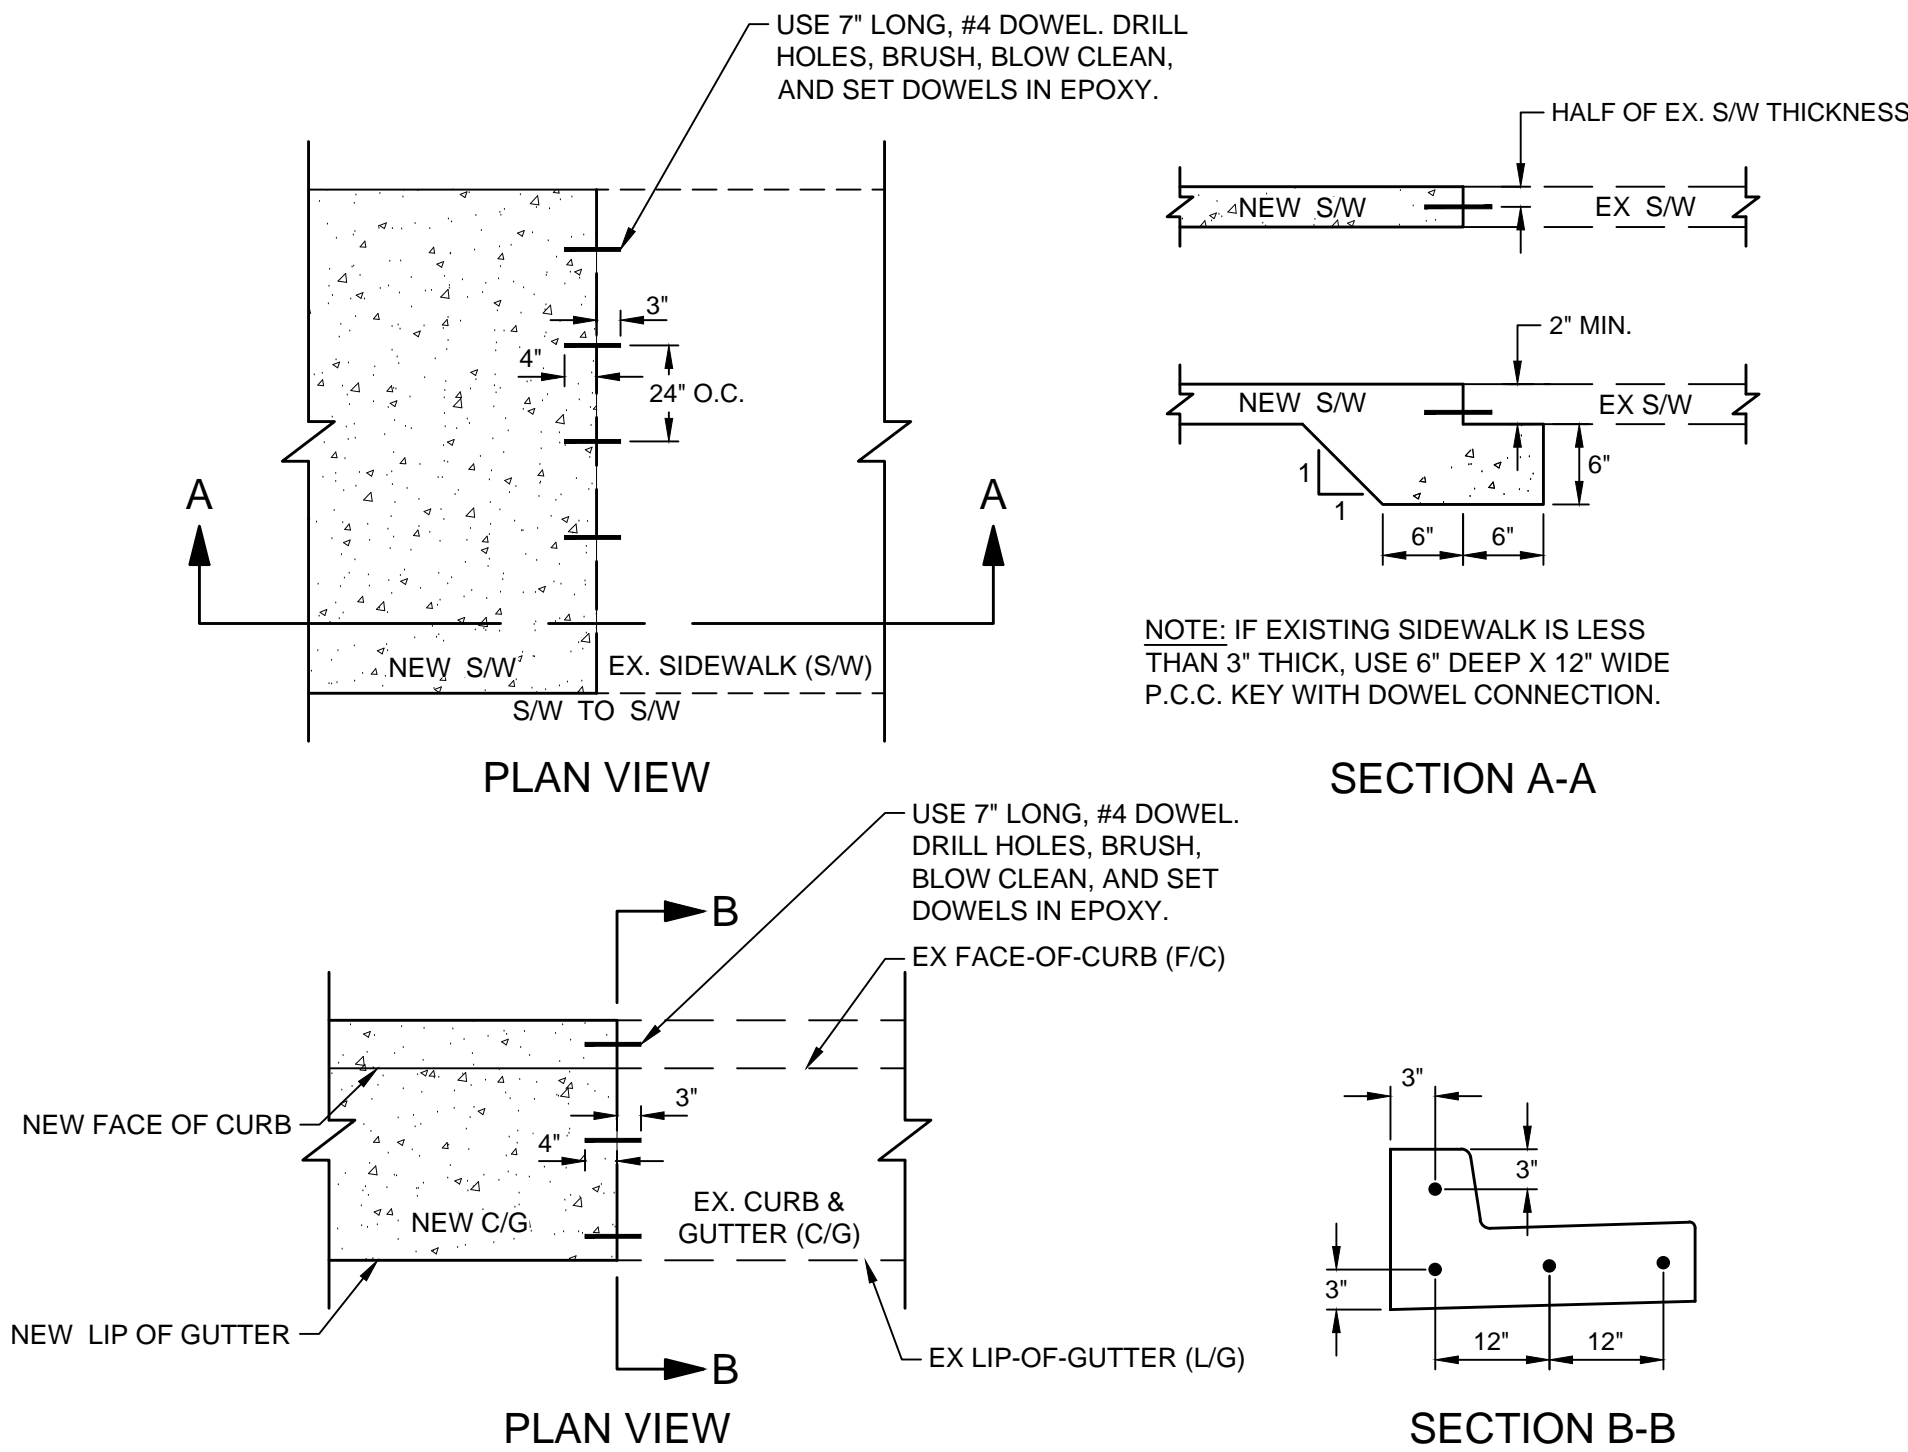

## 1 DOWEL CONNECTIONS

NTS



1570 Oakland Road  
San Jose, CA 95131  
(408) 487-2200  
HMHca.com

DATE:	SEPTEMBER 8, 2020
SCALE:	NTS
DESIGNED:	RH
DRAWN:	LA/RM/JBC
CHECKED:	RH
PROJ. ENGR:	RH
FILE:	571900IP.DWG



PRELIMINARY  
NOT FOR CONSTRUCTION

PLAN  
FOR THE IMPROVEMENT OF THE  
DOWNTOWN WEST UTILIDOR  
DETAILS

SAN JOSE

CALIFORNIA

PERMIT #  
PROJECT #

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER

NAME DATE

DEPARTMENT OF TRANSPORTATION

NAME DATE

MUNICIPAL WATER

NAME DATE

DEPARTMENT OF TRANSPORTATION - OPS

NAME DATE

STREETLIGHT LAYOUT

NAME DATE

ELECTRICAL CIRCUITS

NAME DATE

DEPARTMENT OF PUBLIC WORKS





APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 3 OF 15

1ST SUBMITTAL



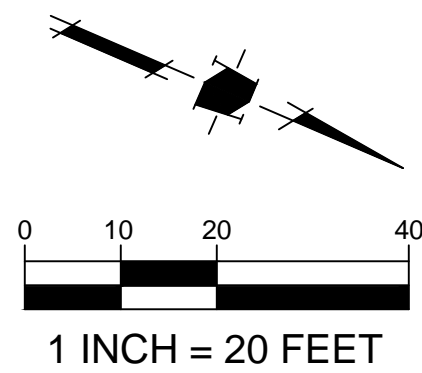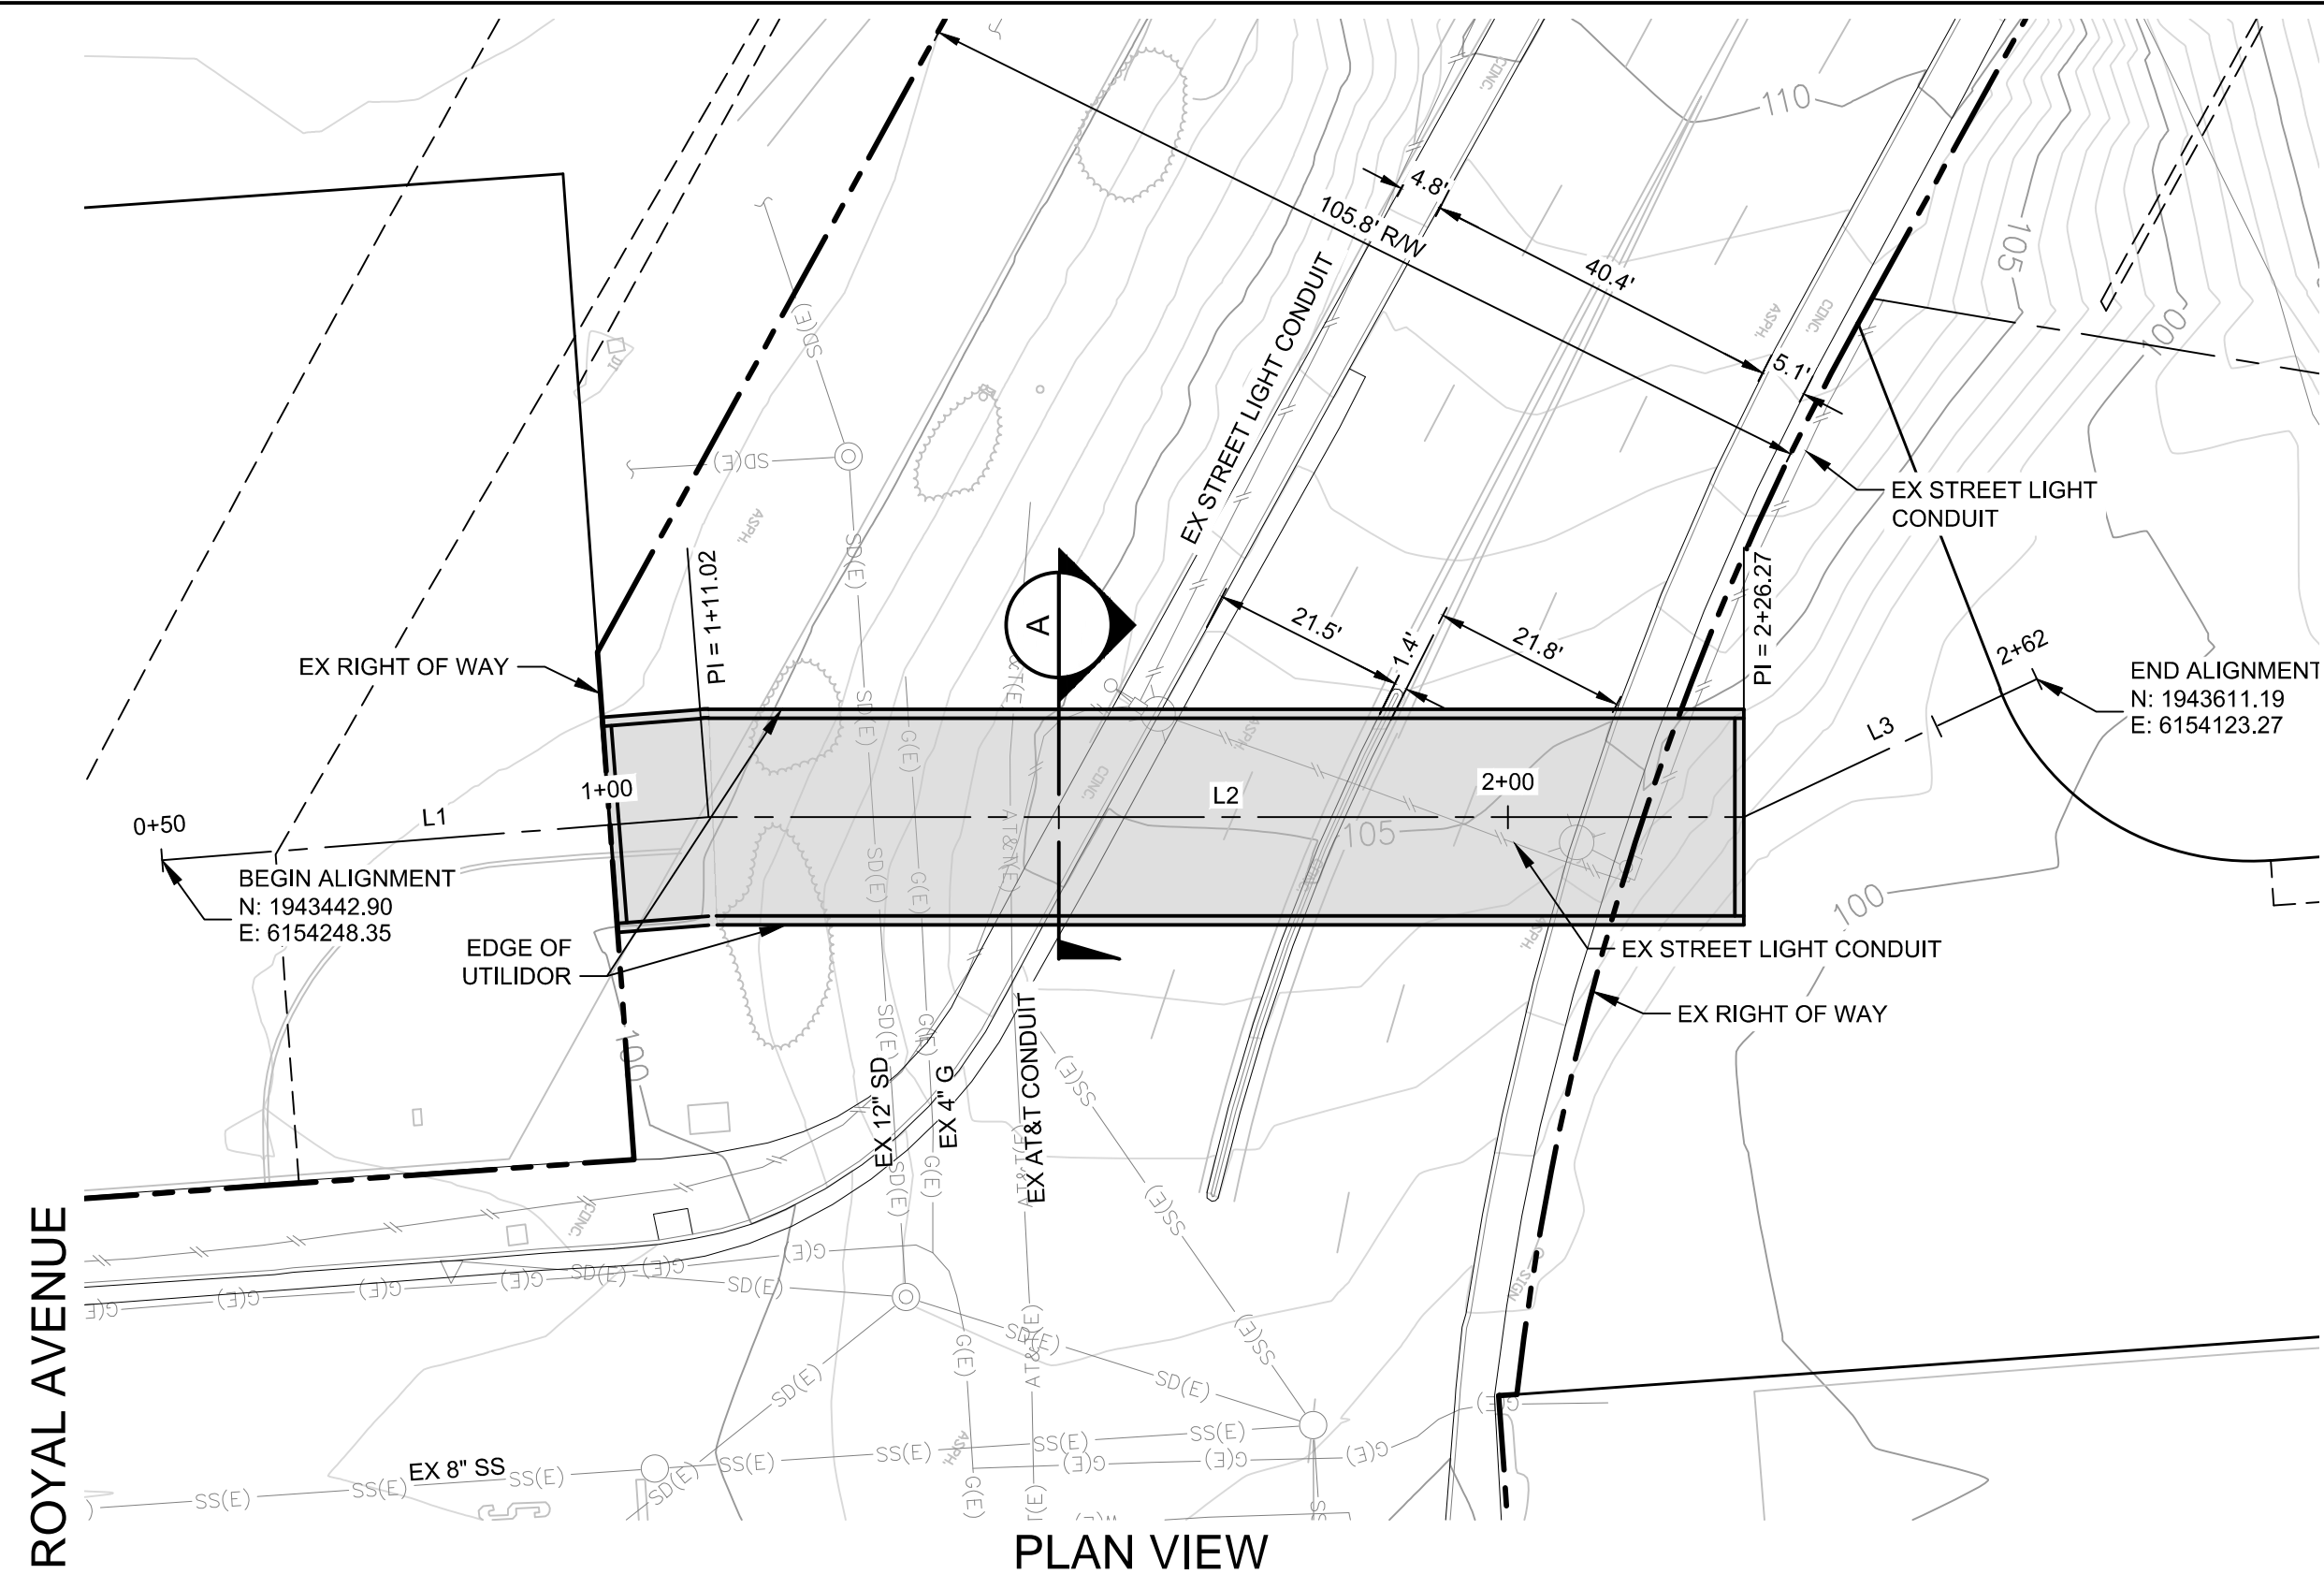

LINE TABLE		
LINE	LENGTH	BEARING
L1	61.02'	N35°36'56\"/>
L2	115.25'	N31°05'57\"/>
L3	36.07'	N56°19'22\"/>



### NOTES

- PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

### CAUTION:


PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES. CONTRACTOR TO VERIFY LOCATION PRIOR TO CONSTRUCTION OF ANY IMPROVEMENTS.

1+00 2+00

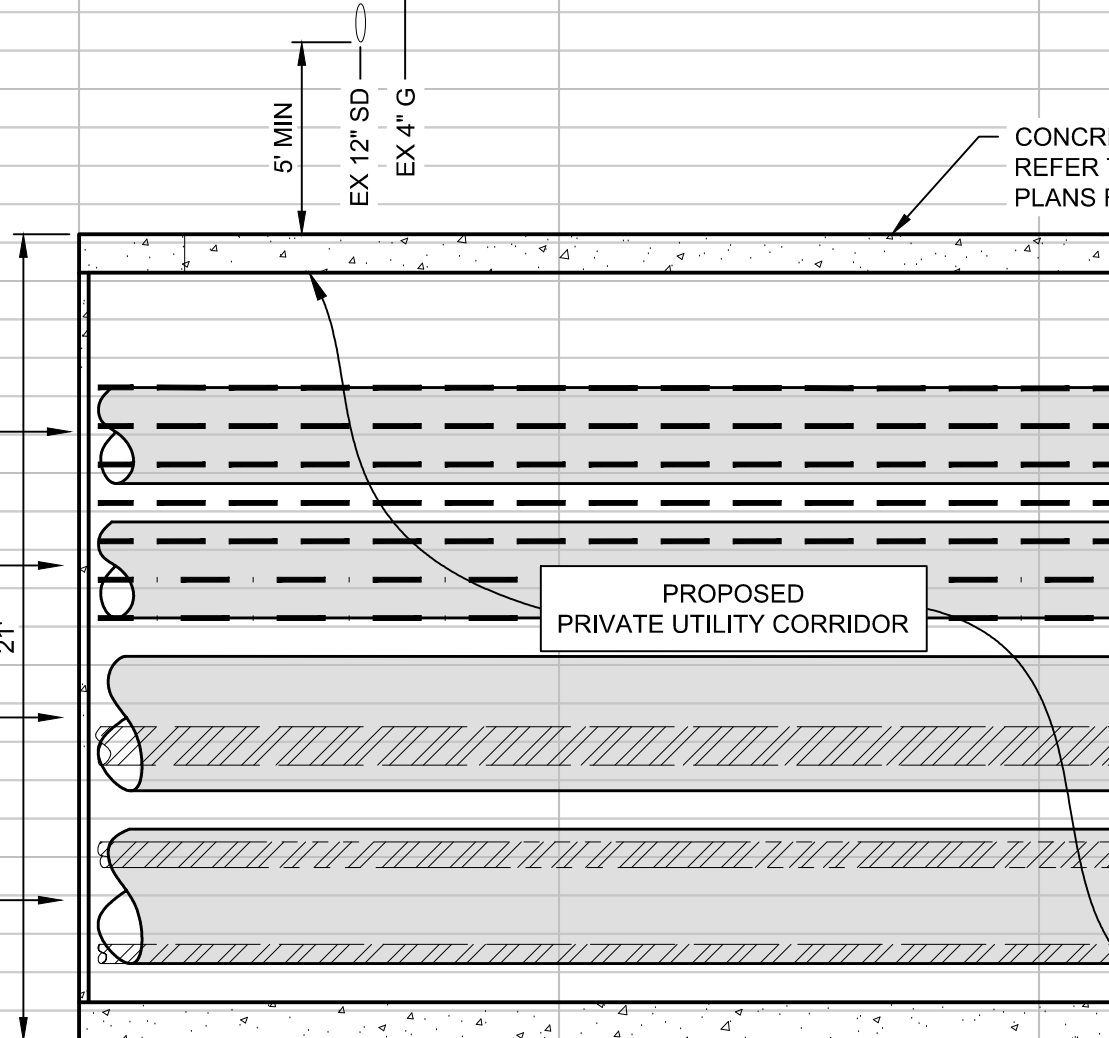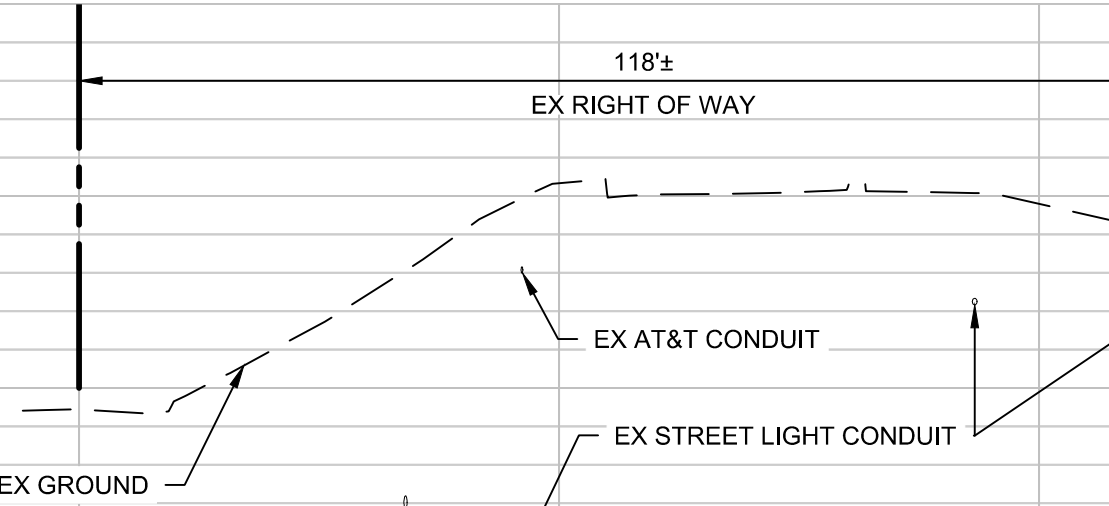

PROFILE VIEW  
1\"/>

SECTION A  
STATION 1+50.00  
1\"/>

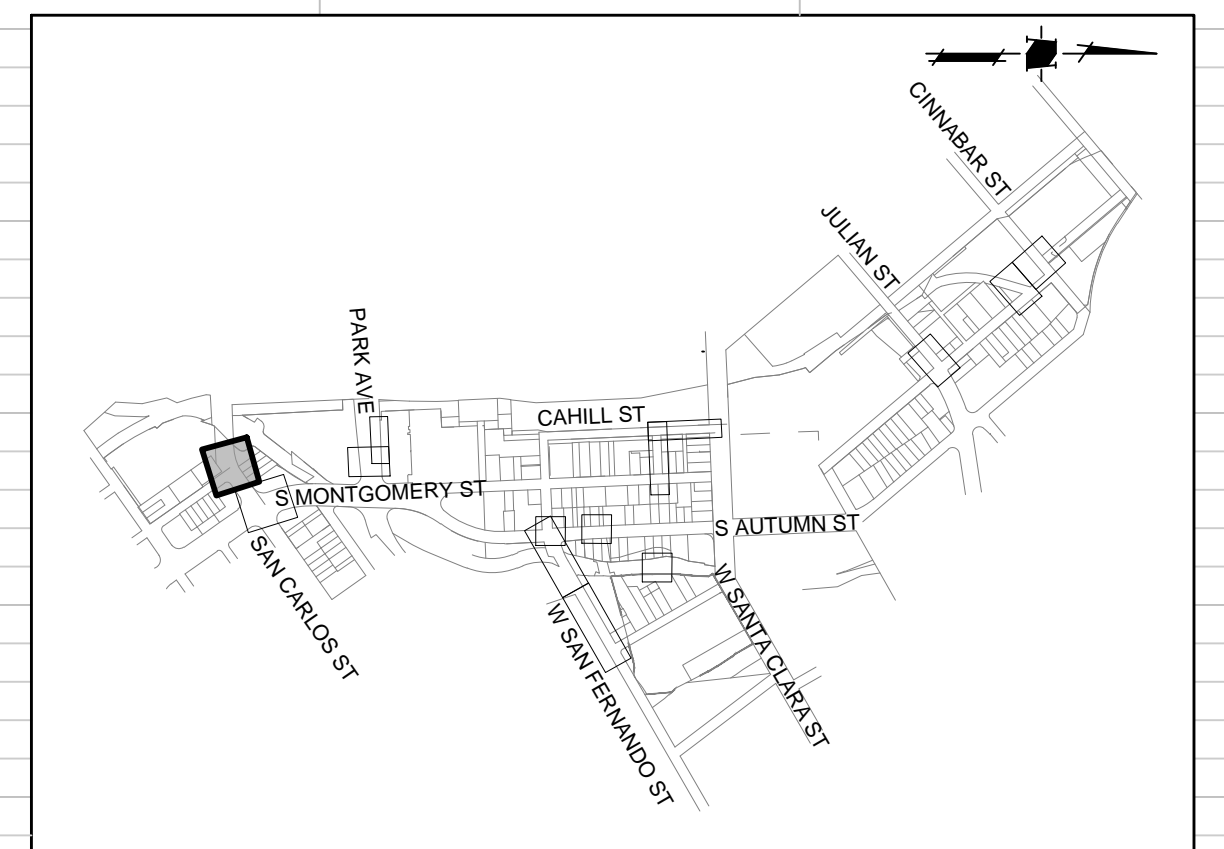

KEYMAP  
SCALE: NTS



DATE:	SEPTEMBER 8, 2020
SCALE:	AS SHOWN
DESIGNED:	RH
DRAWN:	LA/RM/JBC
CHECKED:	RH
PROJ. ENGR:	RH
FILE:	571900IP.DWG



**PRELIMINARY  
NOT FOR CONSTRUCTION**

PLAN  
FOR THE IMPROVEMENT OF THE  
**DOWNTOWN WEST UTILIDOR  
WEST SAN CARLOS STREET**

SAN JOSE

CALIFORNIA

PERMIT #  
PROJECT #

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER

NAME	DATE
DEPARTMENT OF TRANSPORTATION	
NAME	DATE
MUNICIPAL WATER	
NAME	DATE

DEPARTMENT OF TRANSPORTATION - OPS

NAME	DATE
STREETLIGHT LAYOUT	
NAME	DATE
ELECTRICAL CIRCUITS	
NAME	DATE

DEPARTMENT OF PUBLIC WORKS



APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS


SHEET 4 OF 20

1ST SUBMITTAL



CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR ALL SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF PERSONS AND PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR THE PROTECTION OF ALL EXISTING UTILITIES AND STRUCTURES. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

S:\PROJECTS\571900\DWG\CONSTRUCTION PERMITS\CT DRAWINGS\571900\DWG\PLAN PROFILE\UTILIDOR 01.DWG, 9/3/2020 4:11 PM

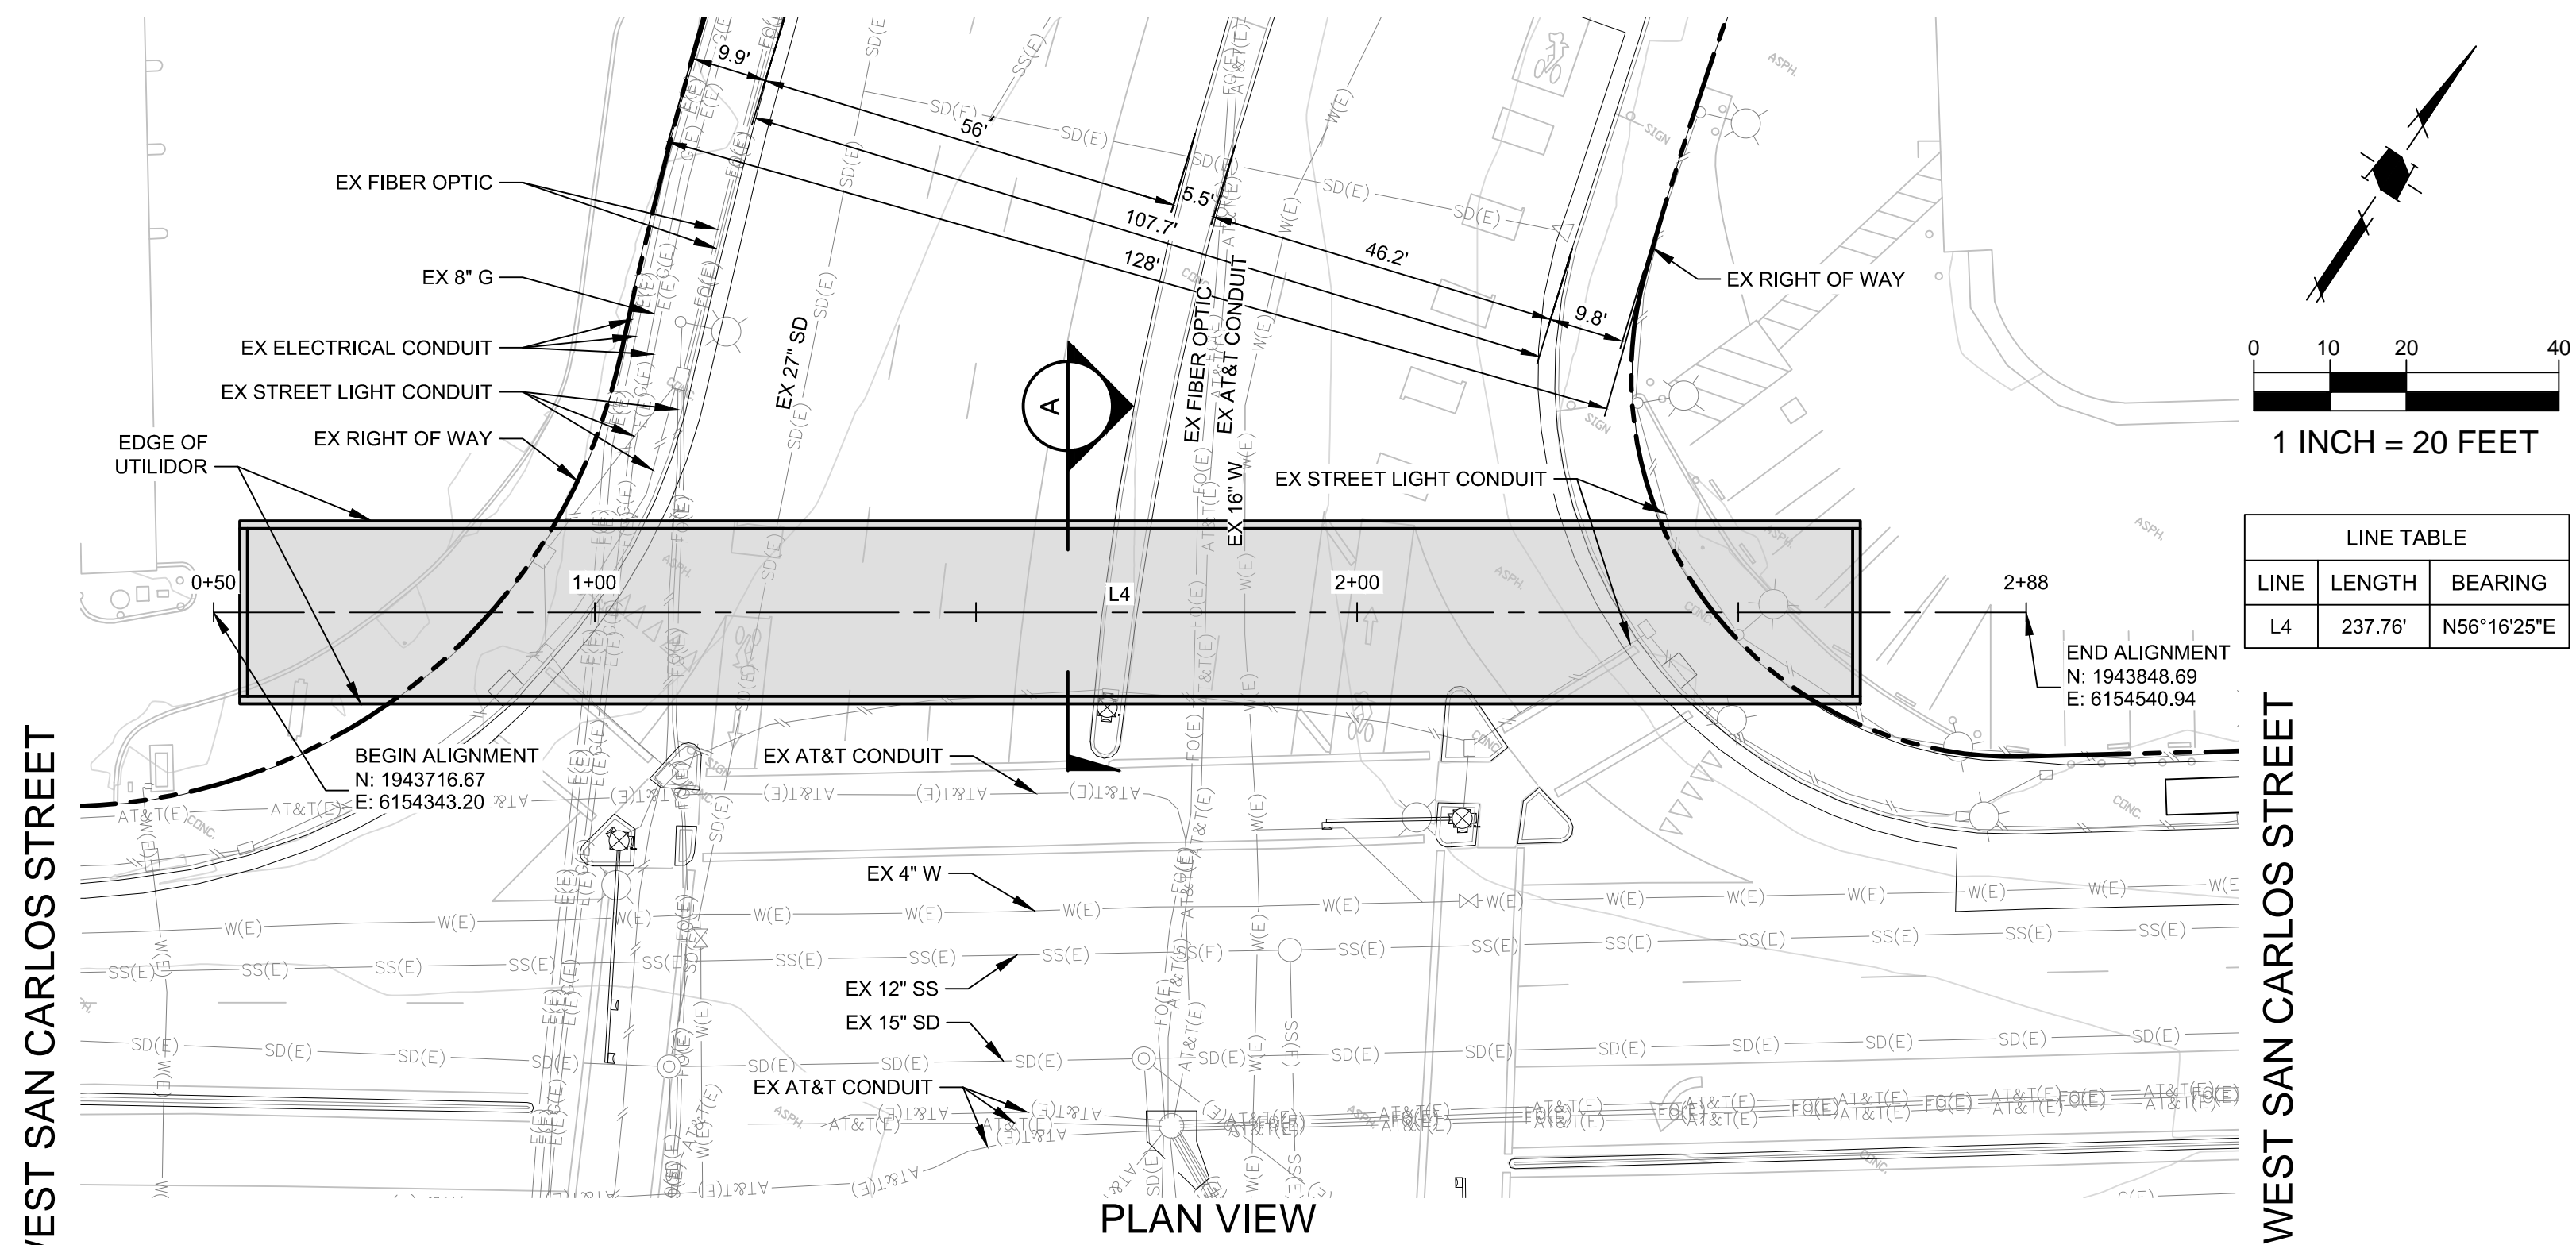


## NOTES

- PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

## CAUTION:

PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES. CONTRACTOR TO VERIFY LOCATION PRIOR TO CONSTRUCTION OF ANY IMPROVEMENTS.

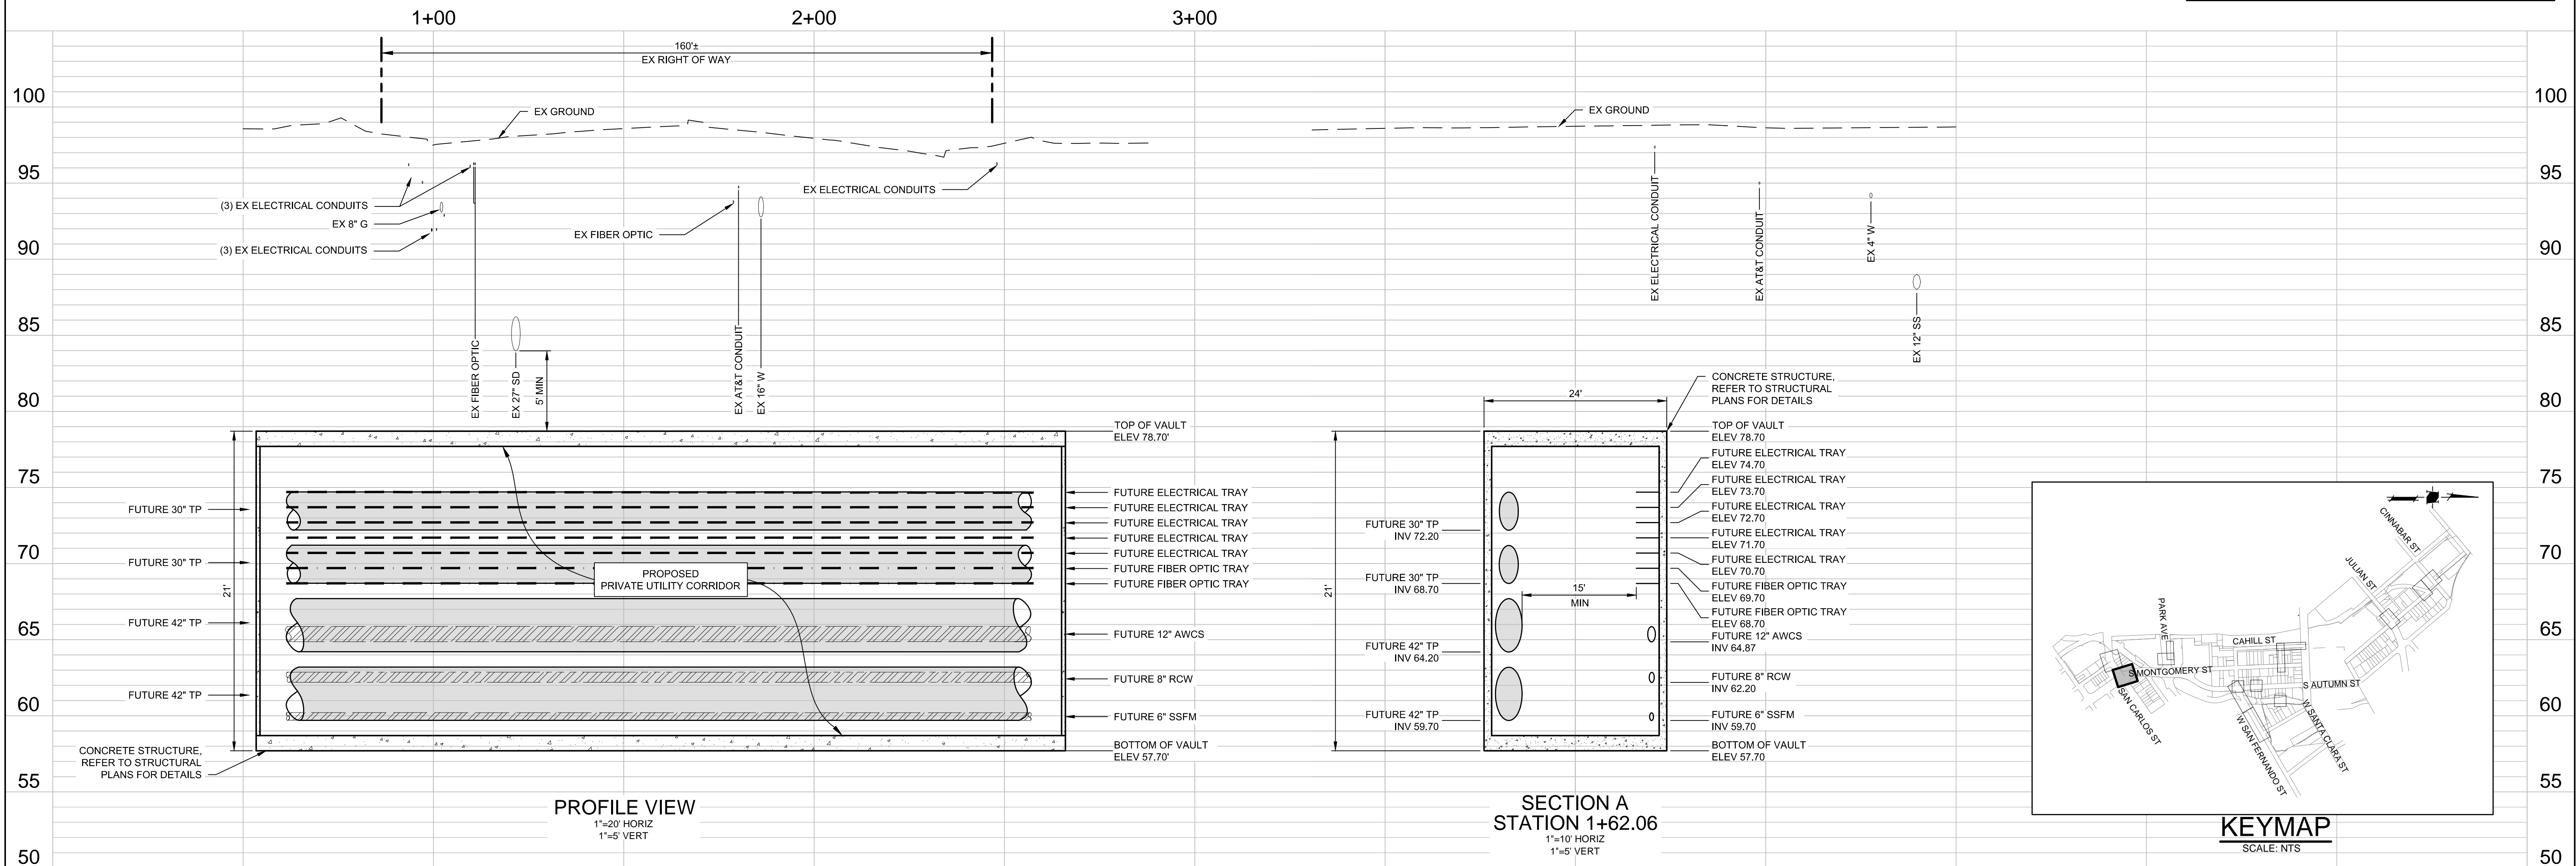

1570 Oakland Road  
San Jose, CA 95131  
(408) 487-2200  
HMHca.com

DATE: SEPTEMBER 8, 2020  
SCALE: AS SHOWN  
DESIGNED: RH  
DRAWN: LA/RM/JBC  
CHECKED: RH  
PROJ. ENGR: RH  
FILE: 571900IP.DWG



**PRELIMINARY  
NOT FOR CONSTRUCTION**

PLAN  
FOR THE IMPROVEMENT OF THE  
**DOWNTOWN WEST UTILIDOR  
SOUTH MONTGOMERY STREET**

SAN JOSE

CALIFORNIA

PERMIT #  
PROJECT #

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER

NAME \_\_\_\_\_ DATE \_\_\_\_\_  
DEPARTMENT OF TRANSPORTATION  
NAME \_\_\_\_\_ DATE \_\_\_\_\_  
MUNICIPAL WATER  
NAME \_\_\_\_\_ DATE \_\_\_\_\_

DEPARTMENT OF TRANSPORTATION - OPS

NAME \_\_\_\_\_ DATE \_\_\_\_\_  
STREETLIGHT LAYOUT  
NAME \_\_\_\_\_ DATE \_\_\_\_\_  
ELECTRICAL CIRCUITS  
NAME \_\_\_\_\_ DATE \_\_\_\_\_

DEPARTMENT OF PUBLIC WORKS





APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 5 OF 20

1ST SUBMITTAL

CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY. THAT THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS, AND THAT THE CONTRACTOR SHALL DESIGN, INSTALL, MAINTAIN, AND MONITOR ALL SAFETY MEASURES THROUGHOUT THE PROJECT. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ANY NECESSARY PERMITS OR APPROVALS FROM THE OWNER OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

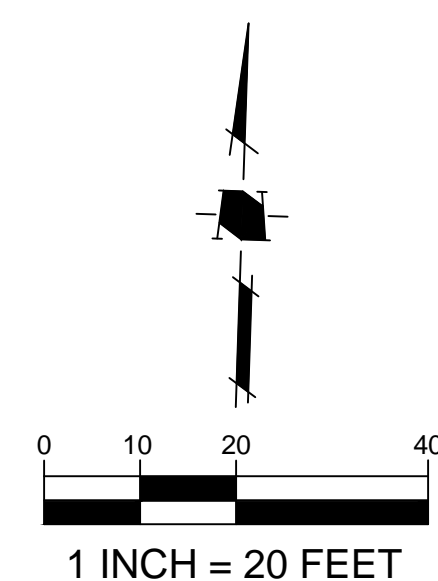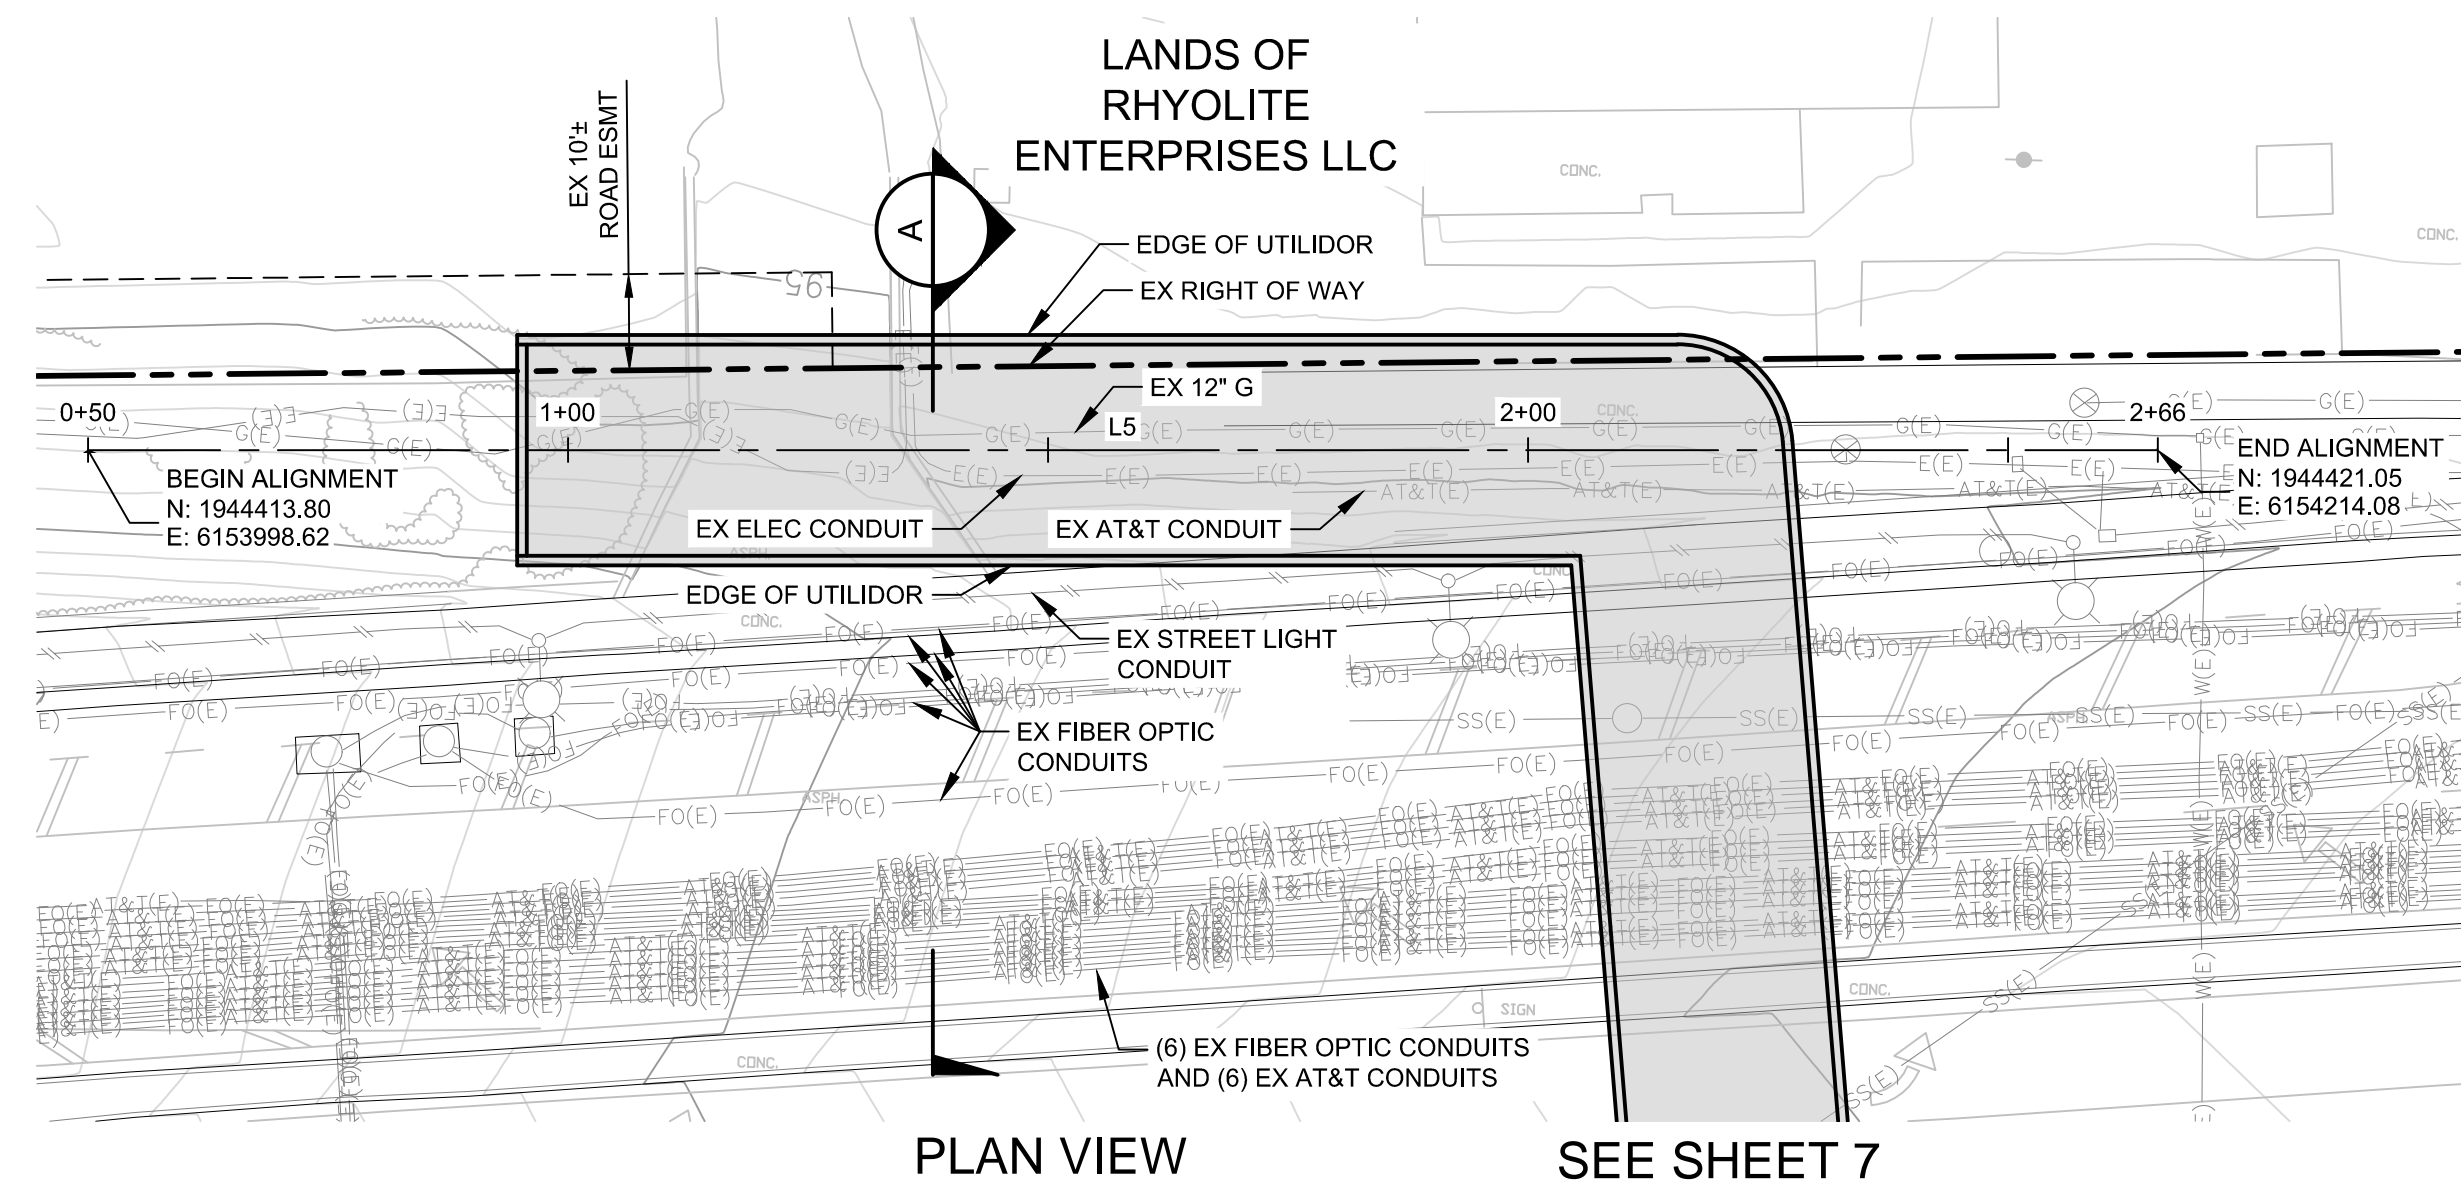


LINE TABLE		
LINE	LENGTH	BEARING
L5	215.58'	N88°04'21"E

## NOTES

1. PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

**CAUTION:**


PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO  
CONSTRUCTION OF ANY IMPROVEMENTS.

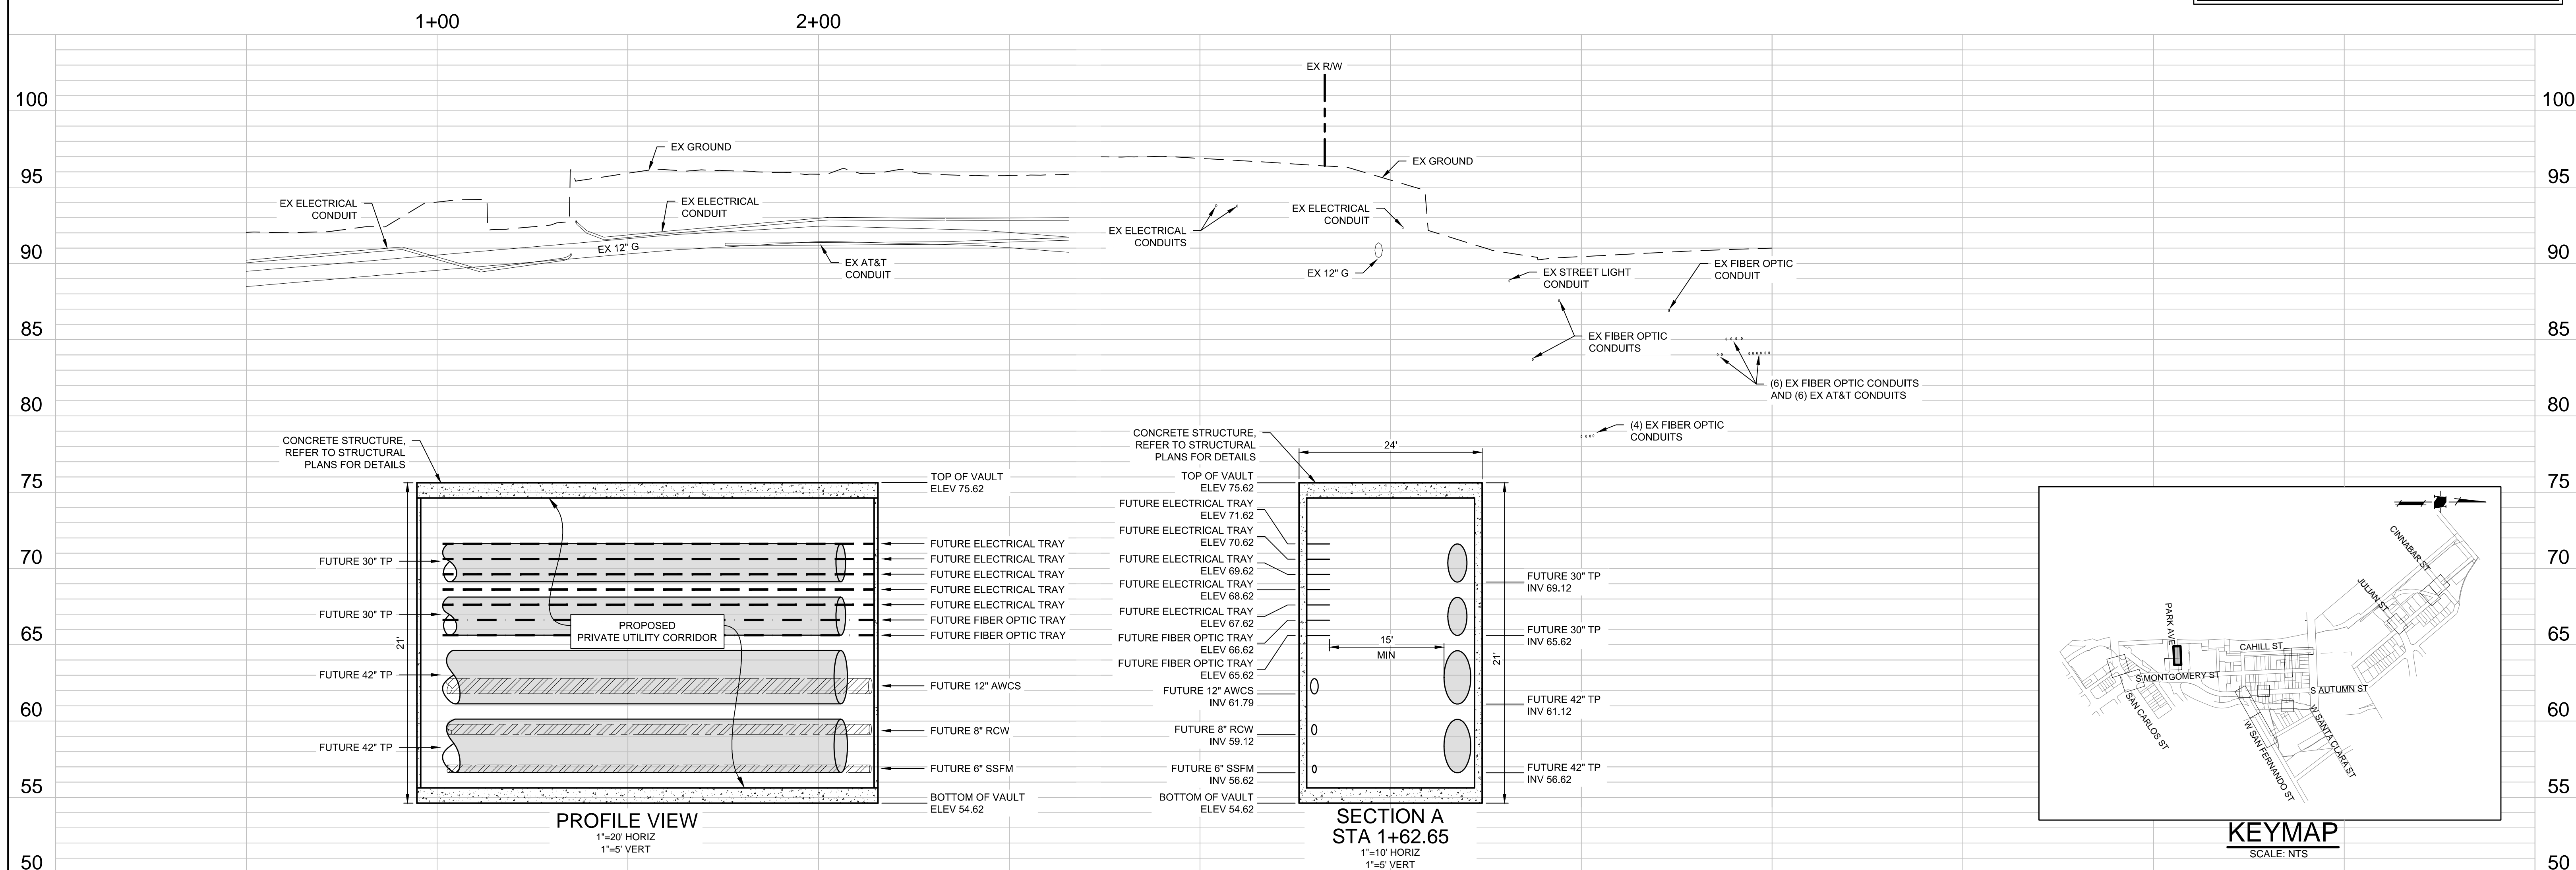

1570 Oakland Road  
San Jose, CA 95131

(408) 487-2200  
HMMca.com

DATE:	SEPTEMBER 8, 2020
SCALE:	AS SHOWN
DESIGNED:	RH
DRAWN:	LA/RM/JBC
CHECKED:	RH
PROJ. ENGR:	RH
FILE:	571900IP.DWG

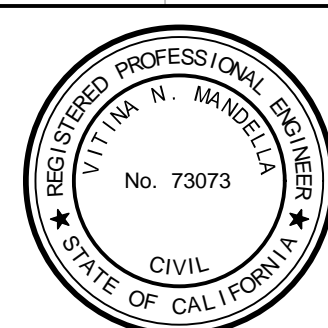

PRELIMINARY  
NOT FOR CONSTRUCTION

# PLAN FOR THE IMPROVEMENT OF THE DOWNTOWN WEST UTILIDOR PARK AVENUE

SAN JOSE

CALIFORNIA

PERMIT #	
PROJECT #	

PROJECT  
INSPECTOR  
VOICEMAIL:

PROJECT ENGINEER
------------------

NAME
DEPARTMENT OF TRANSPORTATION
NAME
MUNICIPAL WATER
NAME

DEPARTMENT OF TRANSPORTATION - OPS

NAME	DATE
STREETLIGHT LAYOUT	
NAME	DATE
ELECTRICAL CIRCUITS	
NAME	DATE

DEPARTMENT OF PUBLIC WORKS




APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 6 OF 20

1ST SUBMITTAL

CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR ALL SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF PERSONS AND PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR THE PROTECTION OF ALL EXISTING UTILITIES AND STRUCTURES. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

S:\PROJECTS\571900\DWG\CONTRACT\PERMITS\CT DRAWINGS\571900\DWG\PLAN PROFILE\UTILIDOR 01.DWG, 9/3/2020 4:13 PM

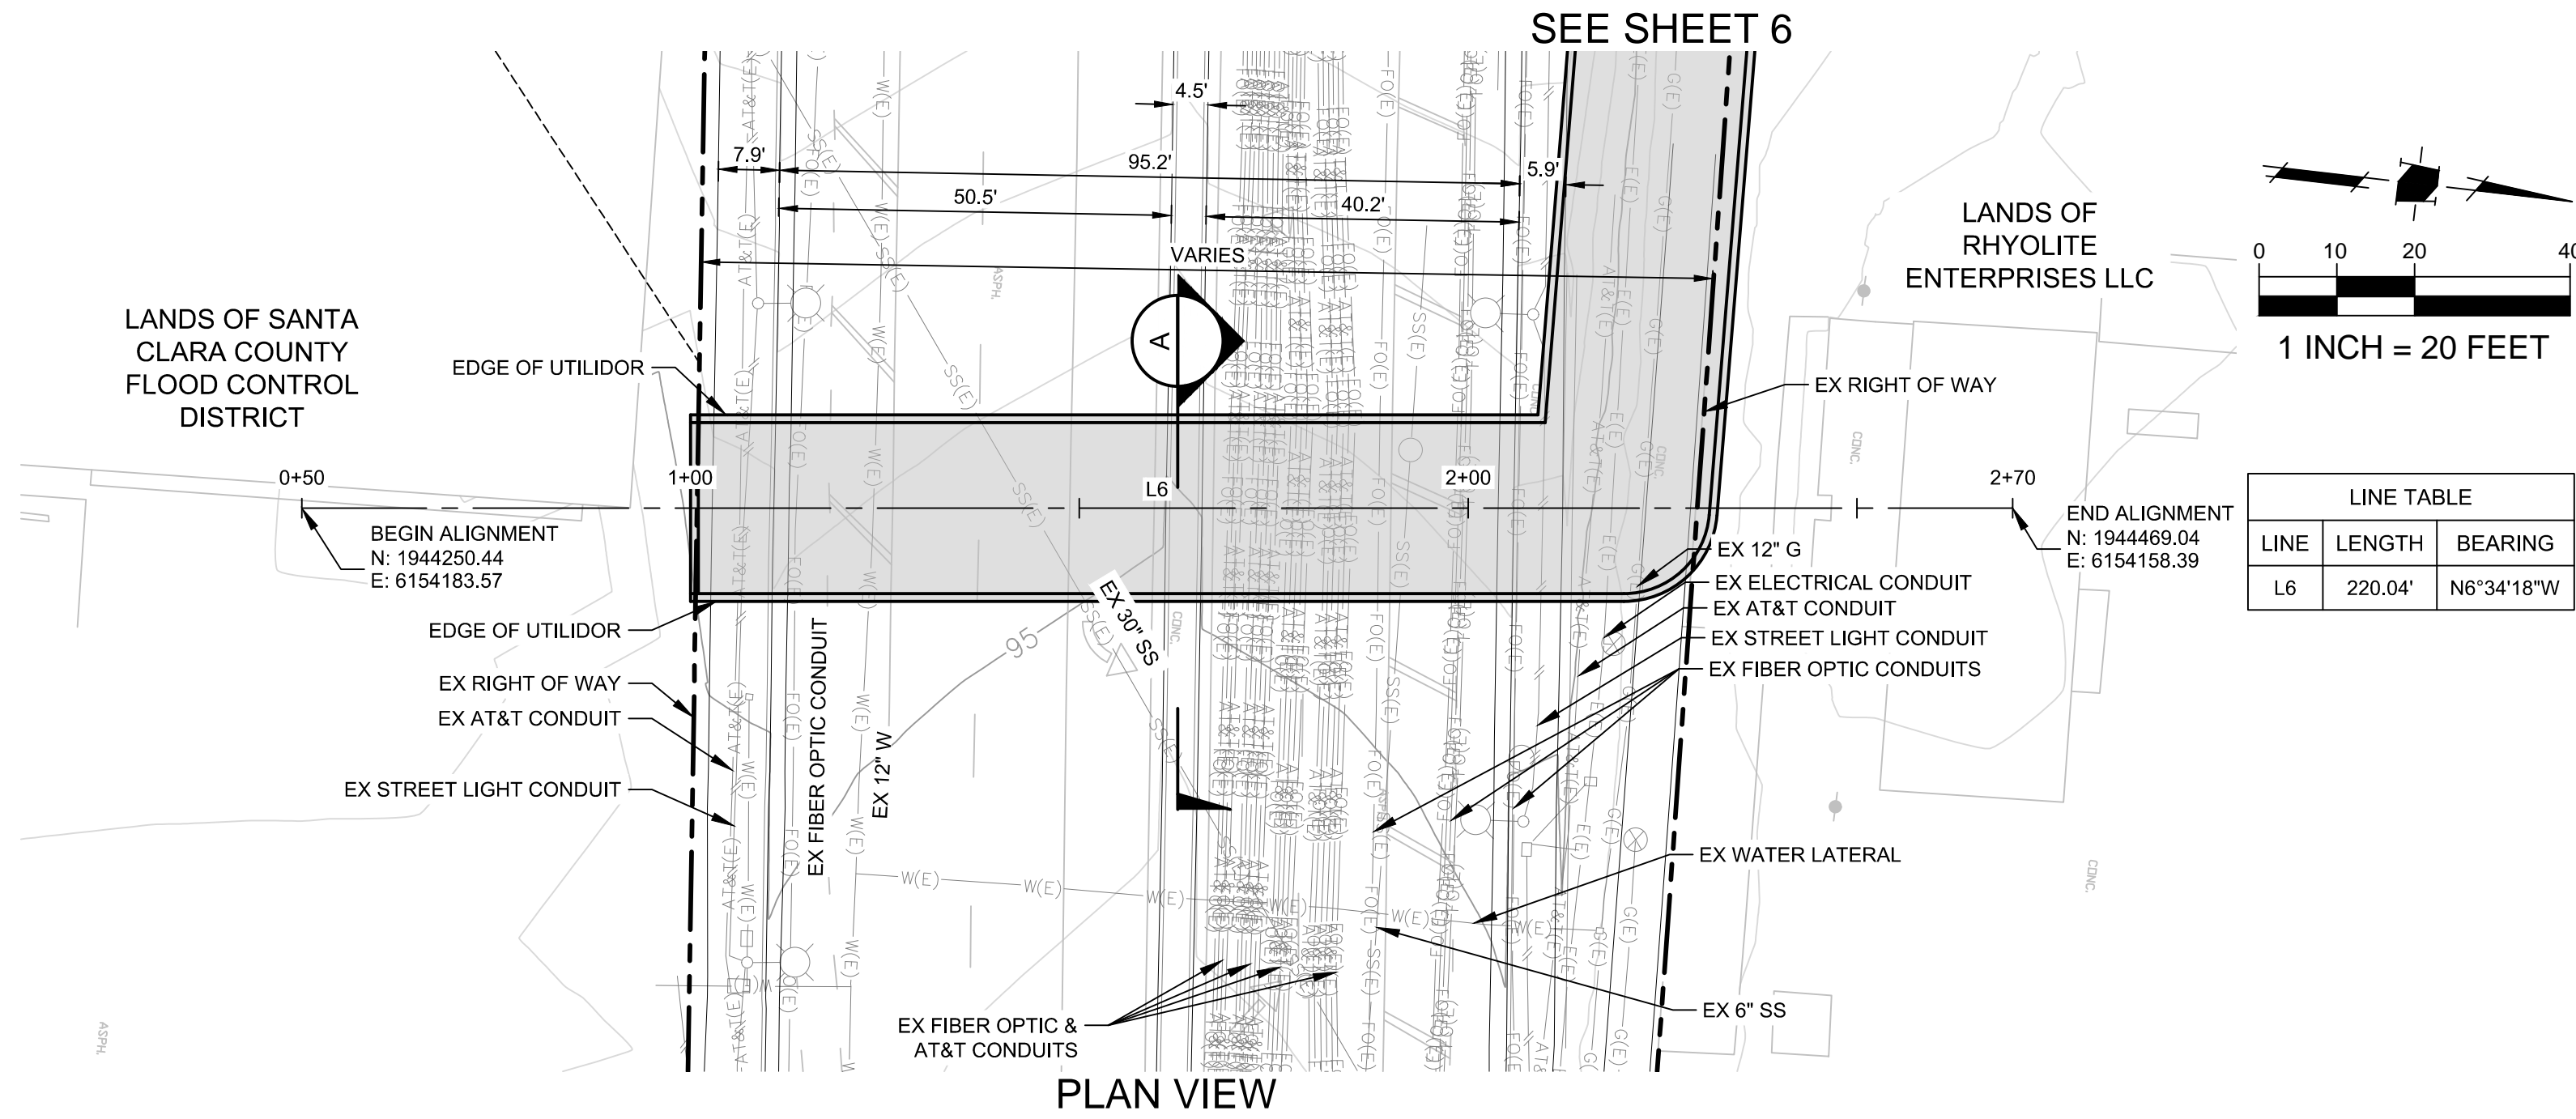


PARK AVENUE

NOTES

1. PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

**CAUTION:**  
PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO CONSTRUCTION OF ANY IMPROVEMENTS.

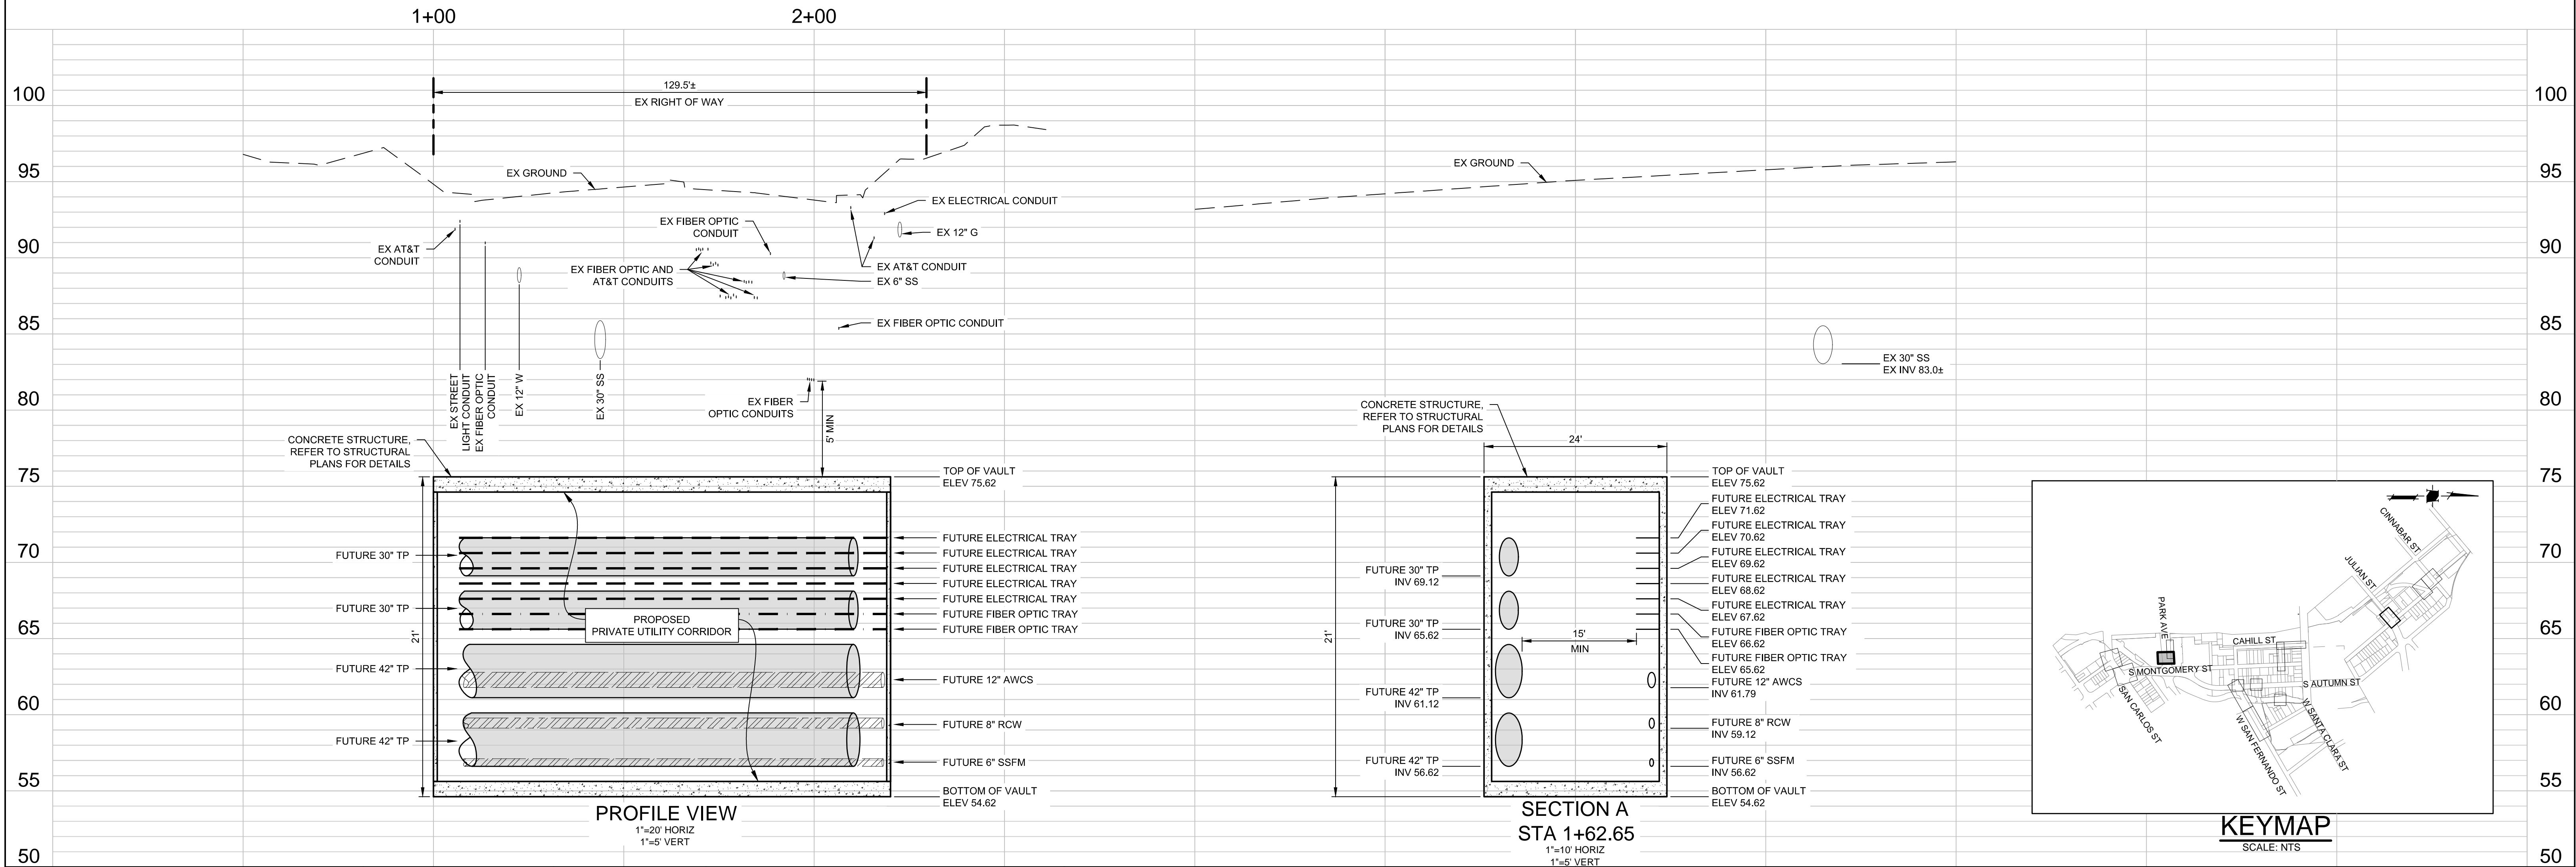

1570 Oakland Road  
San Jose, CA 95131  
(408) 487-2200  
HMHca.com

DATE: SEPTEMBER 8, 2020  
SCALE: AS SHOWN  
DESIGNED: RH  
DRAWN: LA/RM/JBC  
CHECKED: RH  
PROJ. ENGR: RH  
FILE: 571900IP.DWG



**PRELIMINARY  
NOT FOR CONSTRUCTION**

PLAN  
FOR THE IMPROVEMENT OF THE  
**DOWNTOWN WEST UTILIDOR**  
**PARK AVENUE**

SAN JOSE

CALIFORNIA

PERMIT #  
PROJECT #

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER

NAME  
DATE  
DEPARTMENT OF TRANSPORTATION  
NAME  
DATE  
MUNICIPAL WATER  
NAME  
DATE

DEPARTMENT OF TRANSPORTATION - OPS

NAME  
DATE  
STREETLIGHT LAYOUT  
NAME  
DATE  
ELECTRICAL CIRCUITS  
NAME  
DATE

DEPARTMENT OF PUBLIC WORKS



APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS


SHEET 7 OF 20

1ST SUBMITTAL



CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR ALL SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF PERSONS AND PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR THE PROTECTION OF ALL EXISTING UTILITIES AND STRUCTURES. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

S:\PROJECTS\571900\DWG\CONTRACT\PERMITS\CT DRAWINGS\571900\DWG\PLAN PROFILE\UTILIDOR 02.DWG, 9/3/2020 4:15 PM

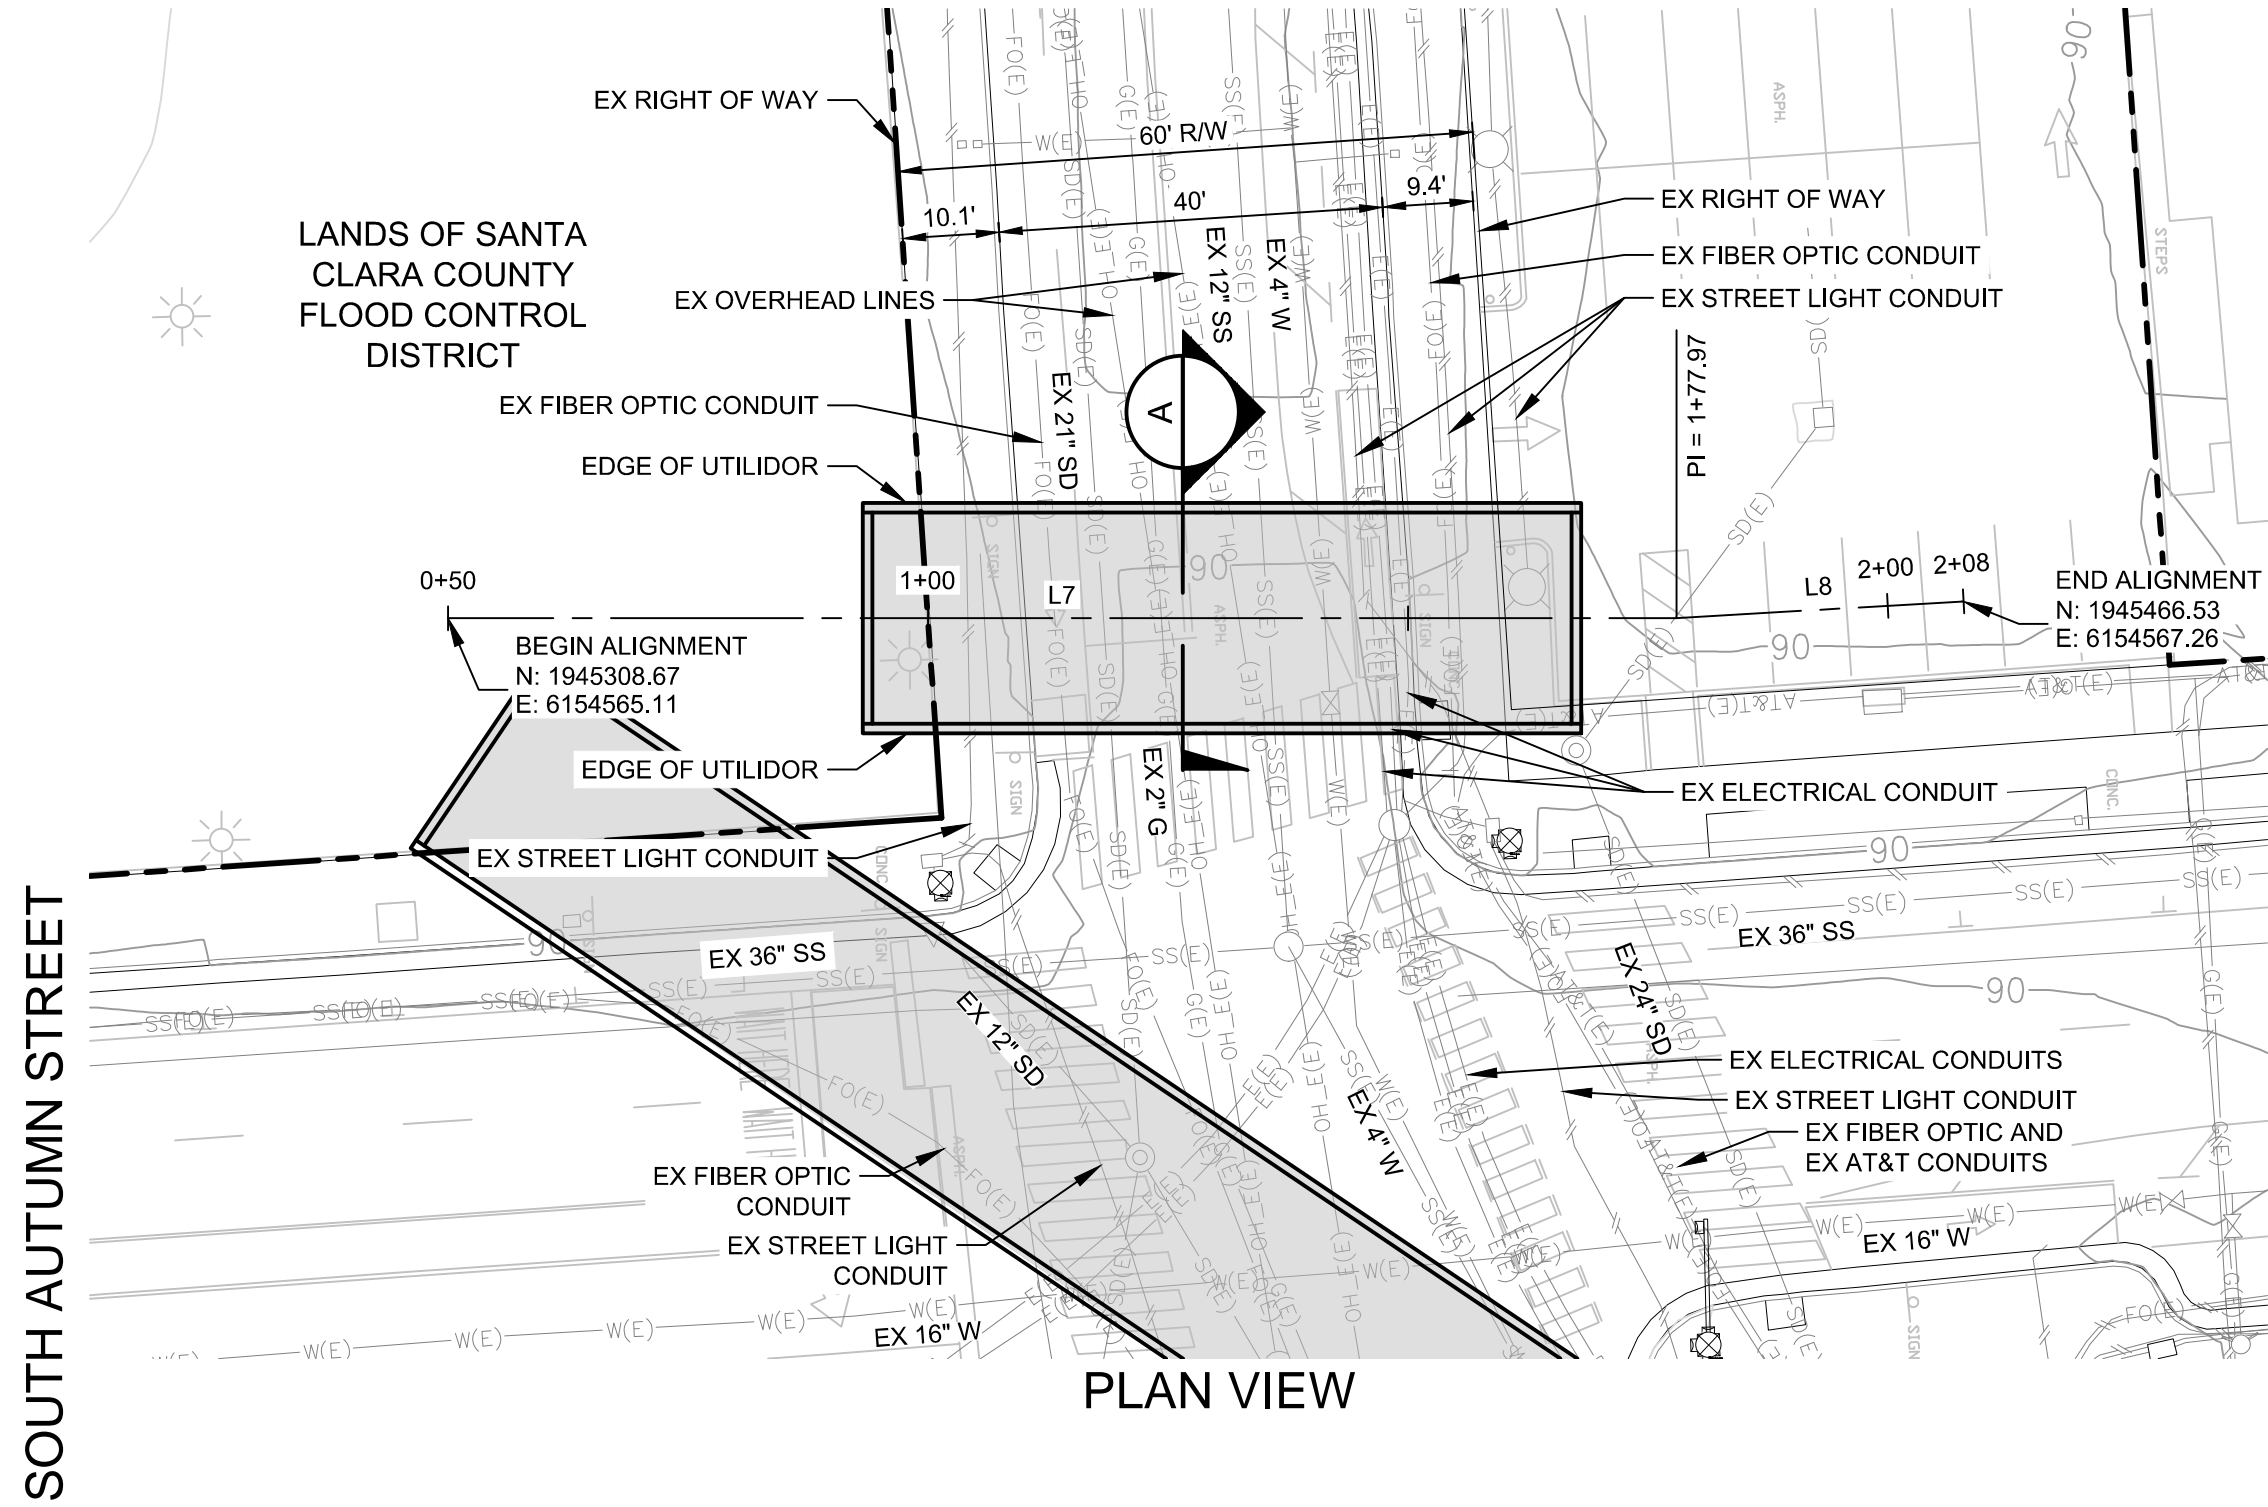



LINE TABLE		
LINE	LENGTH	BEARING
L7	127.97'	N1°24'49"E
L8	29.95'	N1°56'26"W

## NOTES

- PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

## CAUTION:

PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO  
CONSTRUCTION OF ANY IMPROVEMENTS.

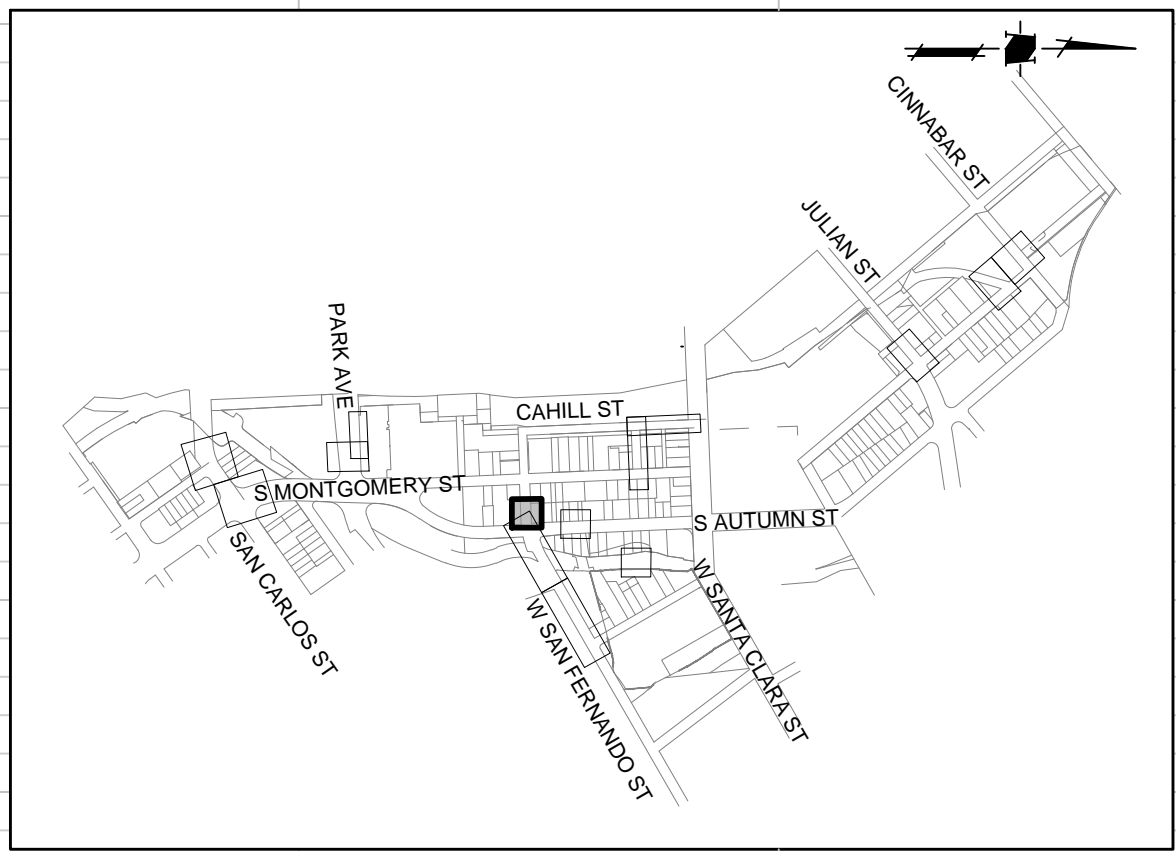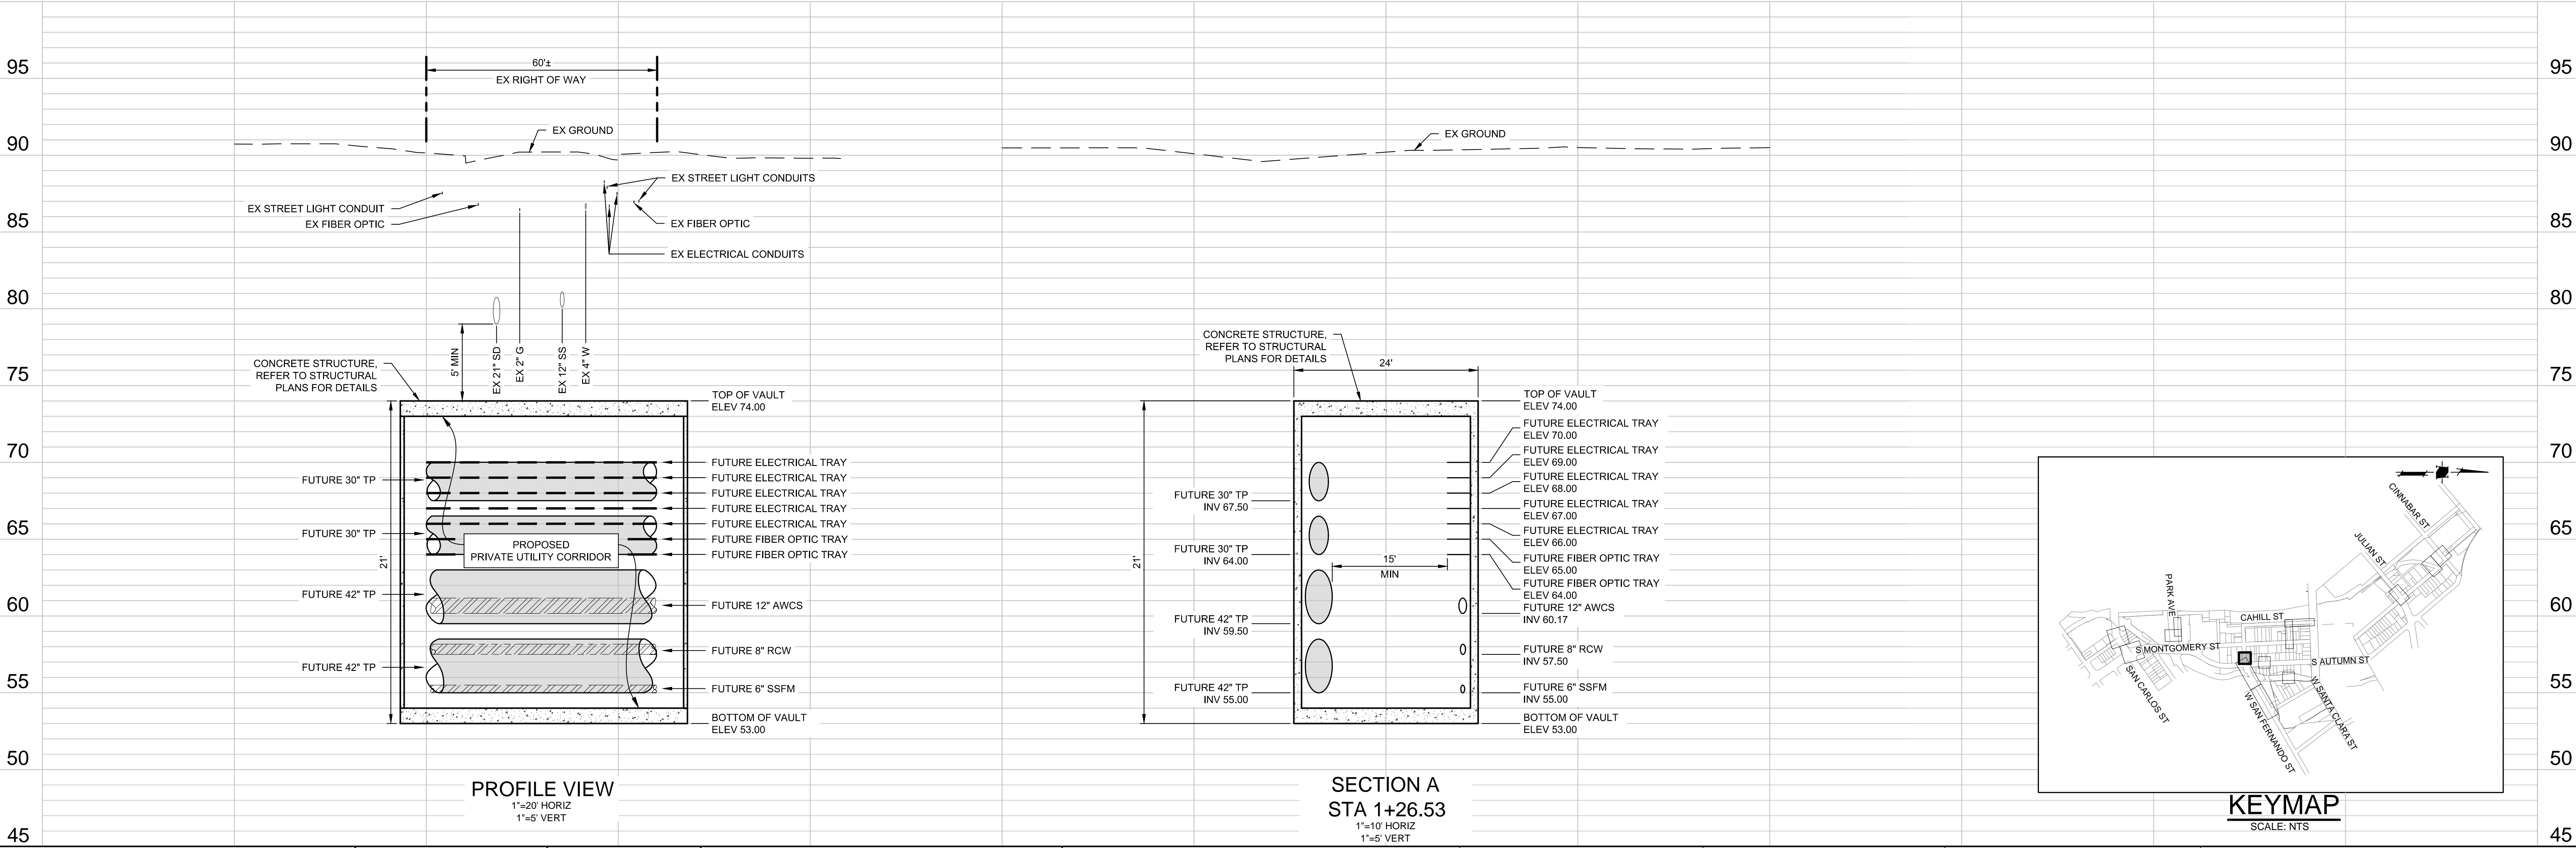

## KEYMAP

SCALE: NTS



DATE:	SEPTEMBER 8, 2020
SCALE:	AS SHOWN
DESIGNED:	RH
DRAWN:	LA/RM/JBC
CHECKED:	RH
PROJ. ENGR:	RH
FILE:	571900IP.DWG



**PRELIMINARY  
NOT FOR CONSTRUCTION**

PLAN  
FOR THE IMPROVEMENT OF THE  
**DOWNTOWN WEST UTILIDOR  
WEST SAN FERNANDO STREET**  
SAN JOSE CALIFORNIA

PERMIT #  
PROJECT #  
PROJECT INSPECTOR:  
VOICEMAIL:


PROJECT ENGINEER  
NAME  
DEPARTMENT OF TRANSPORTATION  
NAME  
MUNICIPAL WATER  
NAME

DEPARTMENT OF TRANSPORTATION - OPS  
NAME  
STREETLIGHT LAYOUT  
NAME  
ELECTRICAL CIRCUITS  
NAME

DEPARTMENT OF PUBLIC WORKS  
CITY OF  
**SAN JOSE**  
CAPITAL OF SILICON VALLEY  
APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS  
SHEET 8 OF 20

1ST SUBMITTAL


CONTRACTOR SHALL BE RESPONSIBLE FOR THE SAFETY OF ALL PERSONS ON THE PROJECT. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER HARMLESS FROM AND AGAINST ALL SUCH CLAIMS, DAMAGES AND LOSSES.

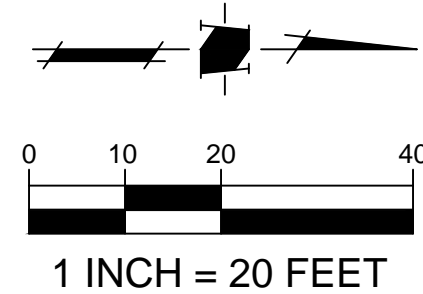


LINE TABLE		
LINE	LENGTH	BEARING
L9	39.92'	N9°58'23"W
L10	91.07'	N0°00'00"E
L11	52.67'	N1°09'56"W

1+00

2+00

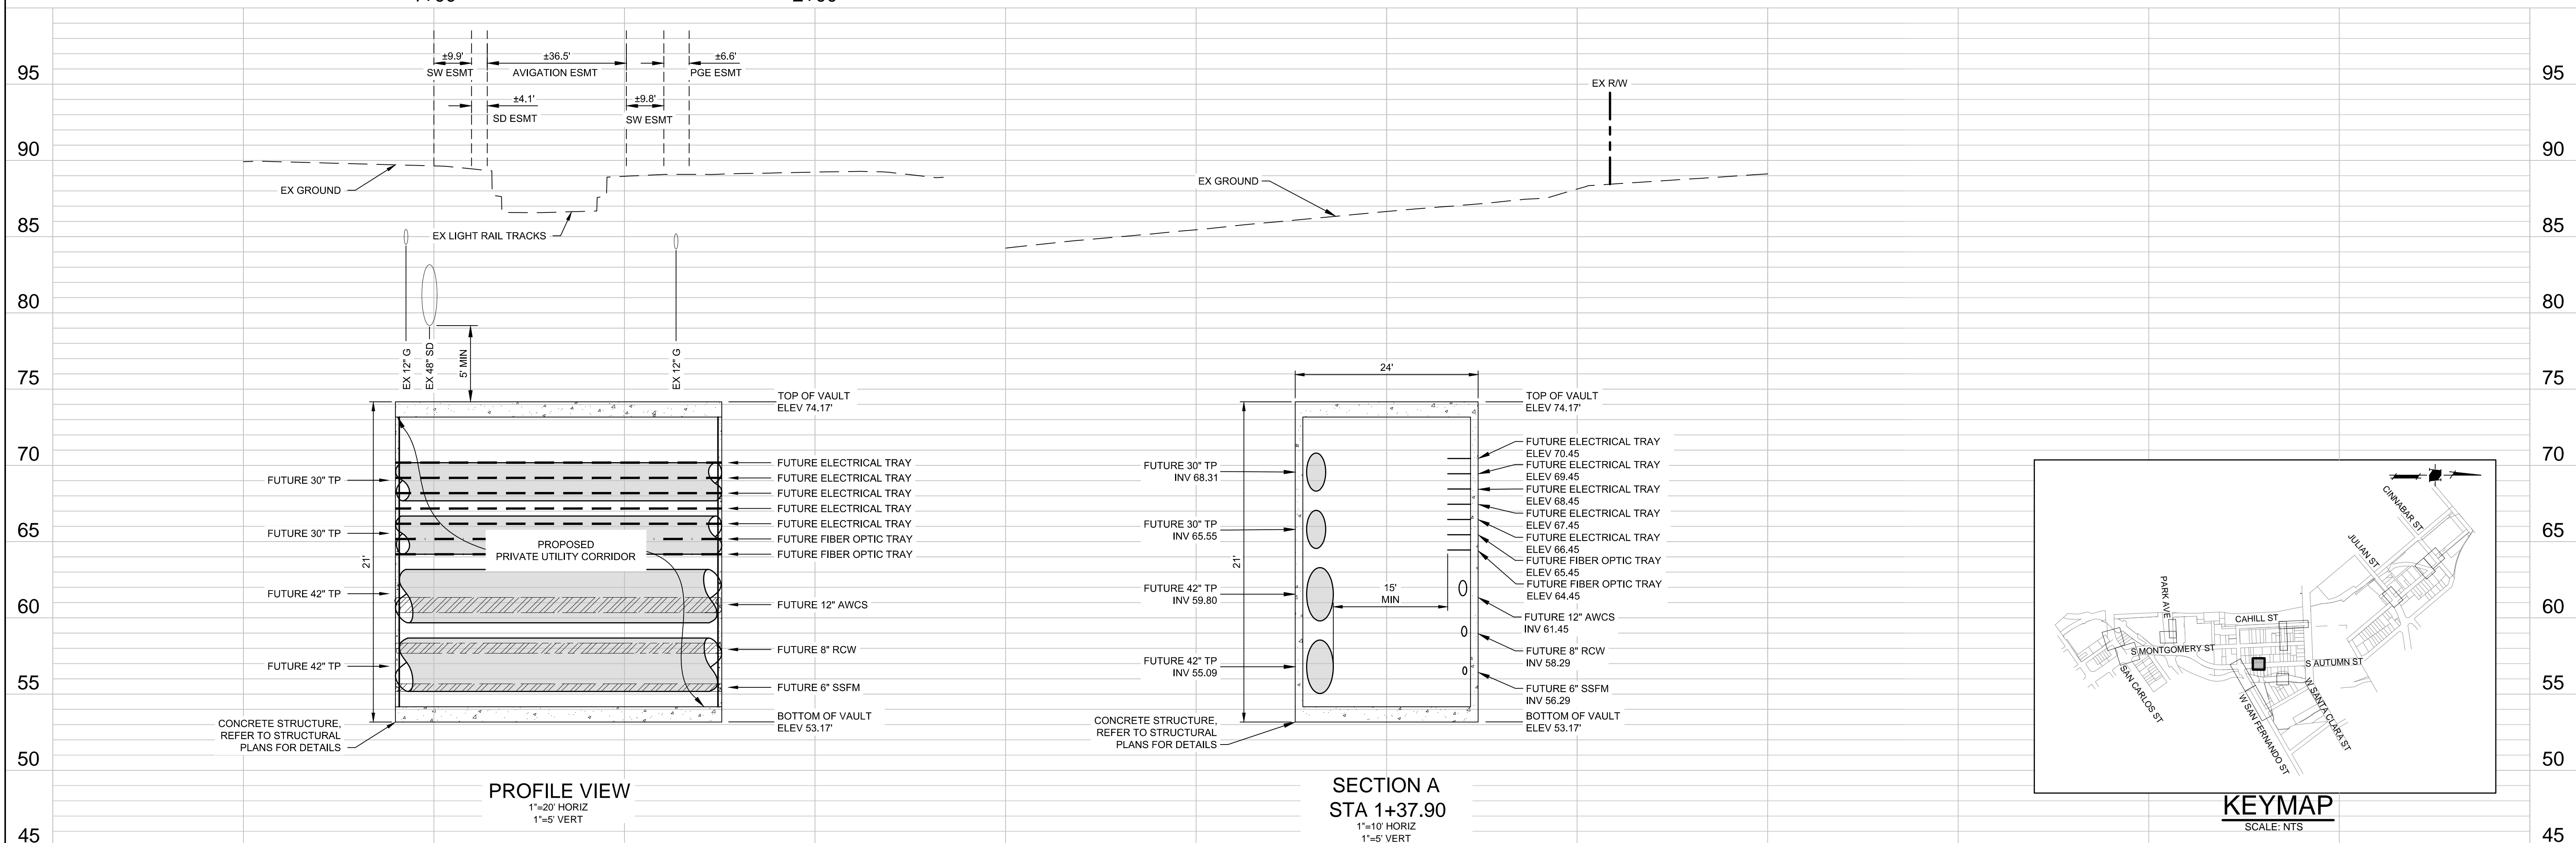

# KEYMAP

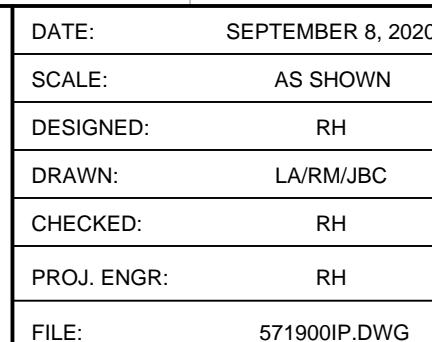

PRELIMINARY  
NOT FOR CONSTRUCTION

# PLAN FOR THE IMPROVEMENT OF THE DOWNTOWN WEST UTILIDOR VTA LIGHT RAIL CROSSING

SAN JOSE

CALIFORNIA

PERMIT #	
PROJECT #	

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER
------------------

	NAME
	DEPARTMENT OF TRANSPORTATION

NAME \_\_\_\_\_

NAME \_\_\_\_\_

DEPARTMENT OF TRANSPORTATION - OPS

	NAME
	STREETLIGHT LAYOUT

NAME \_\_\_\_\_

NAME \_\_\_\_\_

DEPARTMENT OF PUBLIC WORKS




APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS


SHEET 9 OF 20

1ST SUBMITTAL

S:\PROJECTS\571900\LD\ENCROACHMENT PERMIT\PLOT DRAWINGS\571900\IP03 PLAN PROFILE-UTLIDOR 02.DWG; 9/3/2020 4:18 PM

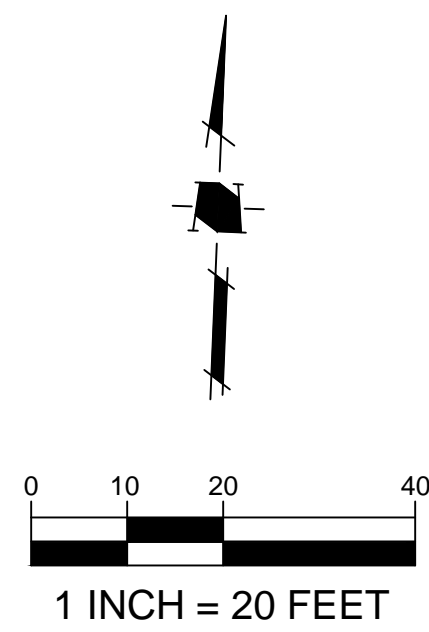

LINE TABLE		
LINE	LENGTH	BEARING
L12	406.99'	N87°38'05"E


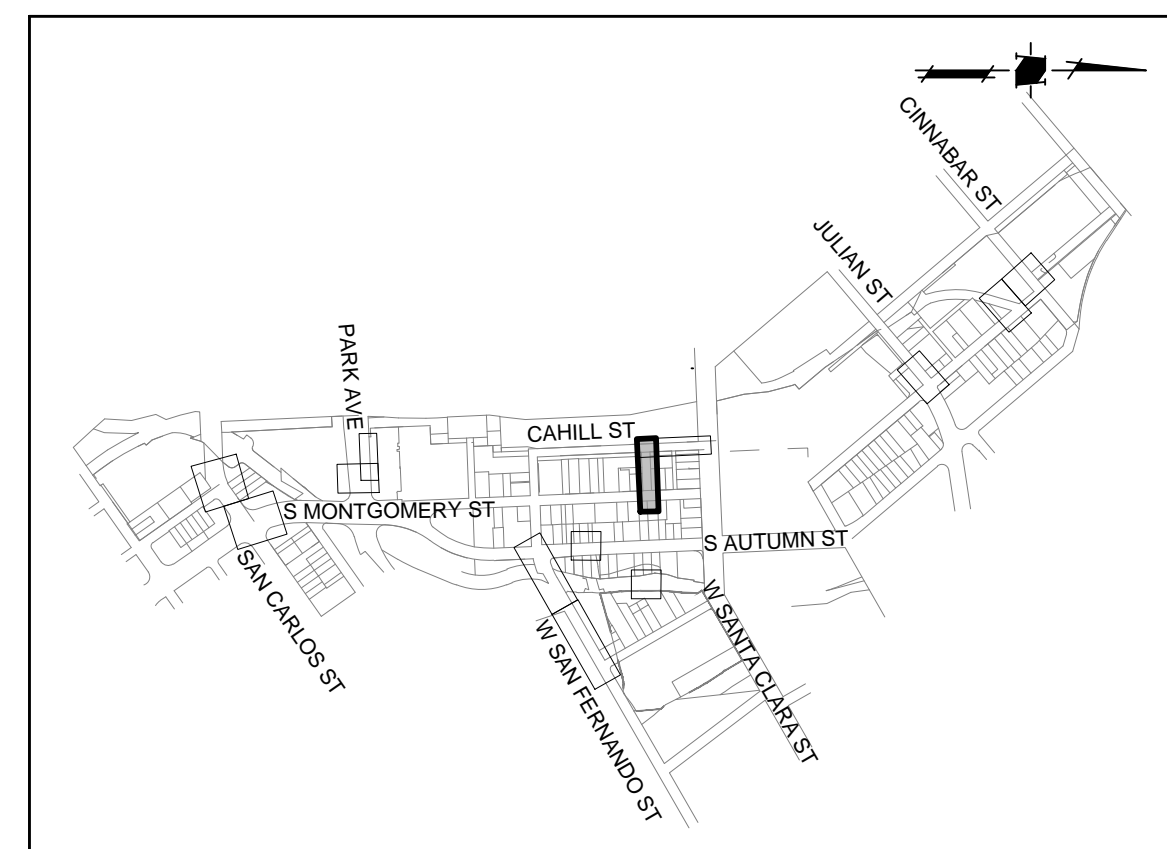


# KEYMAP

SCALE: NTS

1. PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO  
CONSTRUCTION OF ANY IMPROVEMENTS.

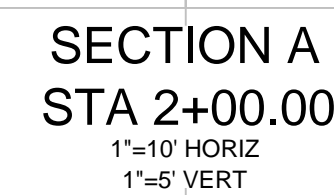

PLAN  
FOR THE IMPROVEMENT OF THE  
**DOWNTOWN WEST UTILIDOR**  
**CRANDALL STREET**

CALIFORNIA

PROJECT  
INSPECTOR  
VOICEMAIL:

NAME
DEPARTMENT OF TRANSPORTATION
NAME
MUNICIPAL WATER
NAME


NAME	DATE
STREETLIGHT LAYOUT	
NAME	DATE
ELECTRICAL CIRCUITS	
NAME	DATE

CITY OF  
**SAN JOSE**  
CAPITAL OF SILICON VALLEY

SHEET 10 OF 20



CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY. THAT THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS, AND THAT THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

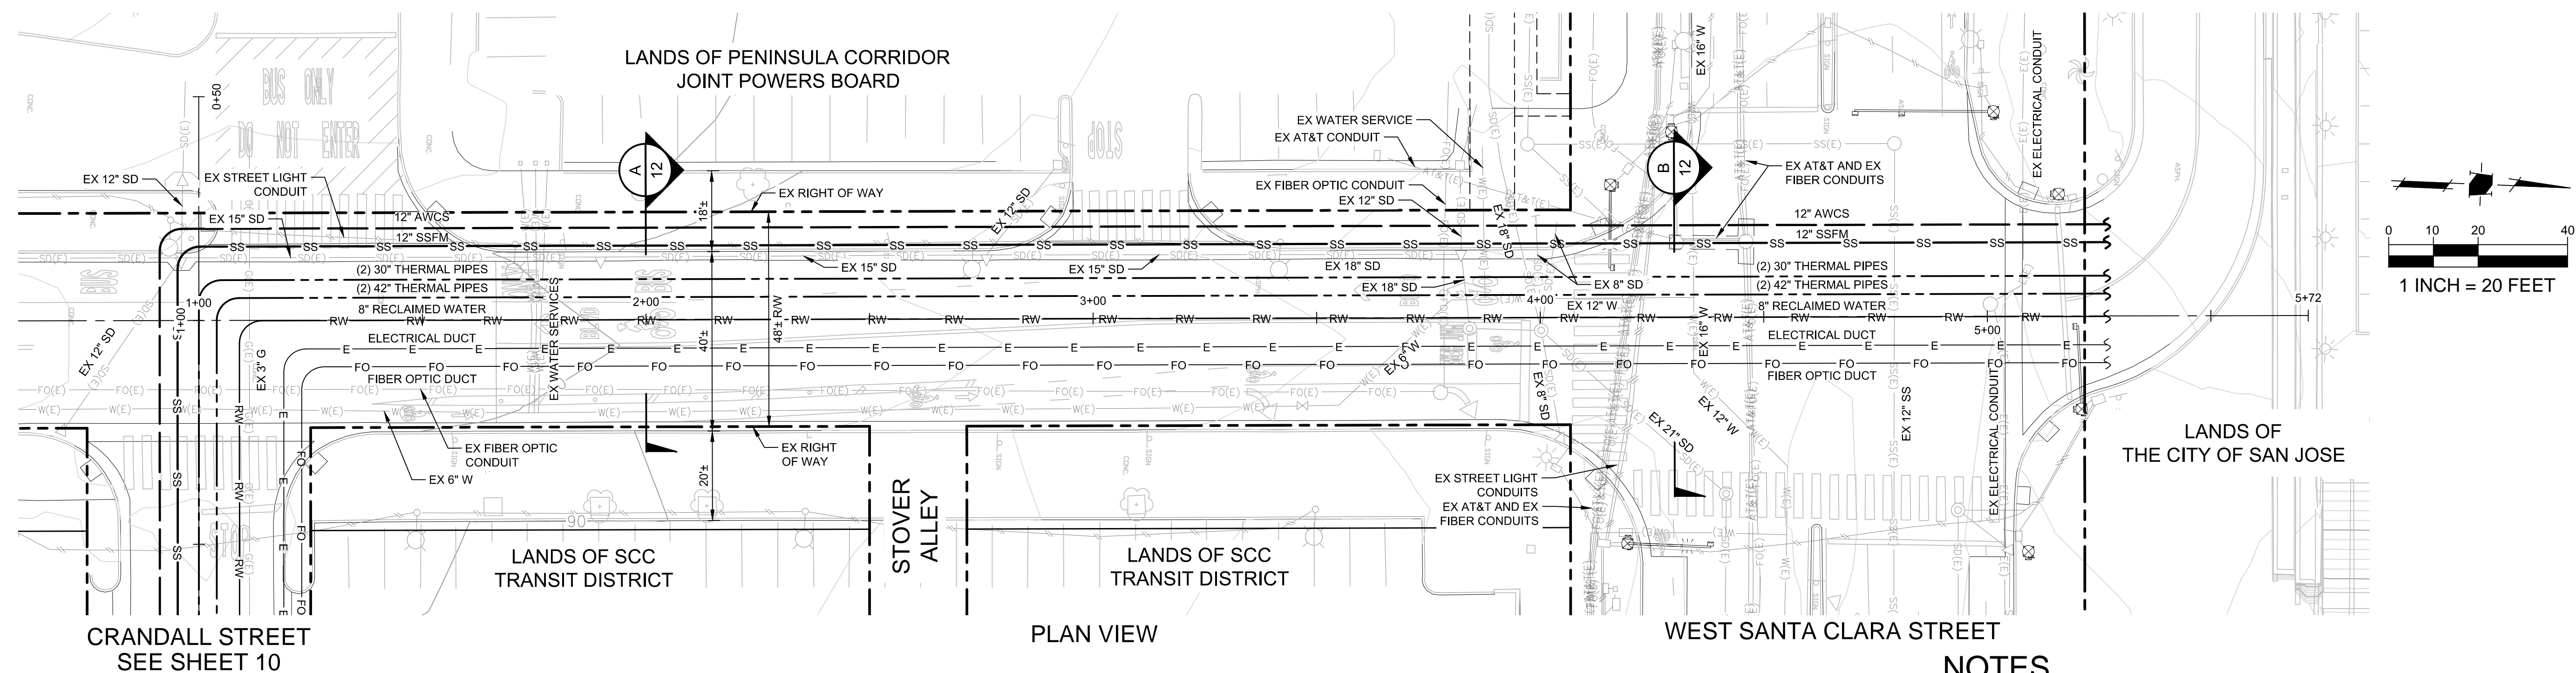


## NOTES

1. PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

**CAUTION:**

PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO  
CONSTRUCTION OF ANY IMPROVEMENTS.

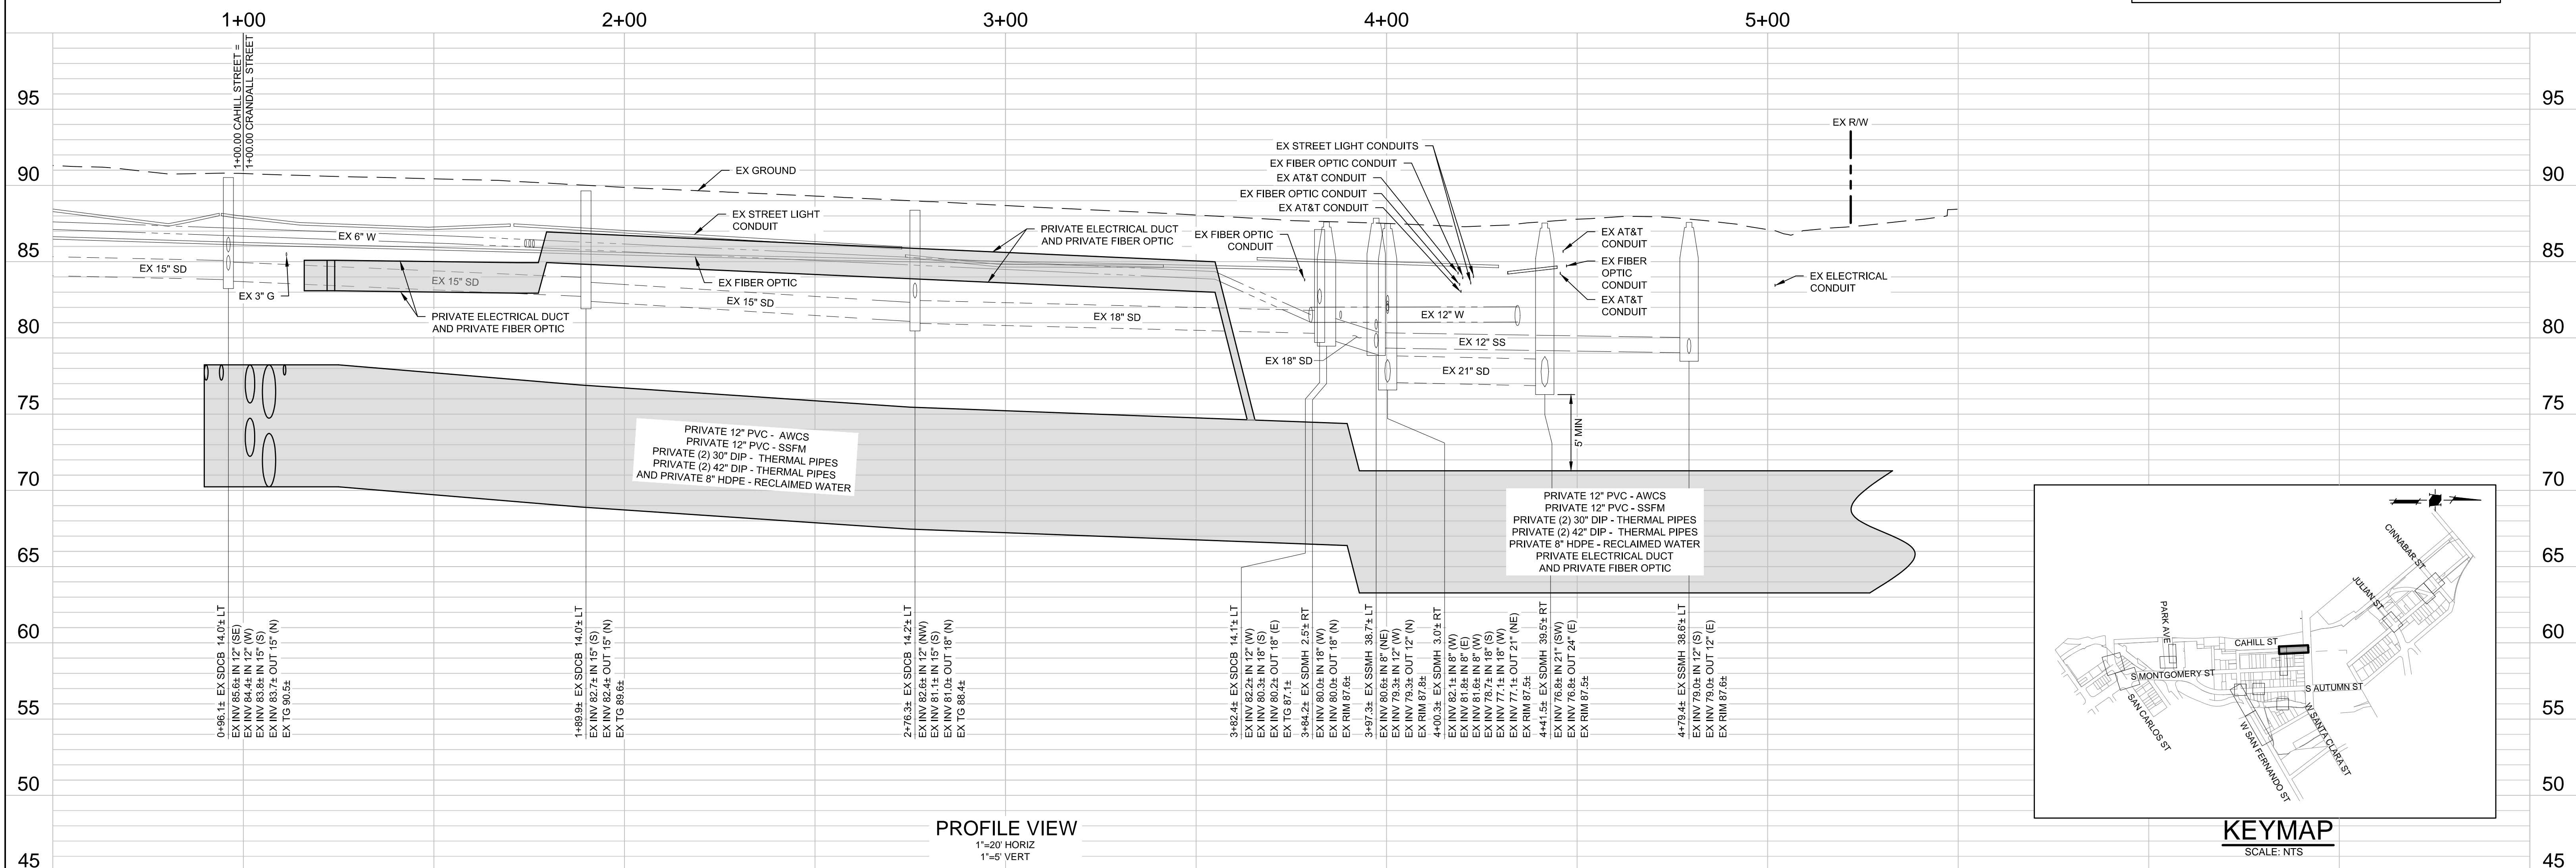

# KEYMAP

SCALE: NTS



DATE:	SEPTEMBER 8, 2020
SCALE:	H: 1" = 20'; V: 1" = 5'
DESIGNED:	RH
DRAWN:	LA/RM/JBC
CHECKED:	RH
PROJ. ENGR:	RH
FILE:	571900IP.DWG



PRELIMINARY  
NOT FOR CONSTRUCTION

# PLAN FOR THE IMPROVEMENT OF THE DOWNTOWN WEST UTILIDOR CAHILL STREET

PERMIT #	
PROJECT #	

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER
------------------

NAME
DEPARTMENT OF TRANSPORTATION
NAME
MUNICIPAL WATER
NAME

DEPARTMENT OF TRANSPORTATION - OPS

NAME	DATE
STREETLIGHT LAYOUT	
NAME	DATE
ELECTRICAL CIRCUITS	
NAME	DATE

DEPARTMENT OF PUBLIC WORKS




APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 11 OF 20

CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR ALL SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF PERSONS AND PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR THE PROTECTION OF ALL EXISTING UTILITIES. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

S:\PROJECTS\571900\DESIGN\COACHMENT PERMITS\CT DRAWINGS\571900\PP4 PLAN PROFILE-UTILIDOR 03.DWG, 9/3/2020 3:32 PM

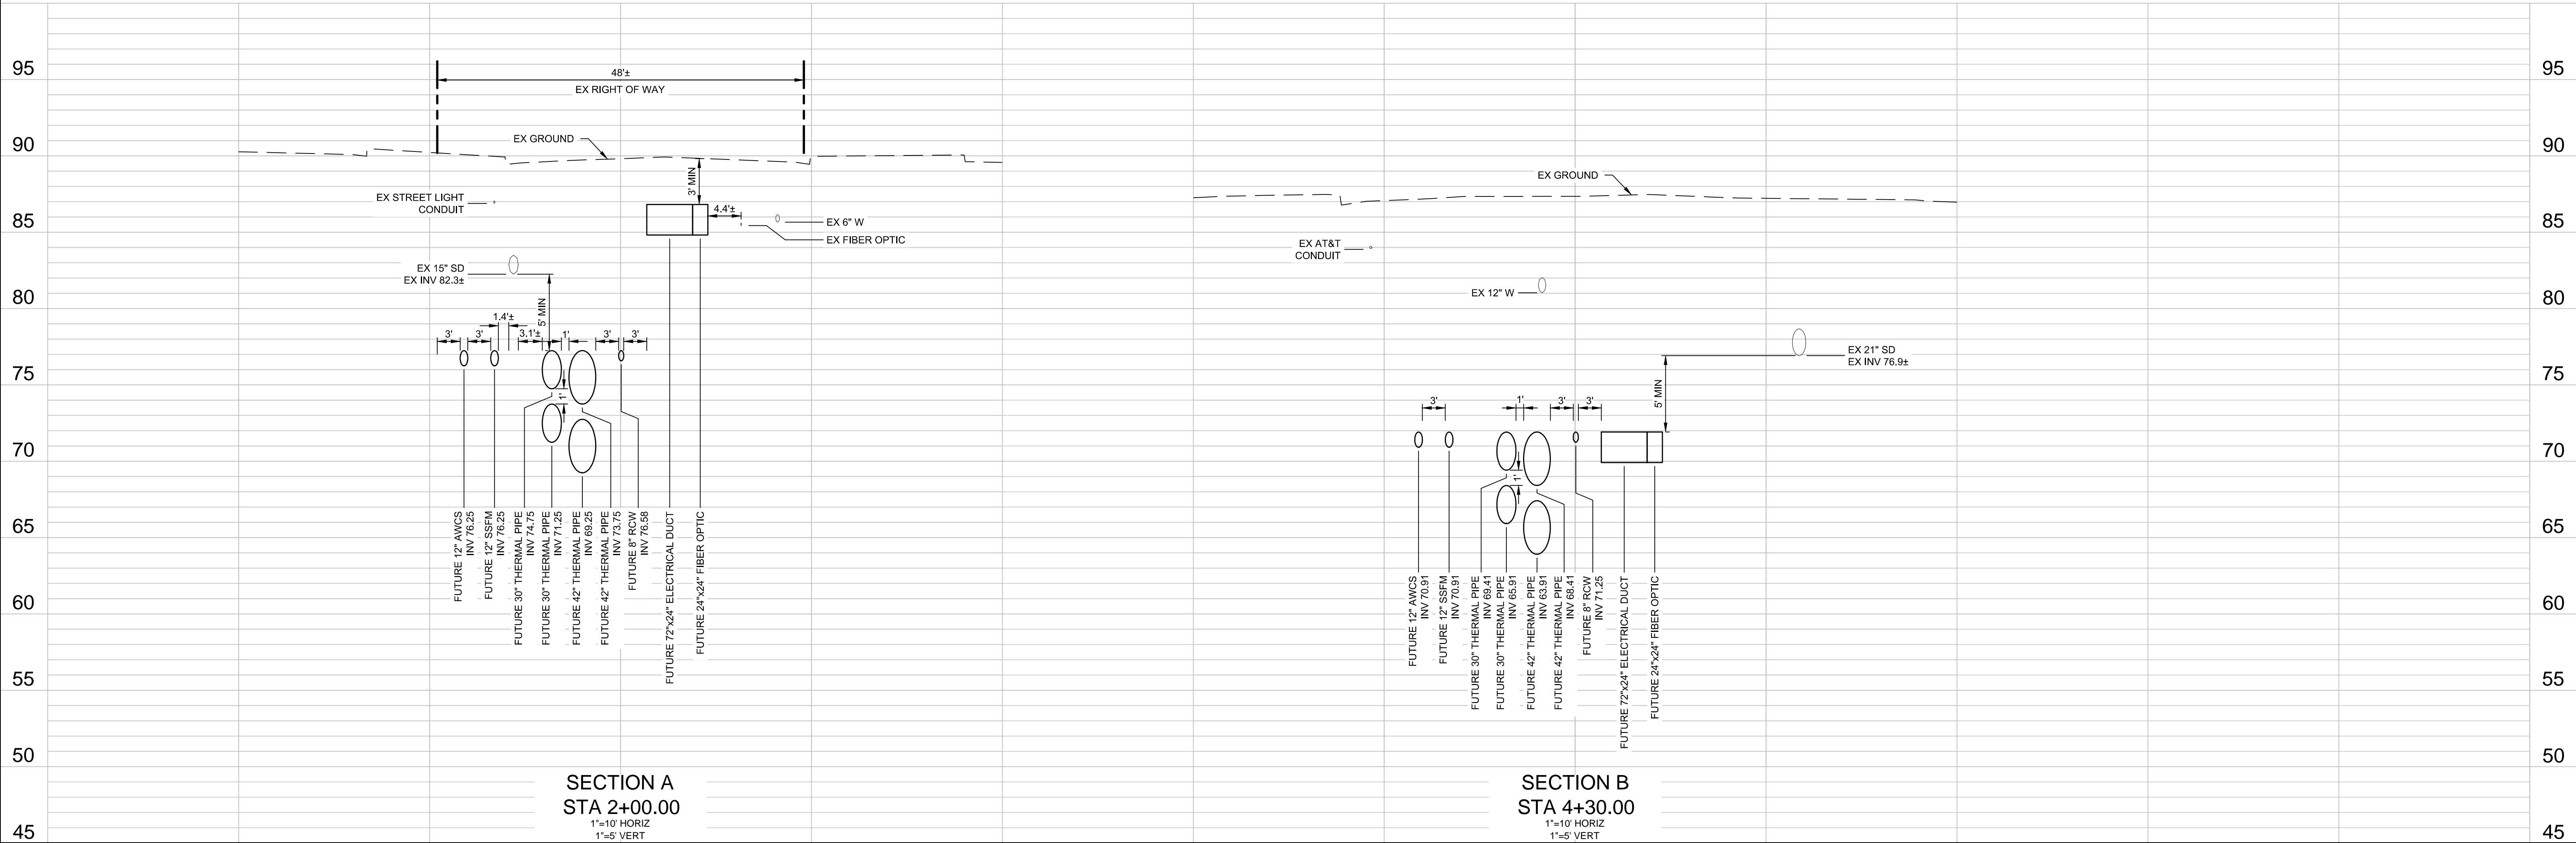

## NOTES

- PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

### CAUTION:

PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO  
CONSTRUCTION OF ANY IMPROVEMENTS.



1570 Oakland Road  
San Jose, CA 95131  
(408) 487-2200  
HMHca.com

DATE:	SEPTEMBER 8, 2020
SCALE:	H: 1"=5' SHOWN = 5'
DESIGNED:	RH
DRAWN:	LA/RM/JBC
CHECKED:	RH
PROJ. ENGR:	RH
FILE:	571900IP.DWG



PRELIMINARY  
NOT FOR CONSTRUCTION

PLAN  
FOR THE IMPROVEMENT OF THE  
DOWNTOWN WEST UTILIDOR  
CAHILL STREET SECTIONS

SAN JOSE

CALIFORNIA

PERMIT #  
PROJECT #

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER

NAME DATE

DEPARTMENT OF TRANSPORTATION

NAME DATE

MUNICIPAL WATER

NAME DATE

DEPARTMENT OF TRANSPORTATION - OPS

NAME DATE

STREETLIGHT LAYOUT

NAME DATE

ELECTRICAL CIRCUITS

NAME DATE

DEPARTMENT OF PUBLIC WORKS




APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 12 OF 20

1ST SUBMITTAL

CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR ALL SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF PERSONS AND PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR THE PROTECTION OF ALL EXISTING UTILITIES AND STRUCTURES. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

S:\PROJECTS\571900L\DWG\CONTRACT\PERMITS\CT DRAWINGS\571900P04-PLAN PROFILE-UTILIDOR 03.DWG, 9/3/2020 3:35 PM

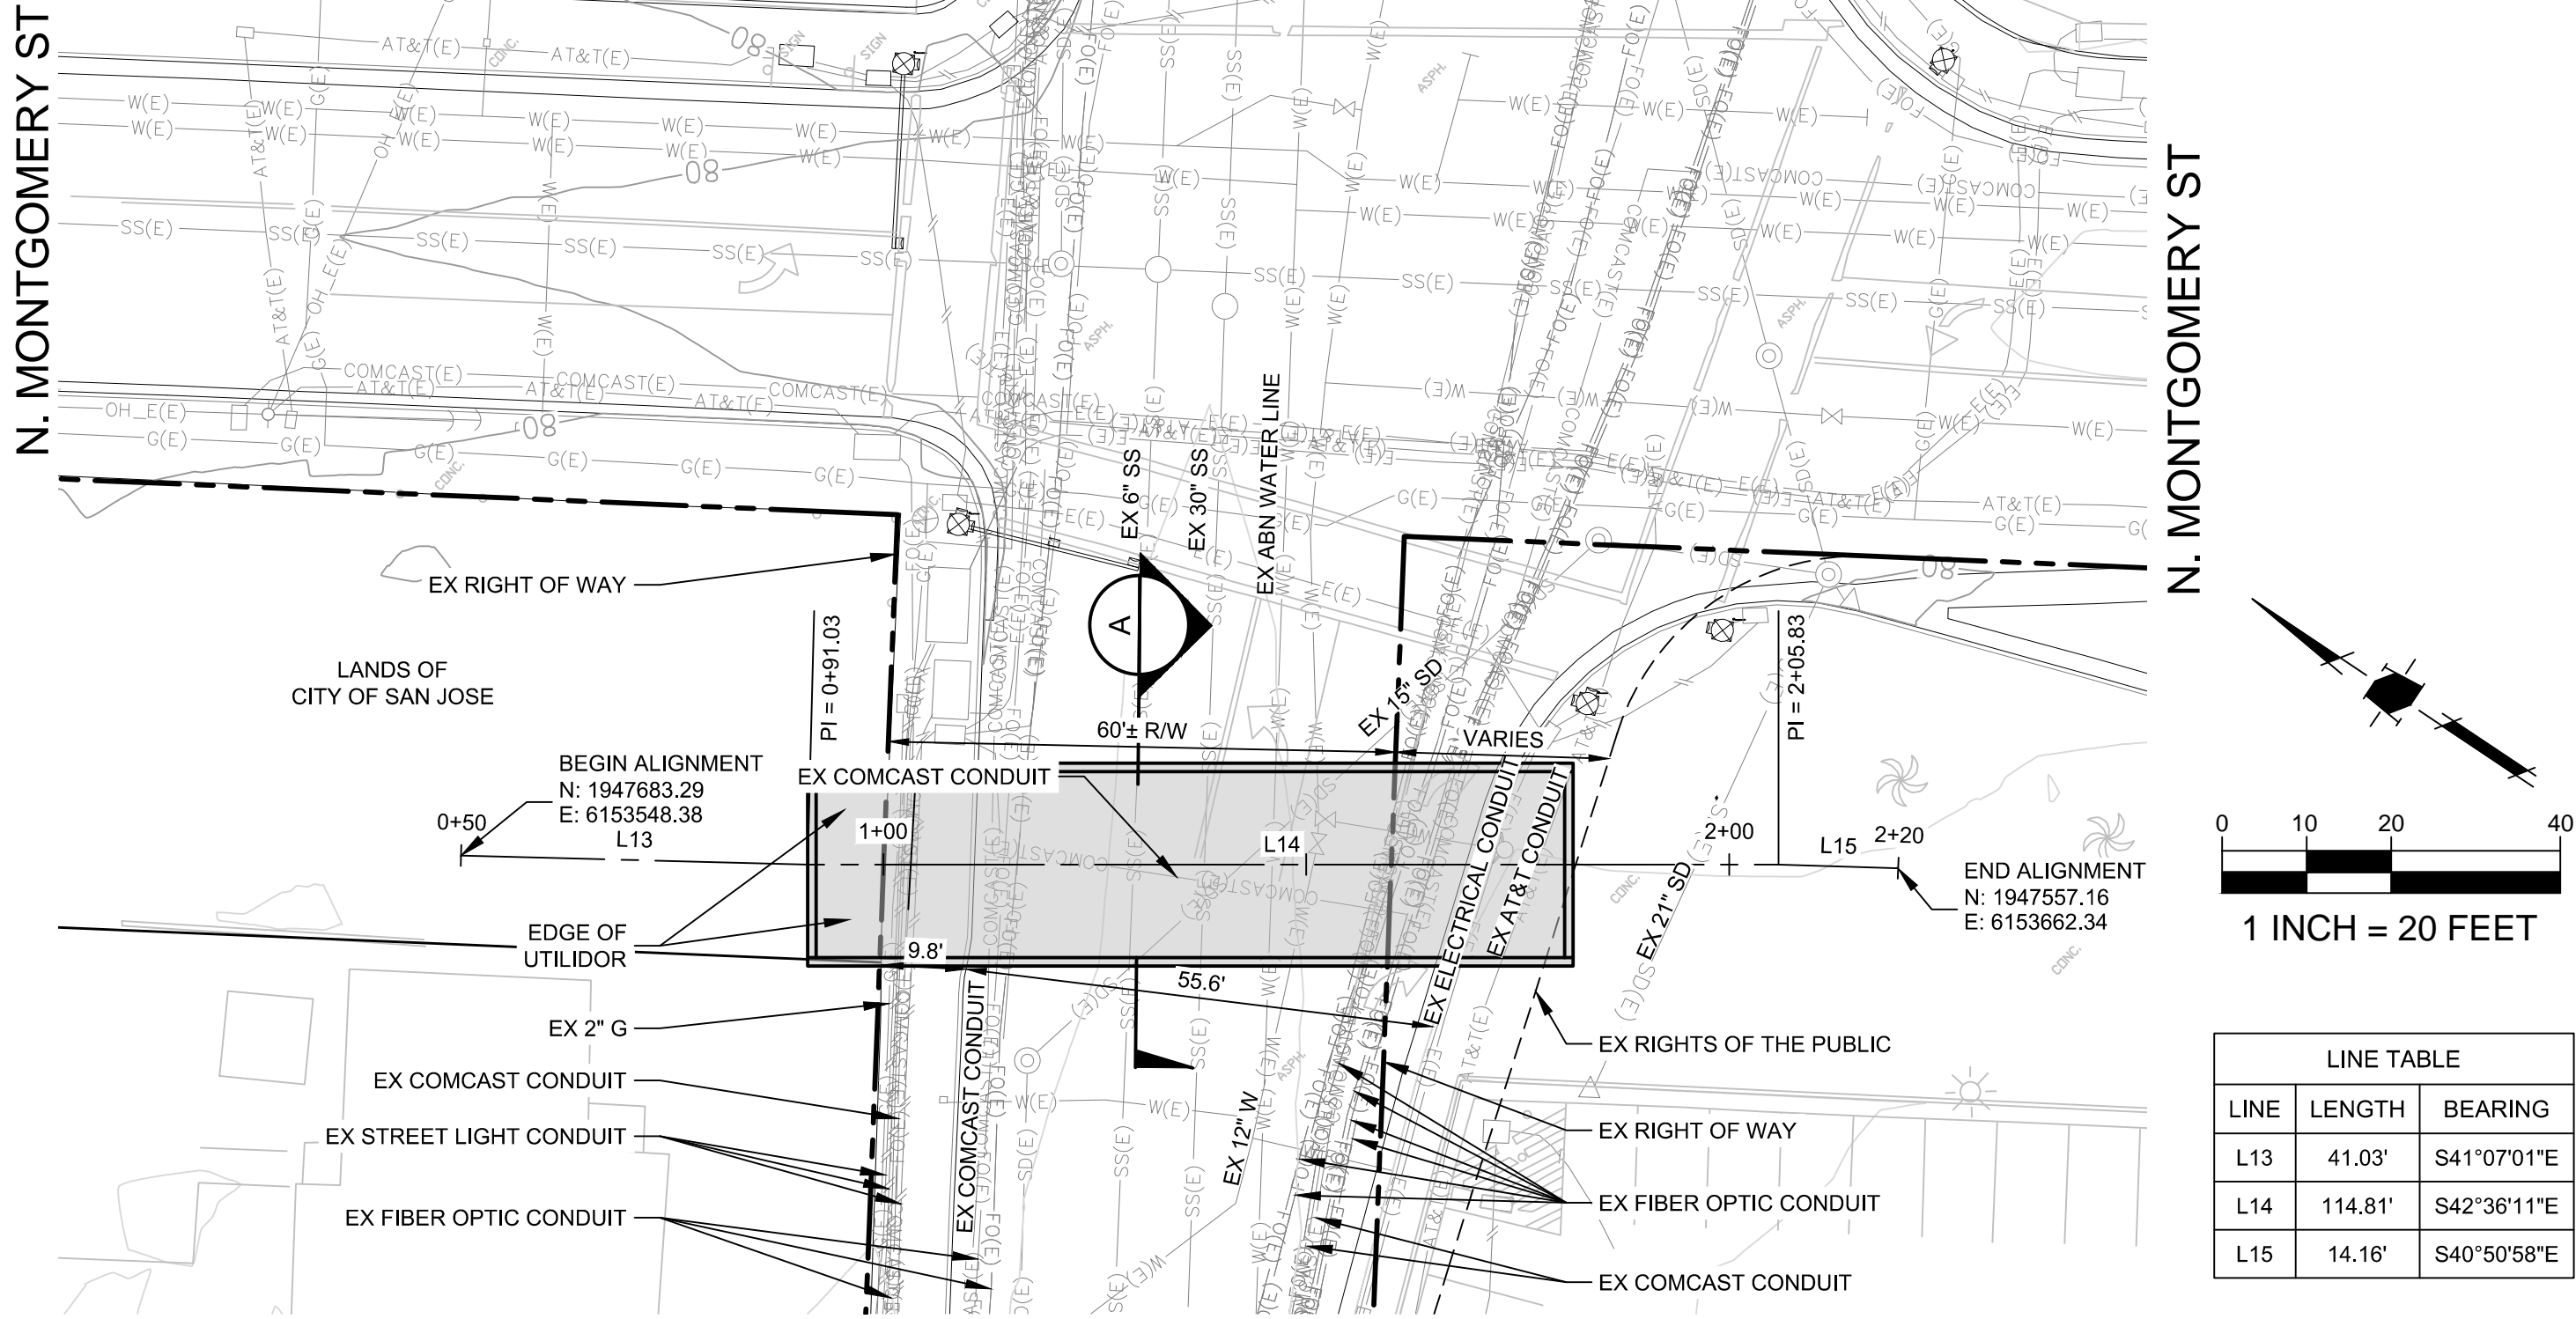

PLAN VIEW

WEST JULIAN STREET

1+00

2+00


LINE TABLE		
LINE	LENGTH	BEARING
L13	41.03'	S41°07'01\"E
L14	114.81'	S42°36'11\"E
L15	14.16'	S40°50'58\"E

NOTES

- PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.


CAUTION:

PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES. CONTRACTOR TO VERIFY LOCATION PRIOR TO CONSTRUCTION OF ANY IMPROVEMENTS.

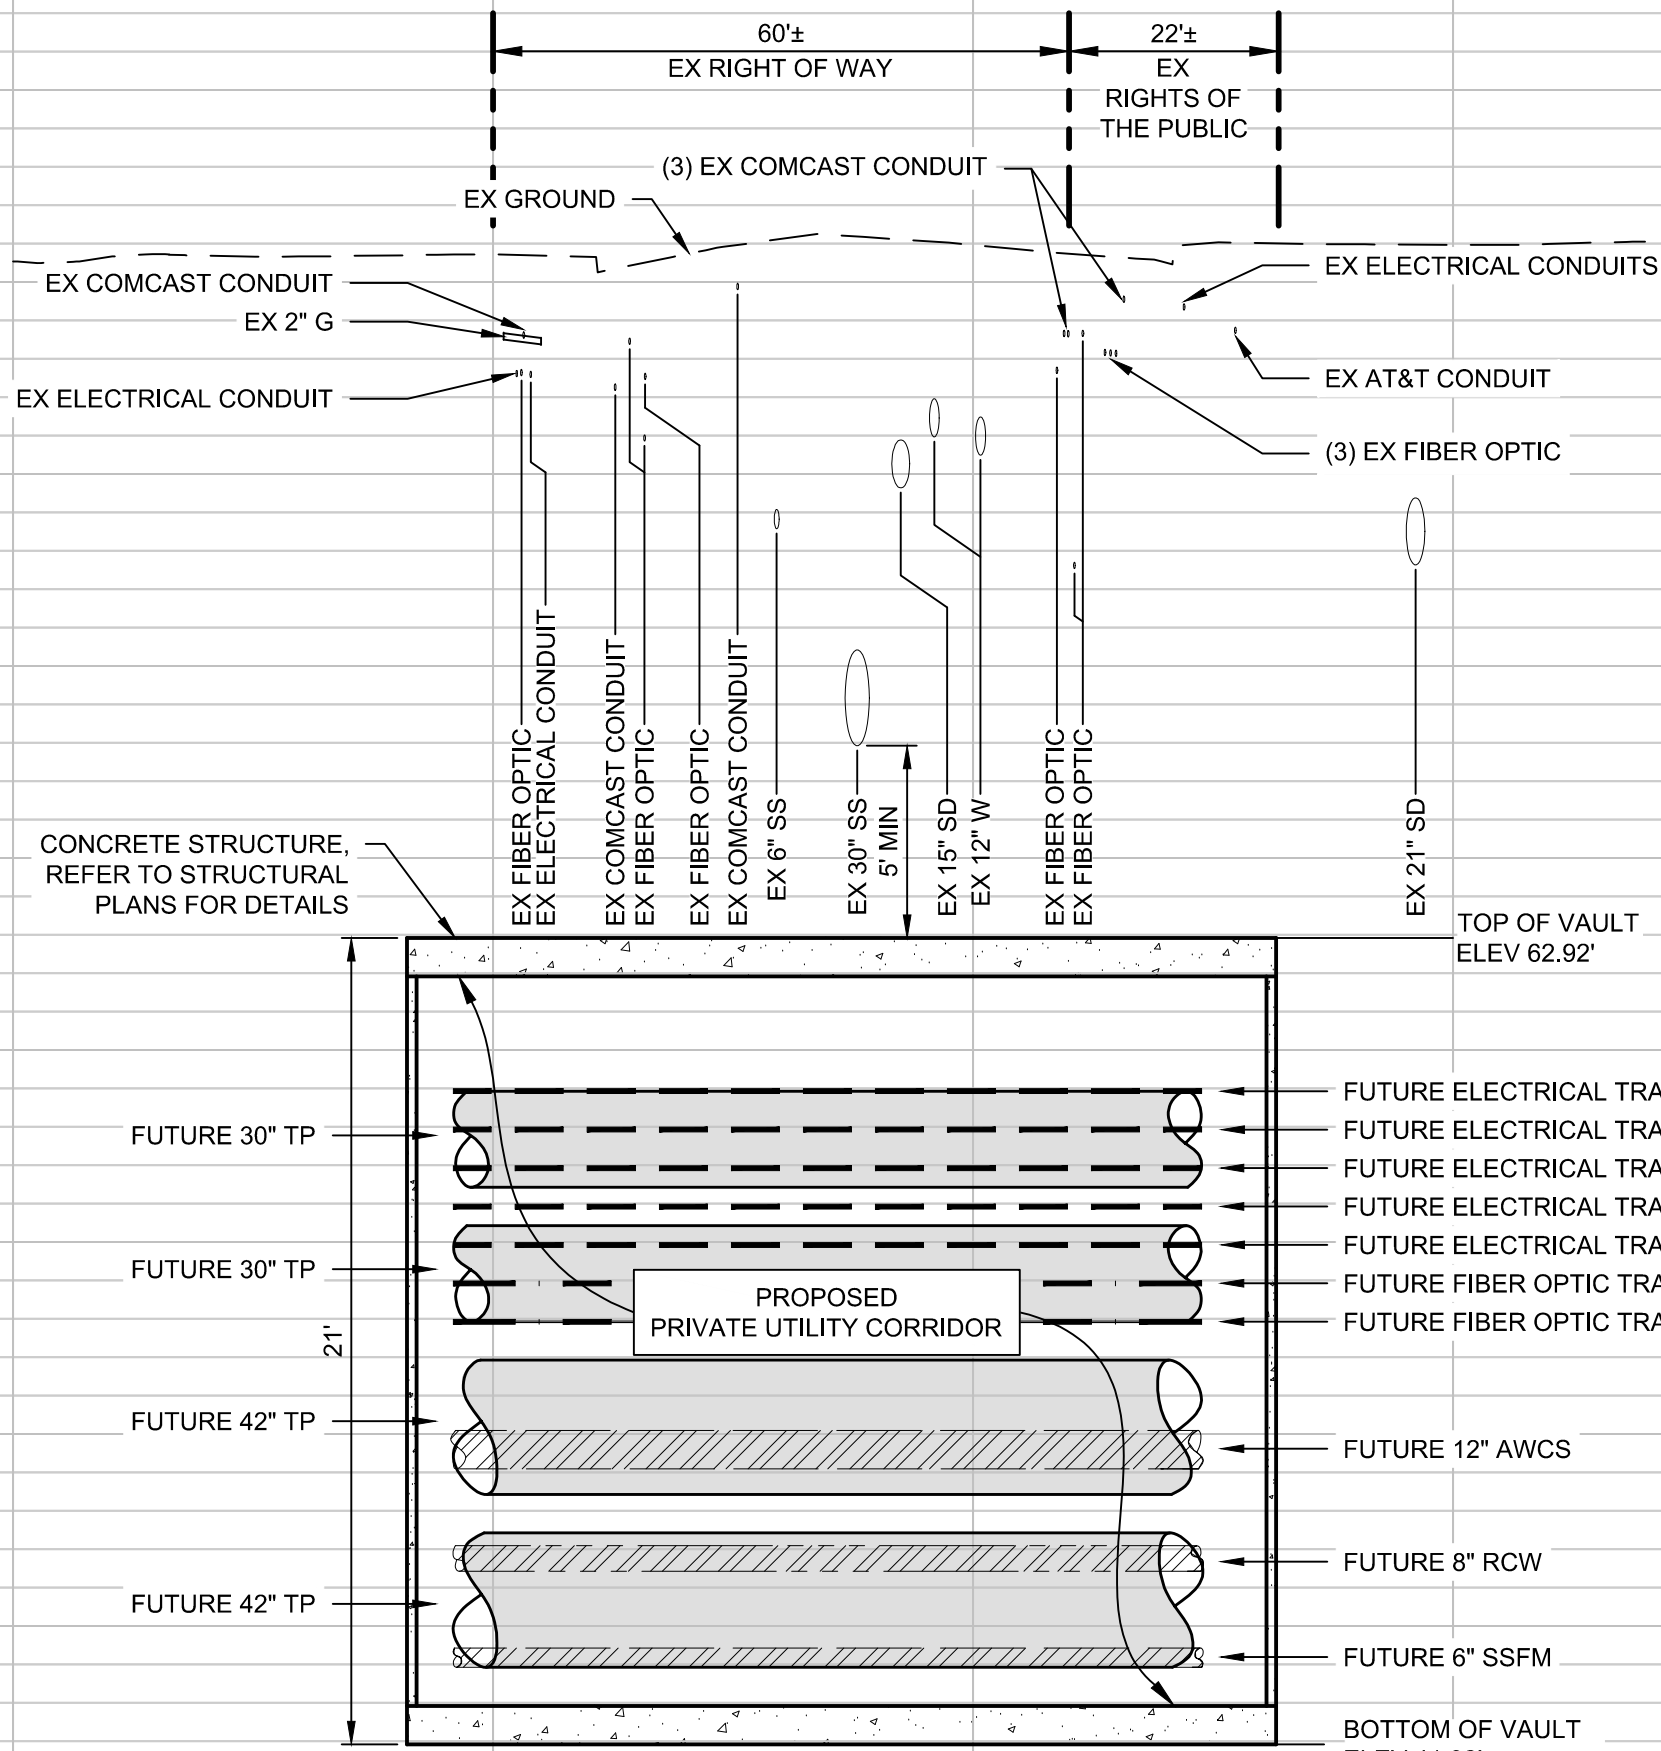

PROFILE VIEW


1\"=20' HORIZ  
1\"=5' VERT

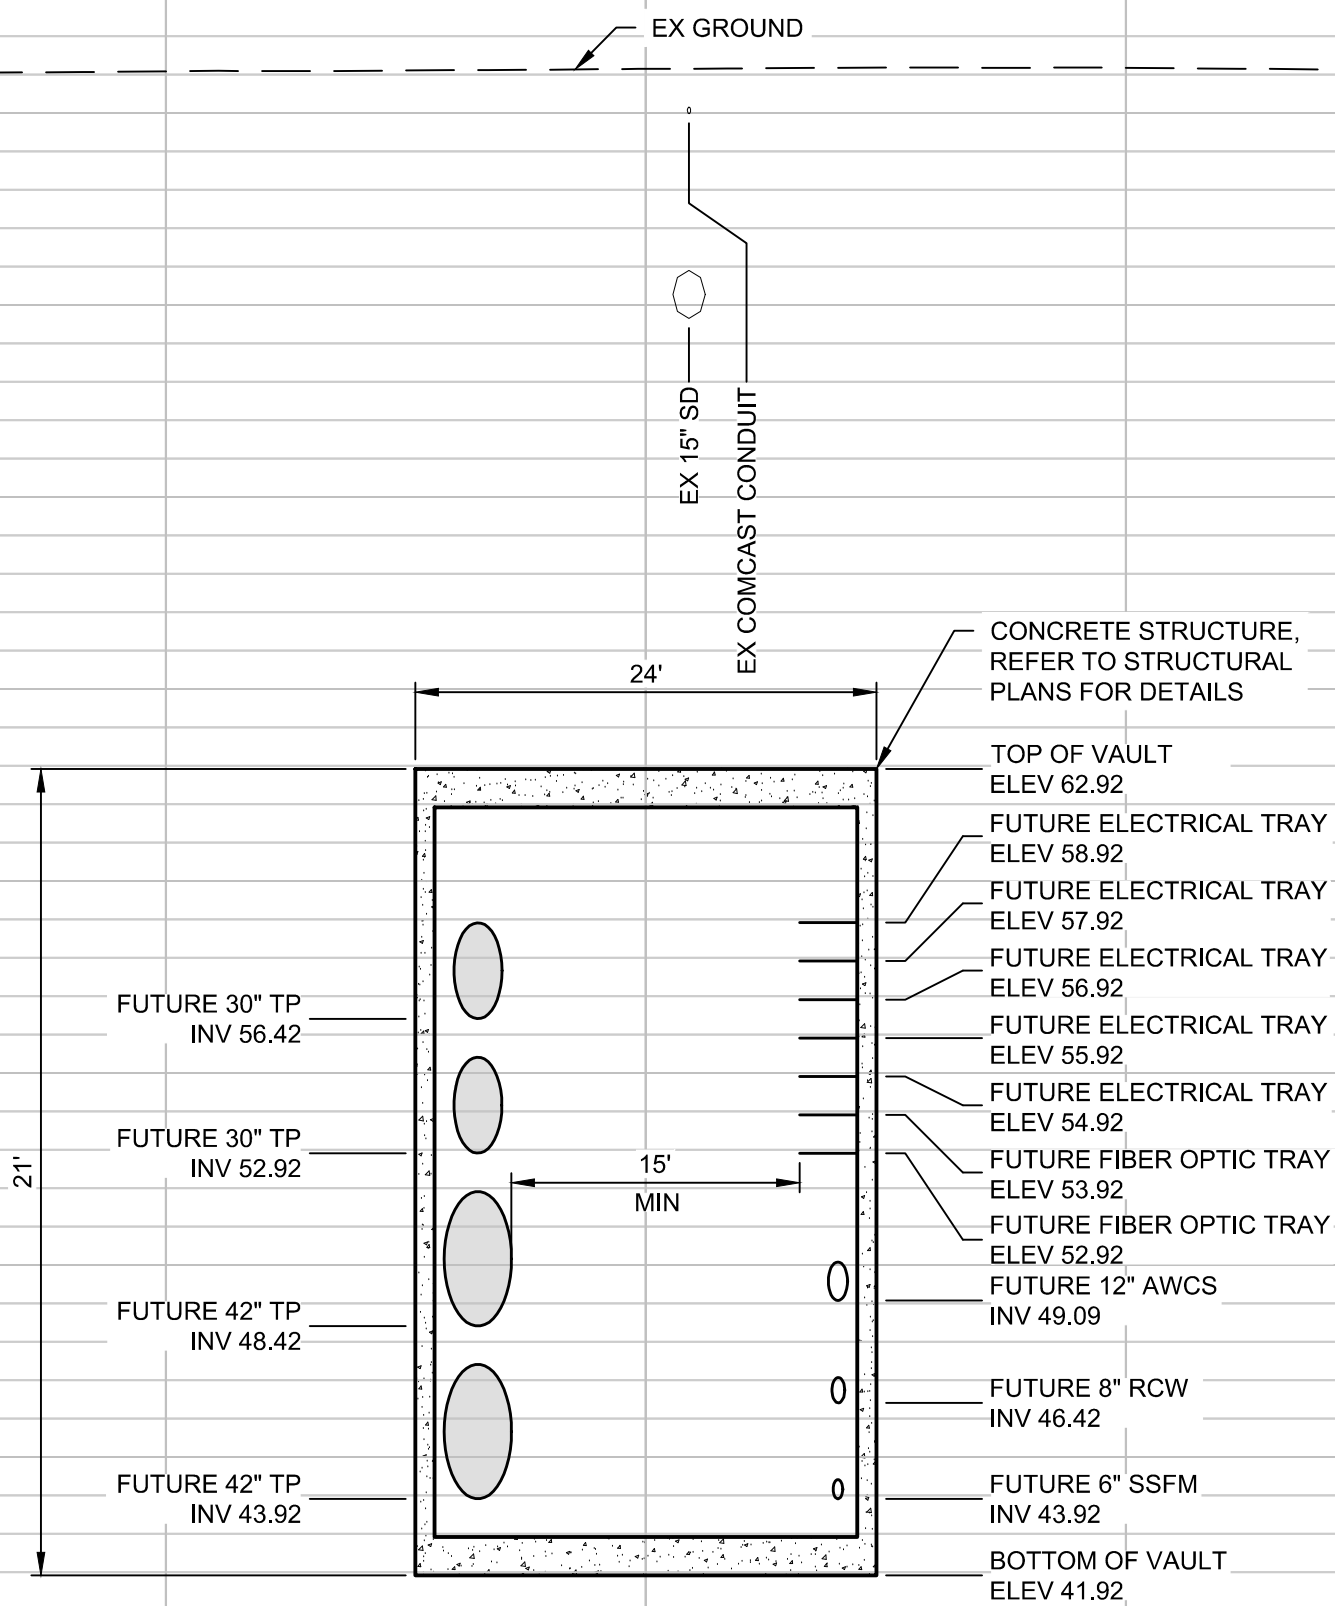

SECTION A

STA 1+40.00

1\"=10' HORIZ  
1\"=5' VERT

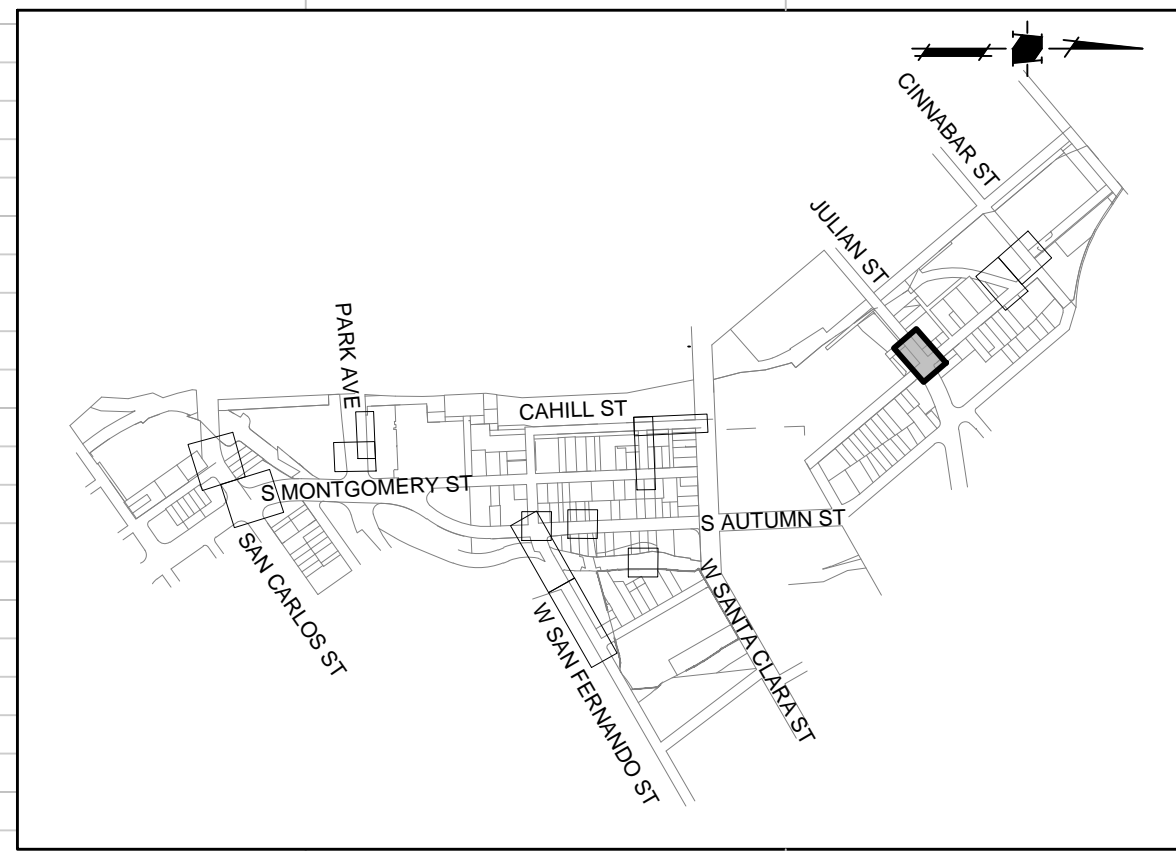

KEYMAP

SCALE: NTS



1570 Oakland Road  
San Jose, CA 95131

(408) 487-2200  
HMHca.com

DATE: SEPTEMBER 8, 2020  
SCALE: AS SHOWN  
DESIGNED: RH  
DRAWN: LA/RM/JBC  
CHECKED: RH  
PROJ. ENGR: RH  
FILE: 571900IP.DWG



PRELIMINARY  
NOT FOR CONSTRUCTION

PLAN  
FOR THE IMPROVEMENT OF THE  
DOWNTOWN WEST UTILIDOR  
WEST JULIAN STREET

SAN JOSE

CALIFORNIA

PERMIT #  
PROJECT #

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER

NAME DATE  
DEPARTMENT OF TRANSPORTATION

NAME DATE  
MUNICIPAL WATER

NAME DATE

DEPARTMENT OF TRANSPORTATION - OPS

NAME DATE  
STREETLIGHT LAYOUT

NAME DATE  
ELECTRICAL CIRCUITS

NAME DATE

DEPARTMENT OF PUBLIC WORKS




APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 13 OF 20


1ST SUBMITTAL



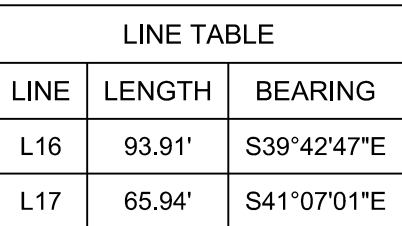

1. PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

**CAUTION:**  
PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO  
CONSTRUCTION OF ANY IMPROVEMENTS.

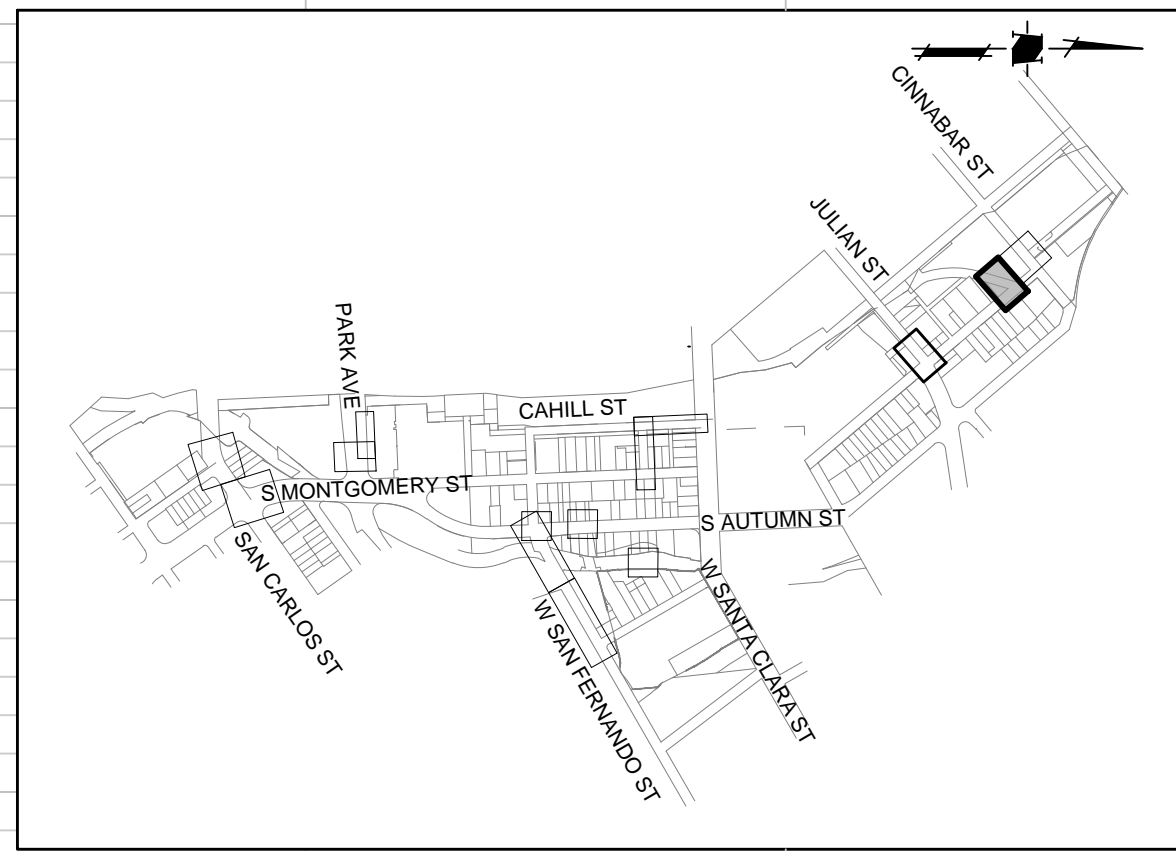

# KEYMAP

SCALE: NTS



PRELIMINARY  
NOT FOR CONSTRUCTION

# PLAN FOR THE IMPROVEMENT OF THE DOWNTOWN WEST UTILIDOR RAILROAD CROSSING

PERMIT #	
PROJECT #	

PROJECT  
INSPECTOR  
VOICEMAIL:

PROJECT ENGINEER
------------------

NAME
DEPARTMENT OF TRANSPORTATION
NAME
MUNICIPAL WATER
NAME

DEPARTMENT OF TRANSPORTATION - OPS

	NAME	DATE
	STREETLIGHT LAYOUT	
	NAME	DATE
	ELECTRICAL CIRCUITS	
	NAME	DATE


DEPARTMENT OF PUBLIC WORKS



APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 14 OF 20

1ST SUBMITTAL



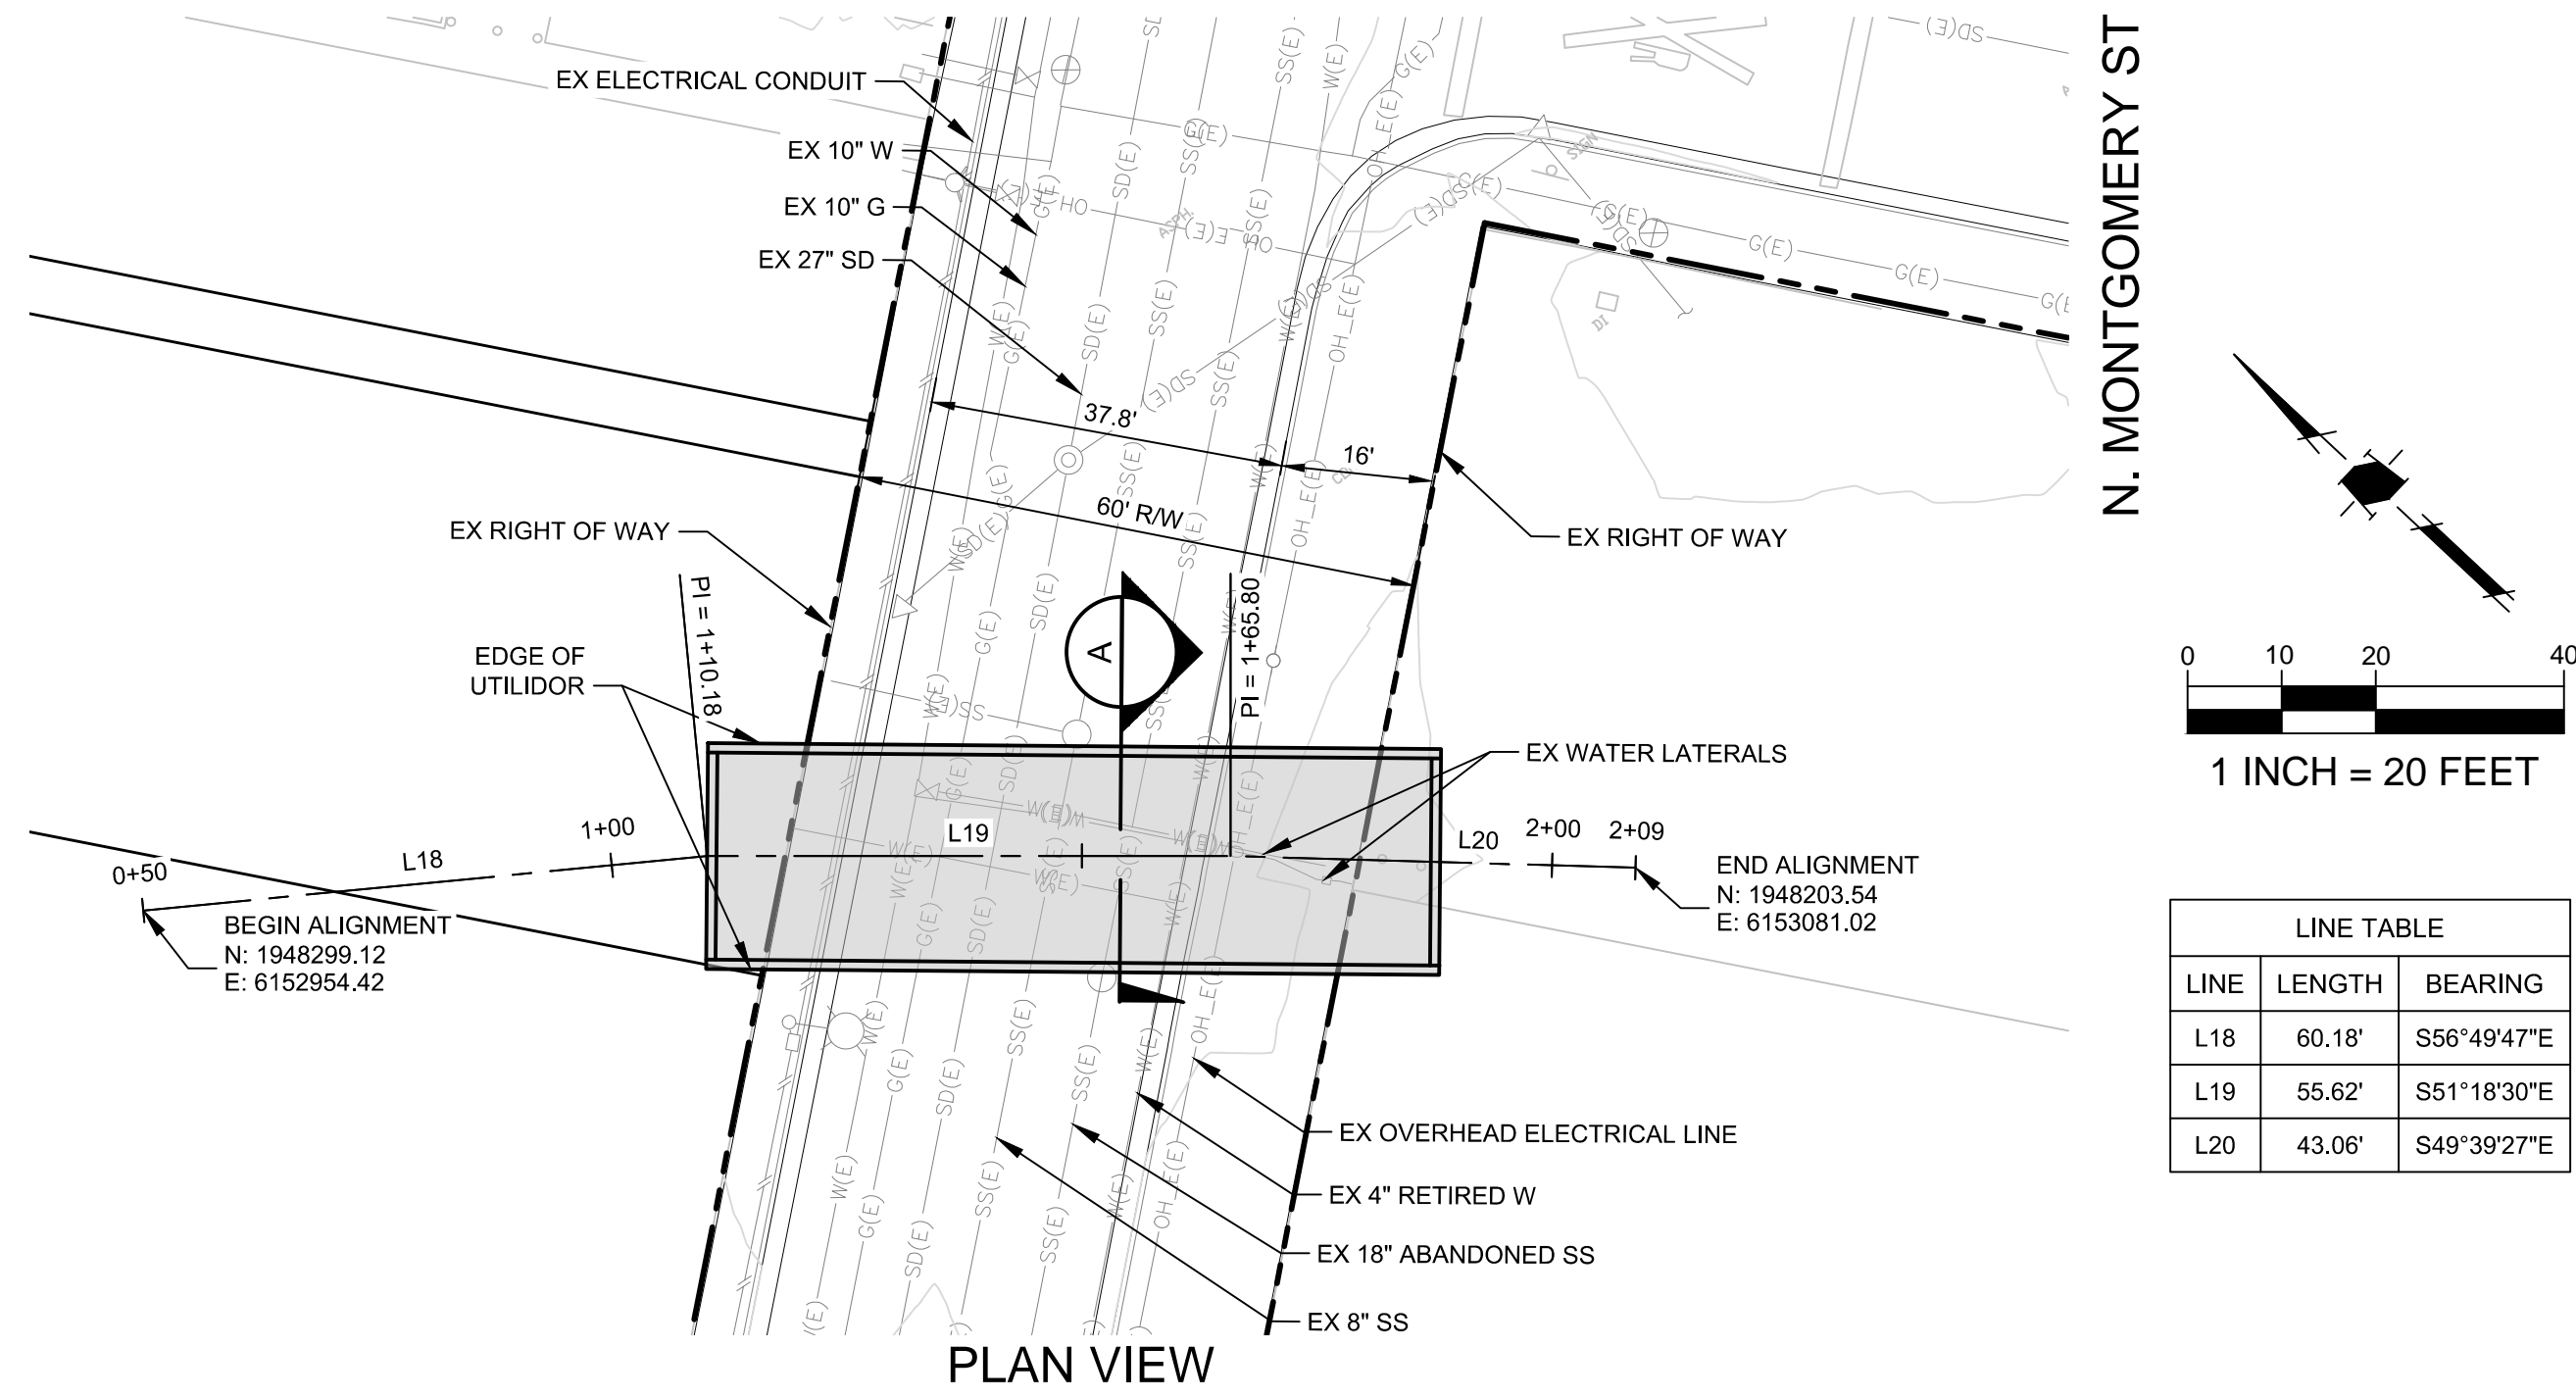


NOTES

1. PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

CAUTION:

PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES. CONTRACTOR TO VERIFY LOCATION PRIOR TO CONSTRUCTION OF ANY IMPROVEMENTS.

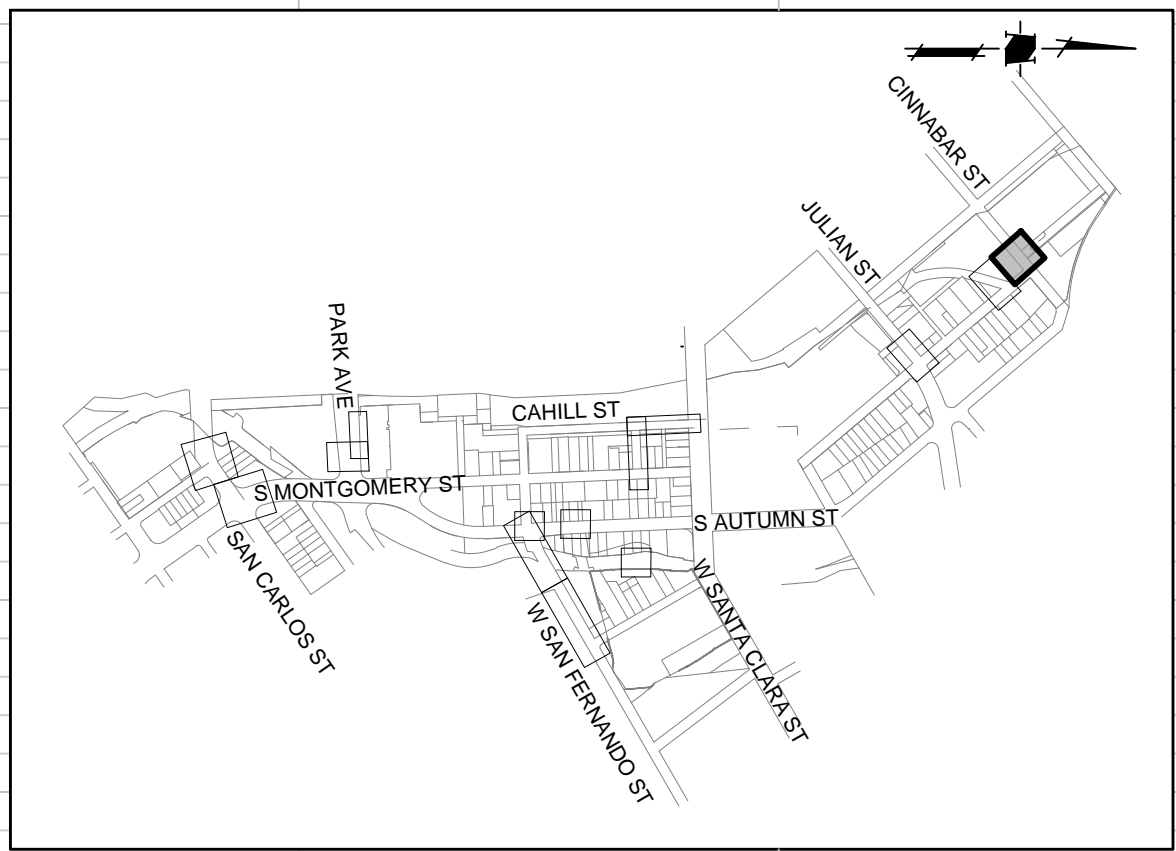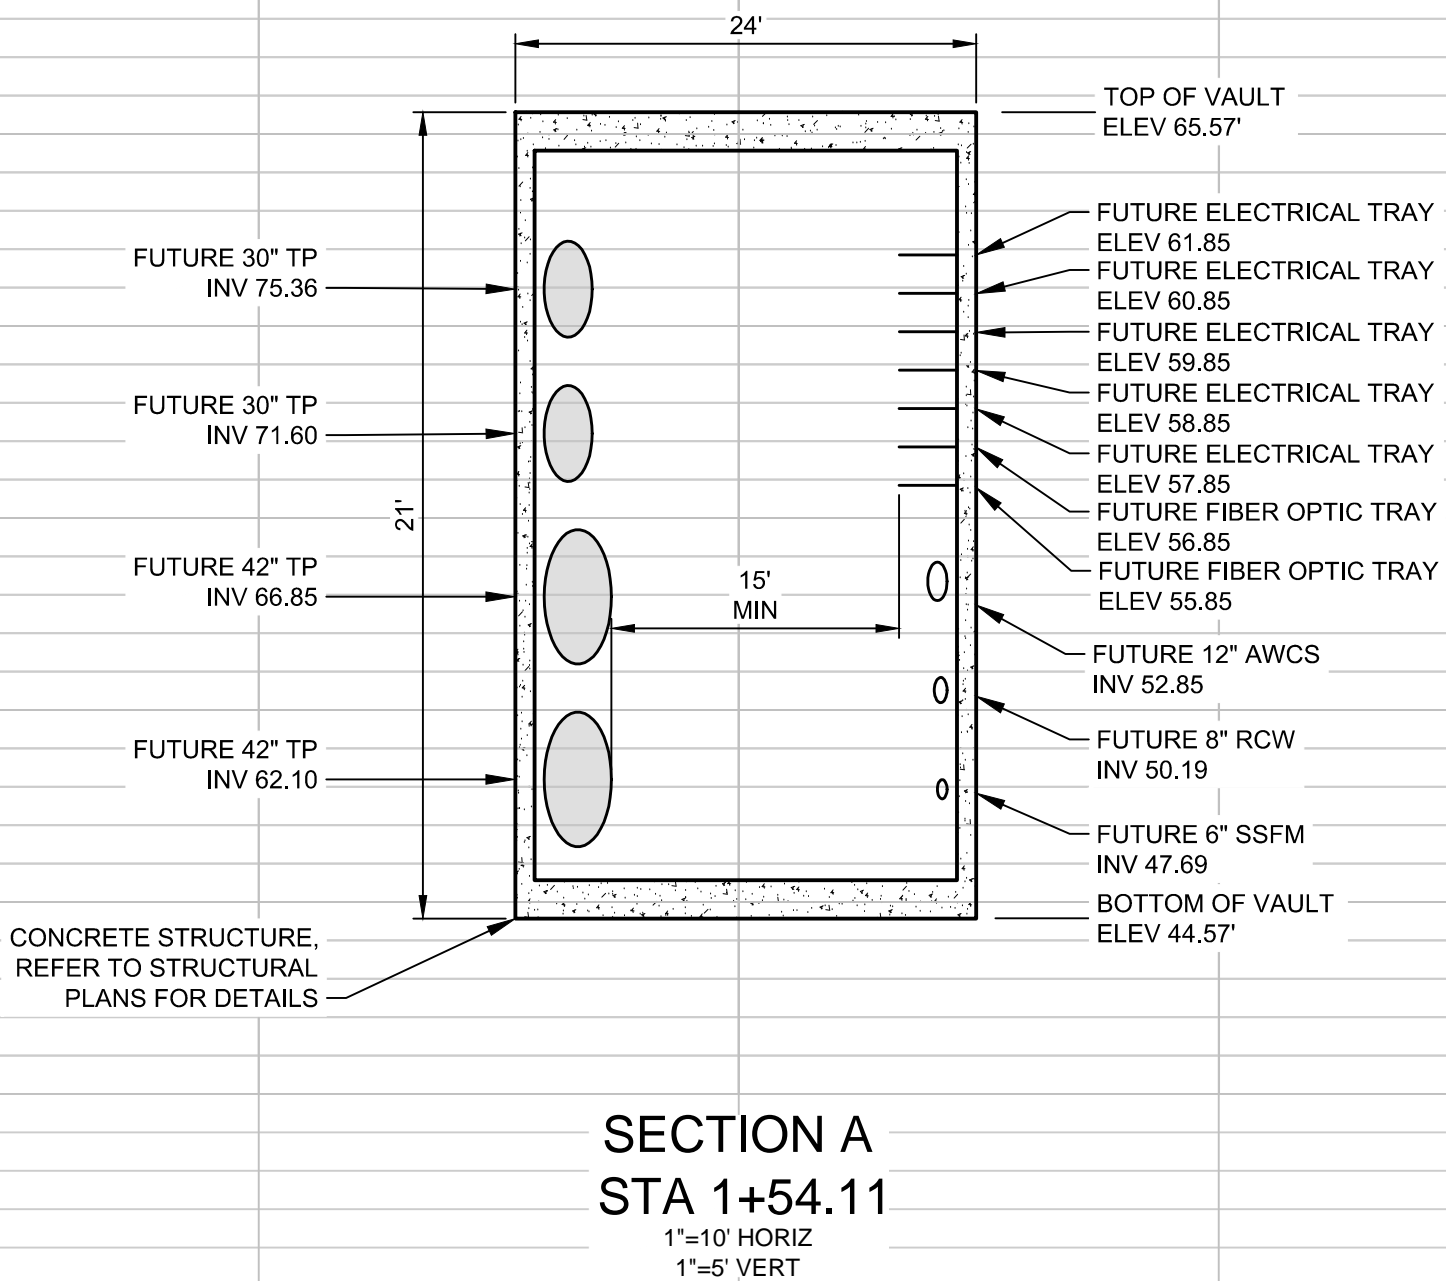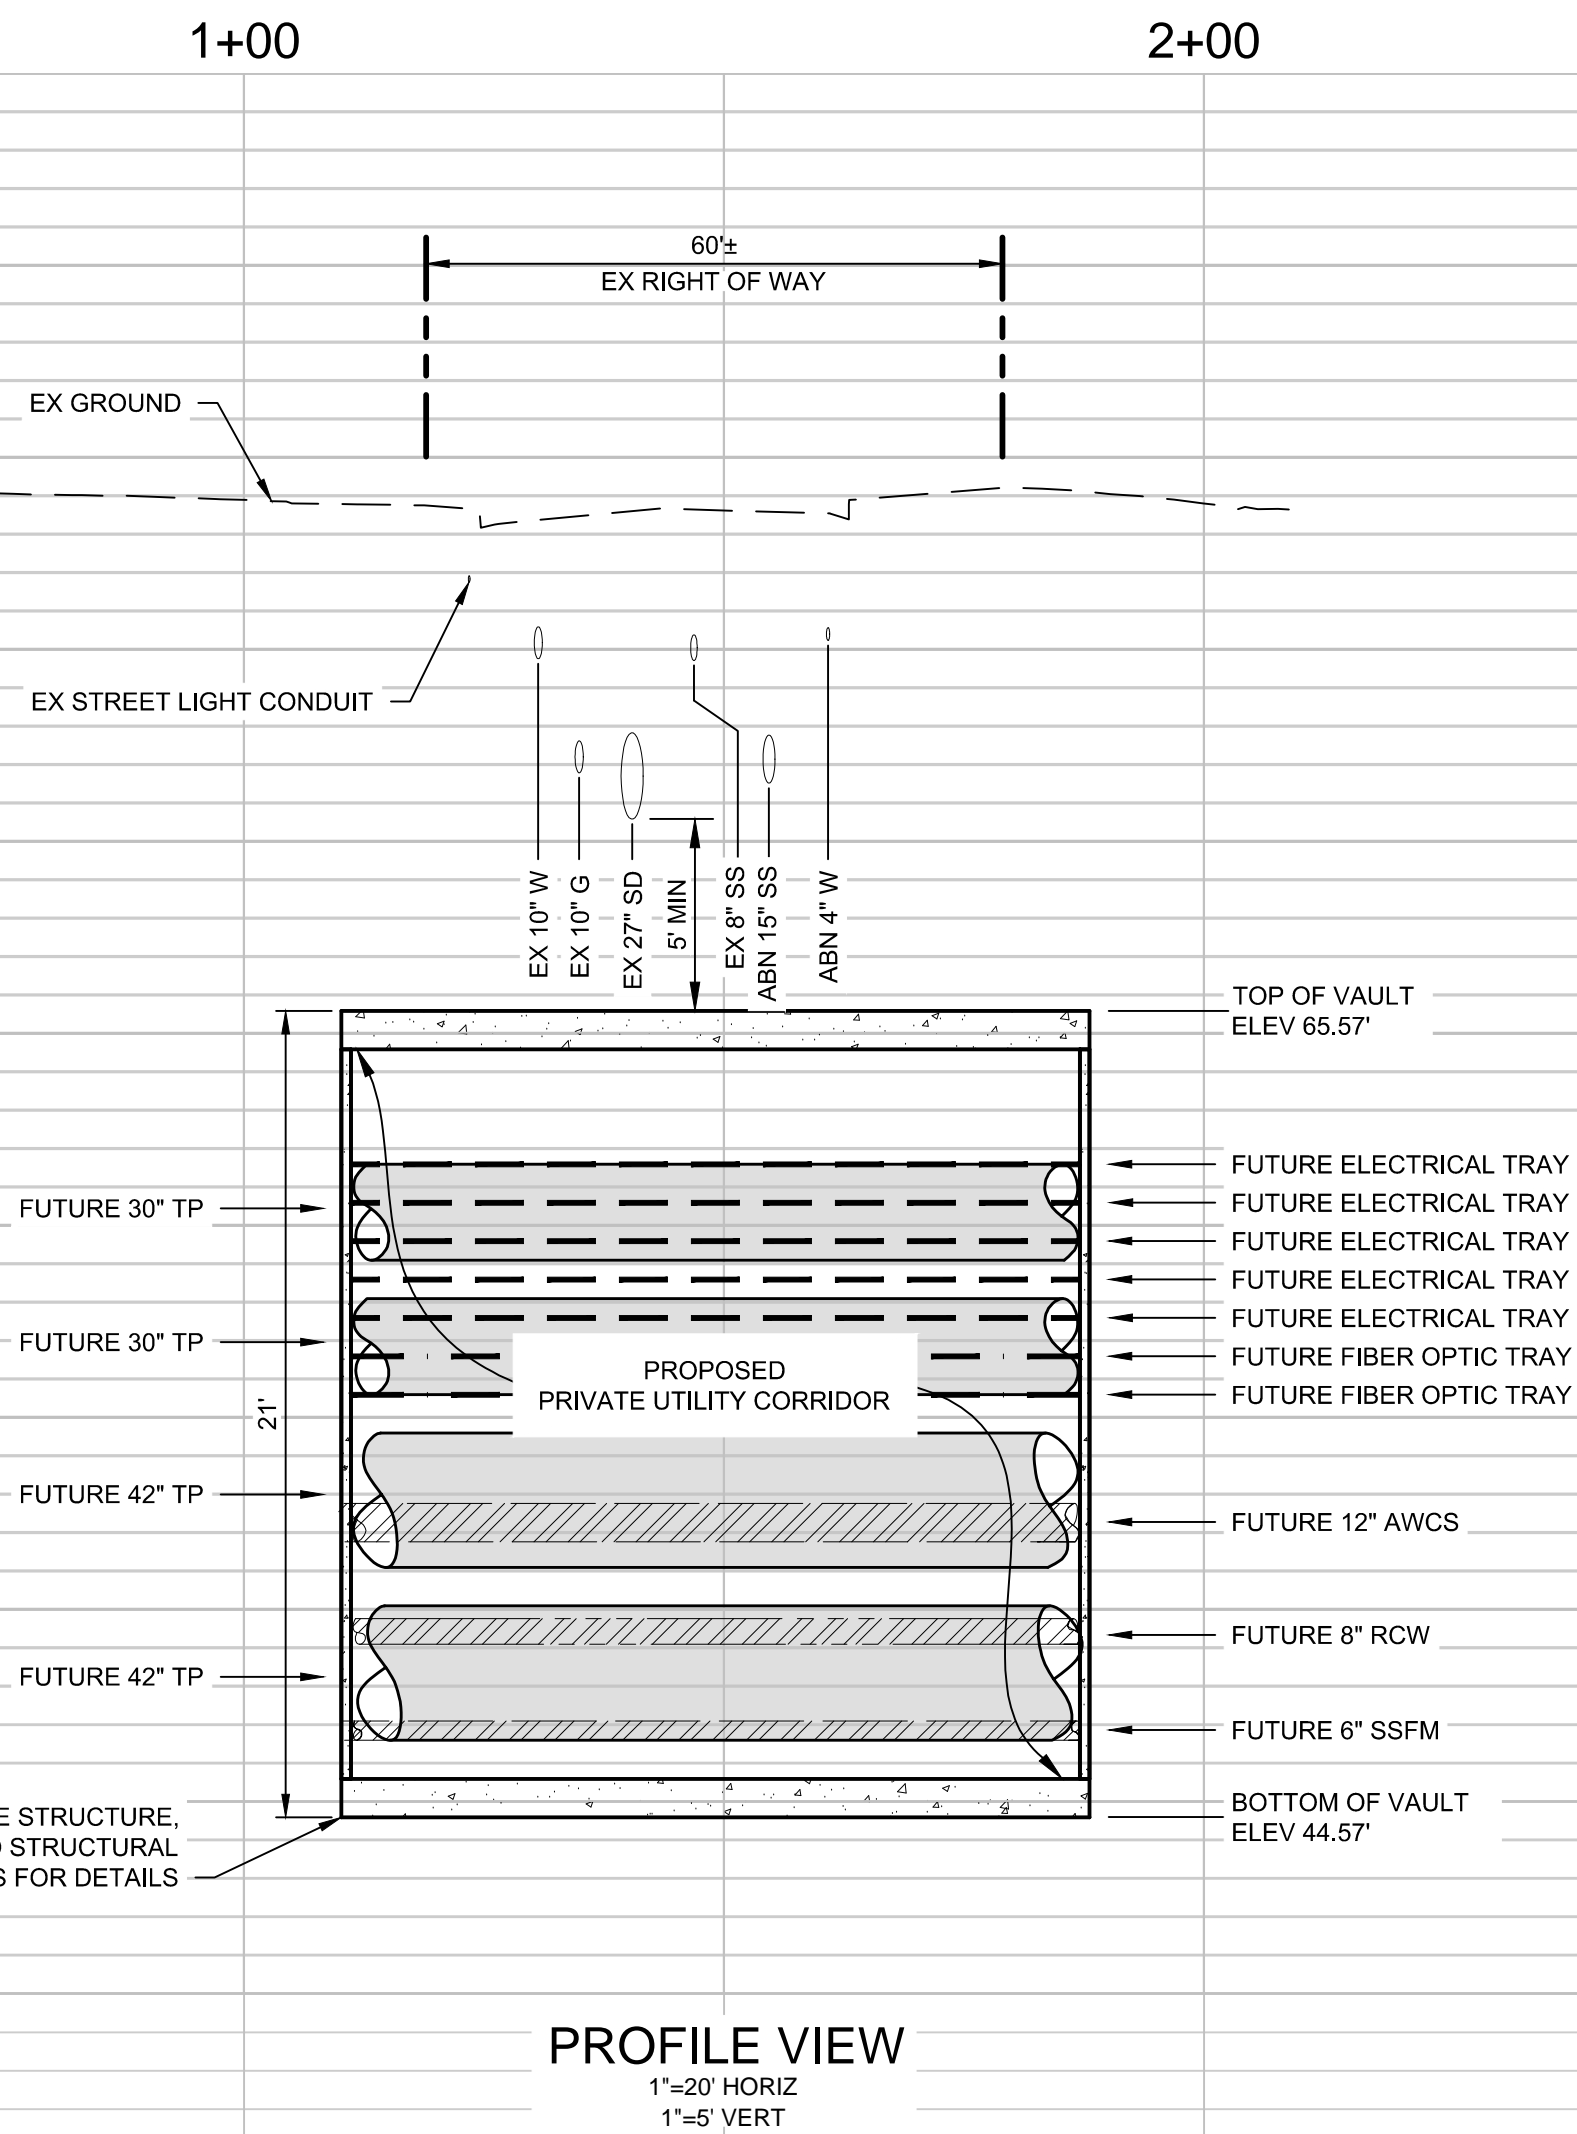

1570 Oakland Road  
San Jose, CA 95131  
(408) 487-2200  
HMHca.com

DATE: SEPTEMBER 8, 2020  
SCALE: AS SHOWN  
DESIGNED: RH  
DRAWN: LA/RM/JBC  
CHECKED: RH  
PROJ. ENGR: RH  
FILE: 571900IP.DWG



PRELIMINARY  
NOT FOR CONSTRUCTION

PLAN  
FOR THE IMPROVEMENT OF THE  
DOWNTOWN WEST UTILIDOR  
CINNABAR STREET

SAN JOSE

CALIFORNIA

PERMIT #  
PROJECT #

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER

NAME  
DATE  
DEPARTMENT OF TRANSPORTATION  
NAME  
DATE  
MUNICIPAL WATER  
NAME  
DATE

DEPARTMENT OF TRANSPORTATION - OPS

NAME  
DATE  
STREETLIGHT LAYOUT  
NAME  
DATE  
ELECTRICAL CIRCUITS  
NAME  
DATE

DEPARTMENT OF PUBLIC WORKS



APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 15 OF 20


1ST SUBMITTAL

CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR ALL SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF PERSONS AND PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR OBTAINING ALL NECESSARY INSURANCE AND BONDING. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.


S:\PROJECTS\571900\DWG\COACHMENT PERMIT\CT DRAWINGS\571900\PP4 PLAN PROFILE-UTILIDOR.DWG, 9/3/2020 3:30 PM




ON THIS PROJECT, EX  
S:\PROJECTS\1900\19ENCR0ACHMENT PERMIT\PILOT DRAWINGS\571900\1905 PLAN PROJ\ELI.DWG: 9/1/2020 3:24 PM

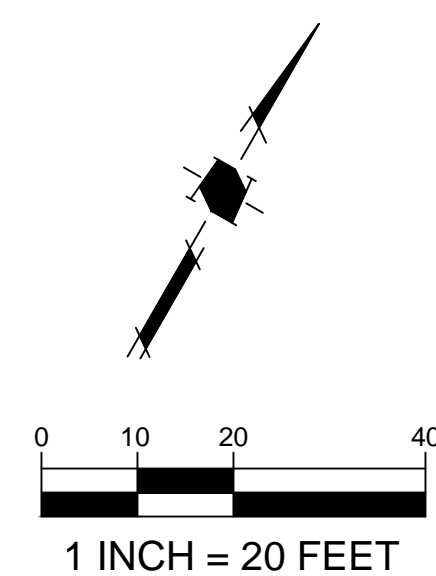


--- MATCH LINE SEE BOTTOM LEFT --- STA 4+75

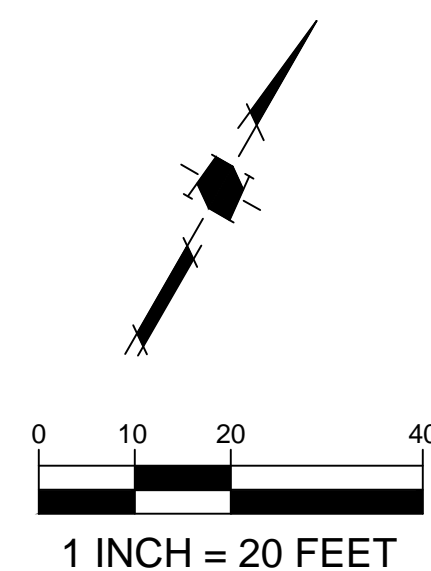

**CAUTION:**  
PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO  
CONSTRUCTION OF ANY IMPROVEMENTS.

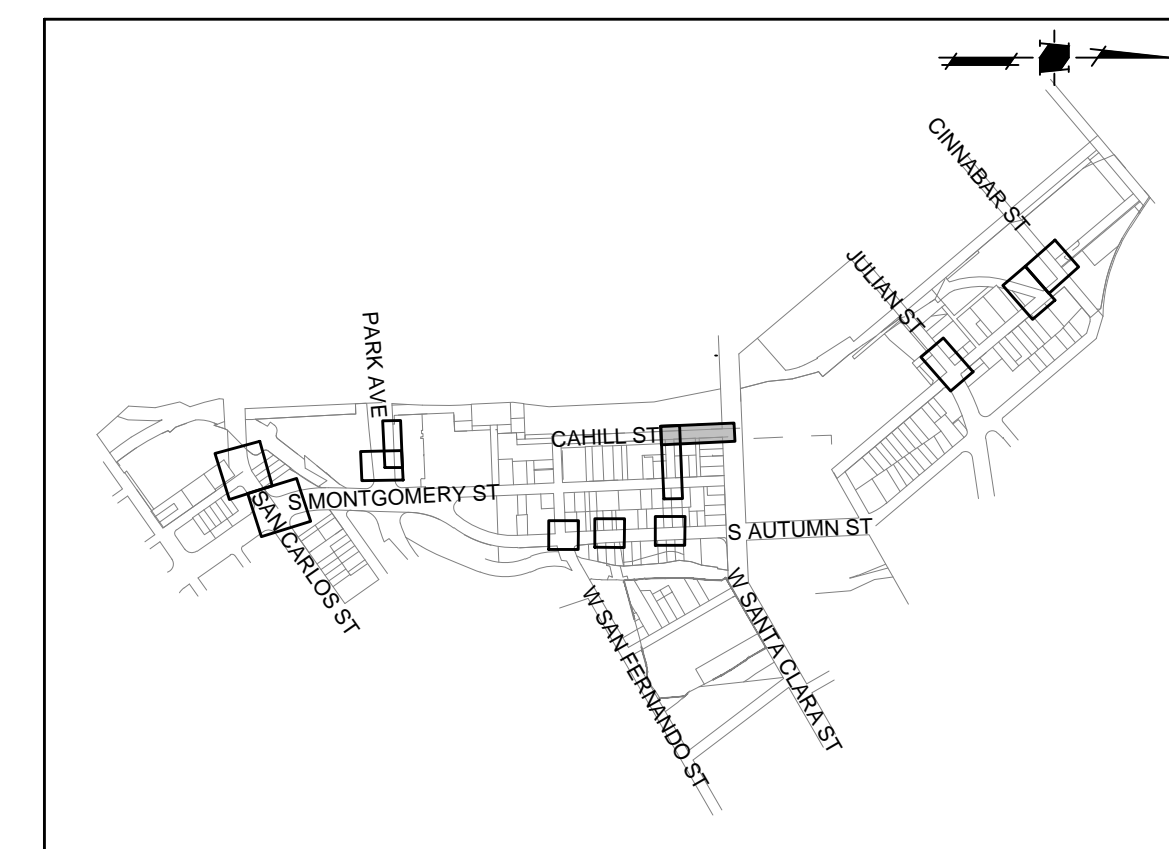

**KEYMAP**  
SCALE: NTS

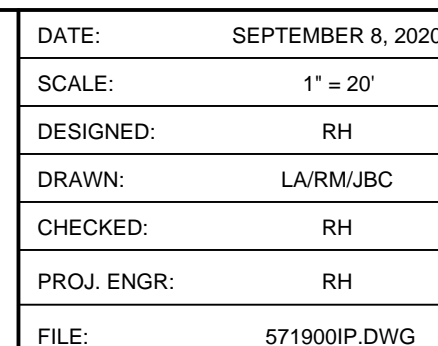

PLAN  
FOR THE IMPROVEMENT OF THE  
DOWNTOWN WEST UTILIDOR  
DEMOLITION PLAN  
WEST SAN FERNANDO STREET  
SAN JOSE CALIFORNIA

PROJECT  
INSPECTOR:  
VOICEMAIL:

NAME
DEPARTMENT OF TRANSPORTATION
NAME
MUNICIPAL WATER
NAME

NAME	DATE
STREETLIGHT LAYOUT	
NAME	DATE
ELECTRICAL CIRCUITS	
NAME	DATE


CITY OF  
**SAN JOSE**  
CAPITAL OF SILICON VALLEY

SHEET 16 OF 20

1ST SUBMITTAL




CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR ALL SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF PERSONS AND PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR THE PROTECTION OF ALL EXISTING UTILITIES AND THE PROTECTION OF THE PUBLIC. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING UTILITIES AND THE PROTECTION OF THE PUBLIC. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING UTILITIES AND THE PROTECTION OF THE PUBLIC.

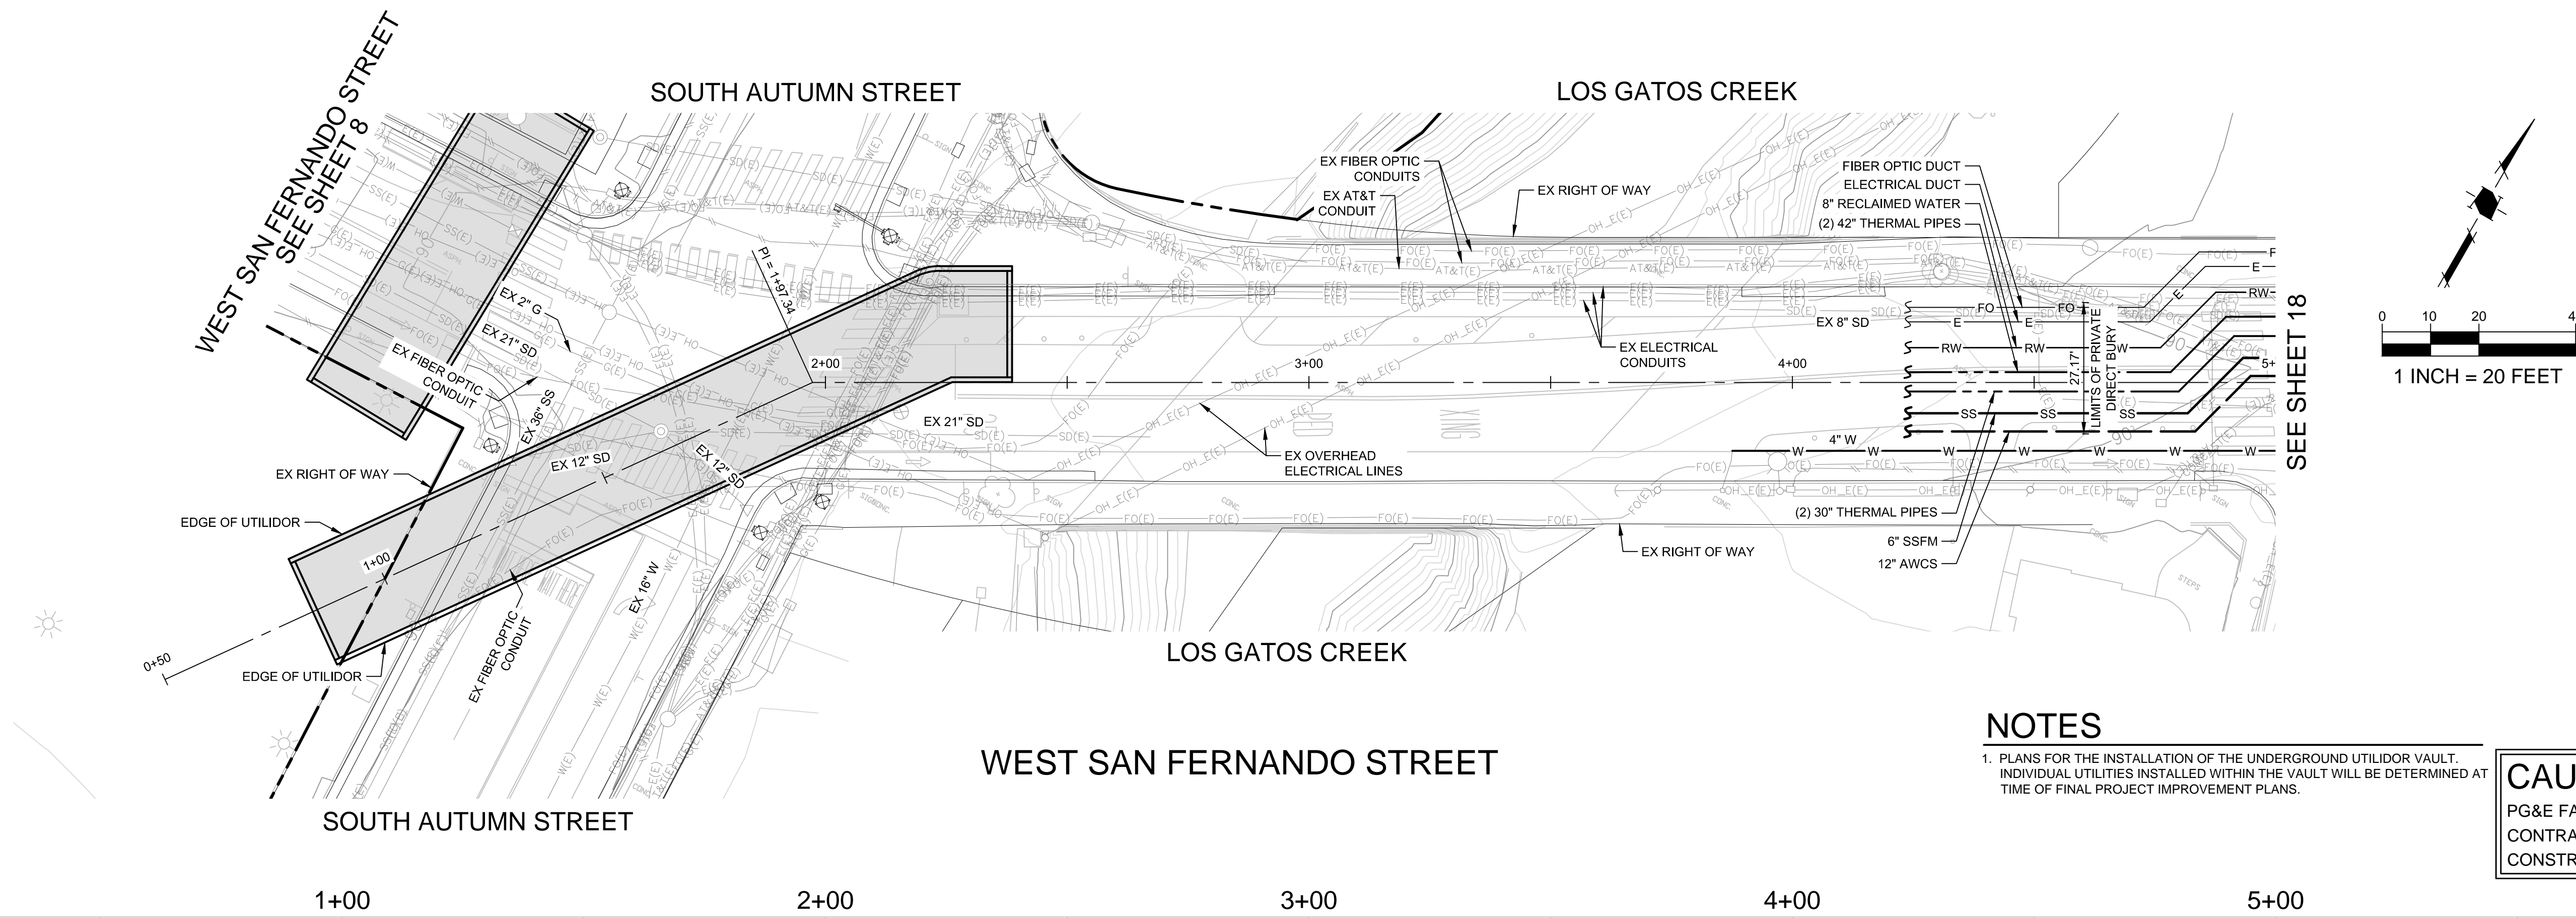

NOTES

- 1. PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILITOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

**CAUTION:**  
PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO  
CONSTRUCTION OF ANY IMPROVEMENTS.

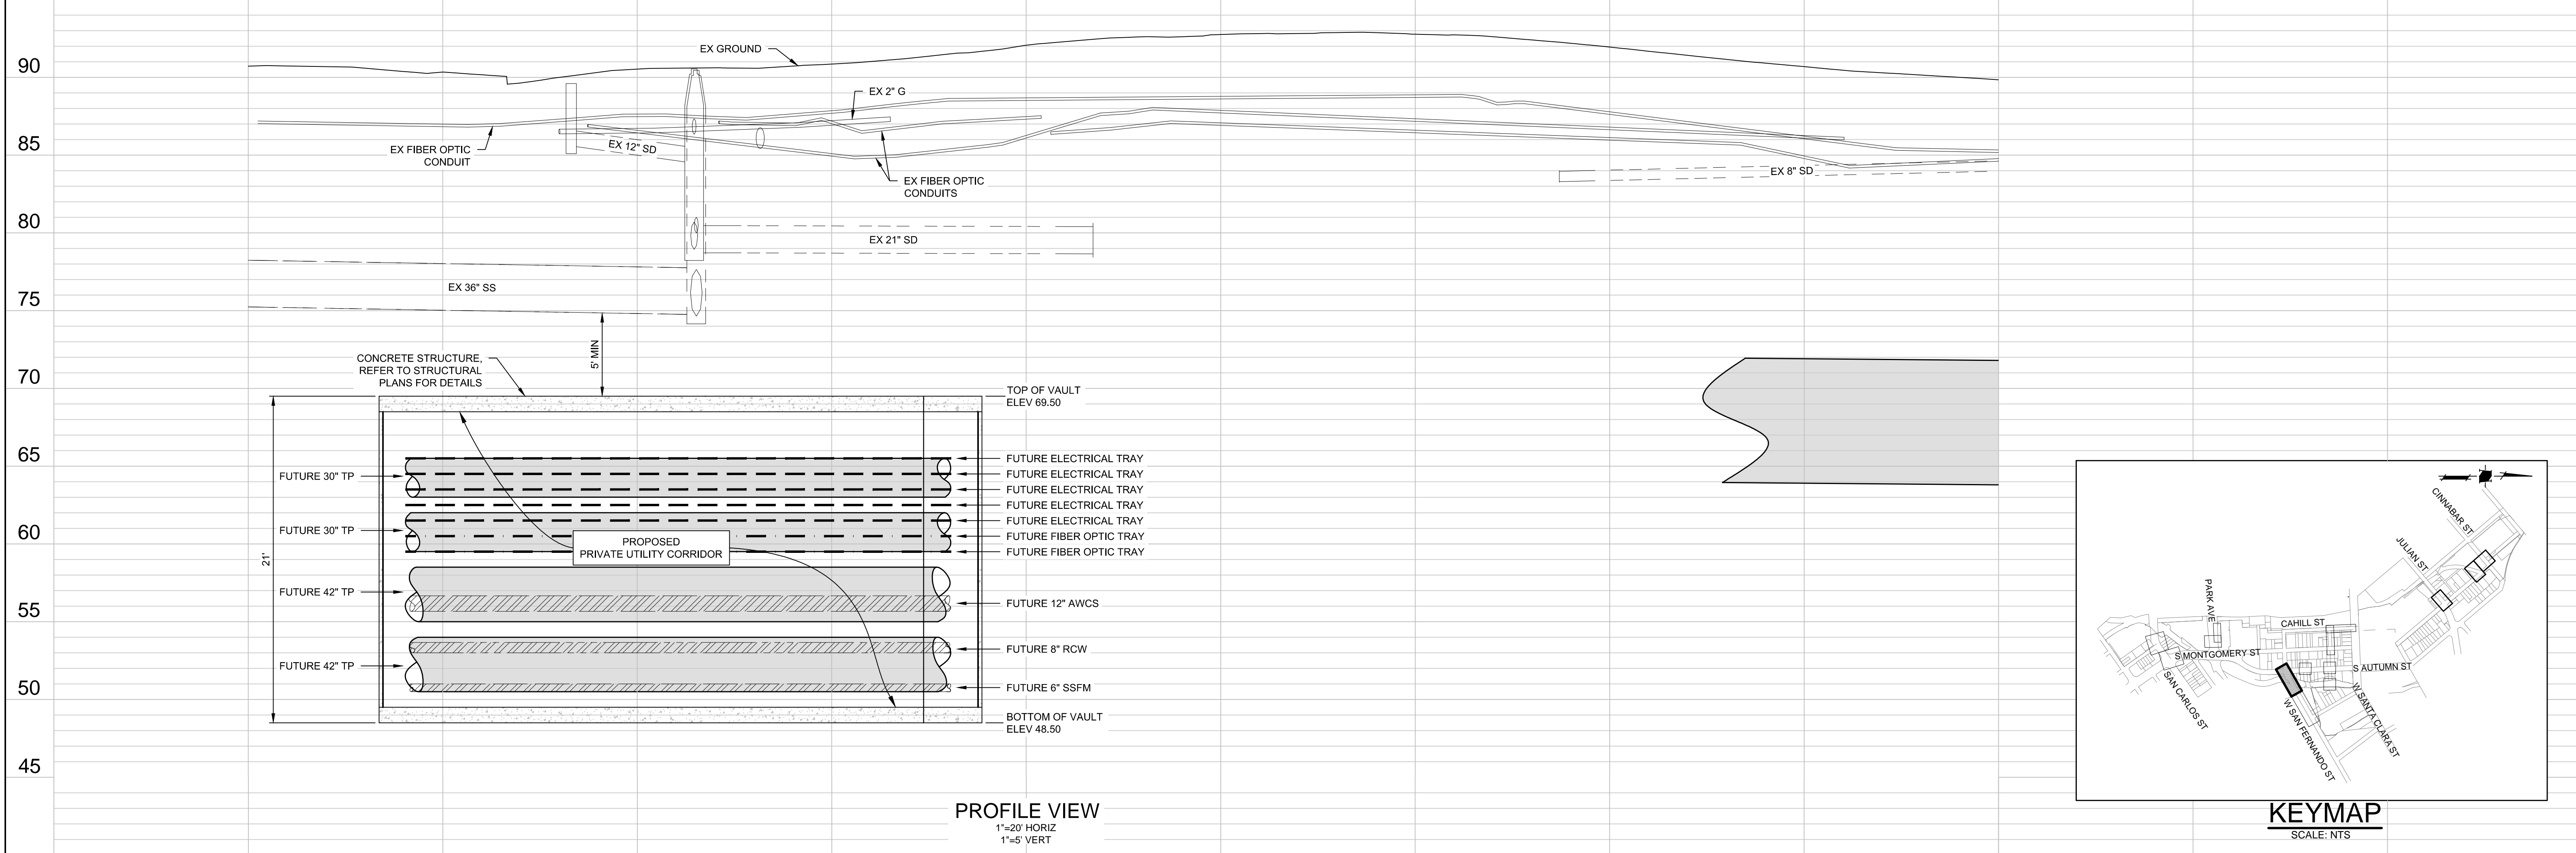

1570 Oakland Road  
San Jose, CA 95131  
(408) 487-2200  
HMHca.com

DATE: SEPTEMBER 8, 2020  
SCALE: H: 1" = 20'; V: 1" = 5'  
DESIGNED: RH  
DRAWN: LA/RM/JBC  
CHECKED: RH  
PROJ. ENGR: RH  
FILE: 571900IP.DWG

**PRELIMINARY  
NOT FOR CONSTRUCTION**

PLAN  
FOR THE IMPROVEMENT OF THE  
**DOWNTOWN WEST UTILITOR  
WEST SAN FERNANDO STREET**

SAN JOSE CALIFORNIA

PERMIT #  
PROJECT #

PROJECT INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER	NAME	DATE
DEPARTMENT OF TRANSPORTATION	NAME	DATE
MUNICIPAL WATER	NAME	DATE

DEPARTMENT OF TRANSPORTATION - OPS	NAME	DATE
STREETLIGHT LAYOUT	NAME	DATE
ELECTRICAL CIRCUITS	NAME	DATE

DEPARTMENT OF PUBLIC WORKS

CITY OF  
**SAN JOSE**  
CAPITAL OF SILICON VALLEY

APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 17 OF 20

[illegible]

PLAN VIEW


WEST SAN FERNANDO STREET

## NOTES


1. PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT.  
INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT  
TIME OF FINAL PROJECT IMPROVEMENT PLANS.

**CAUTION:**

PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO  
CONSTRUCTION OF ANY IMPROVEMENTS.

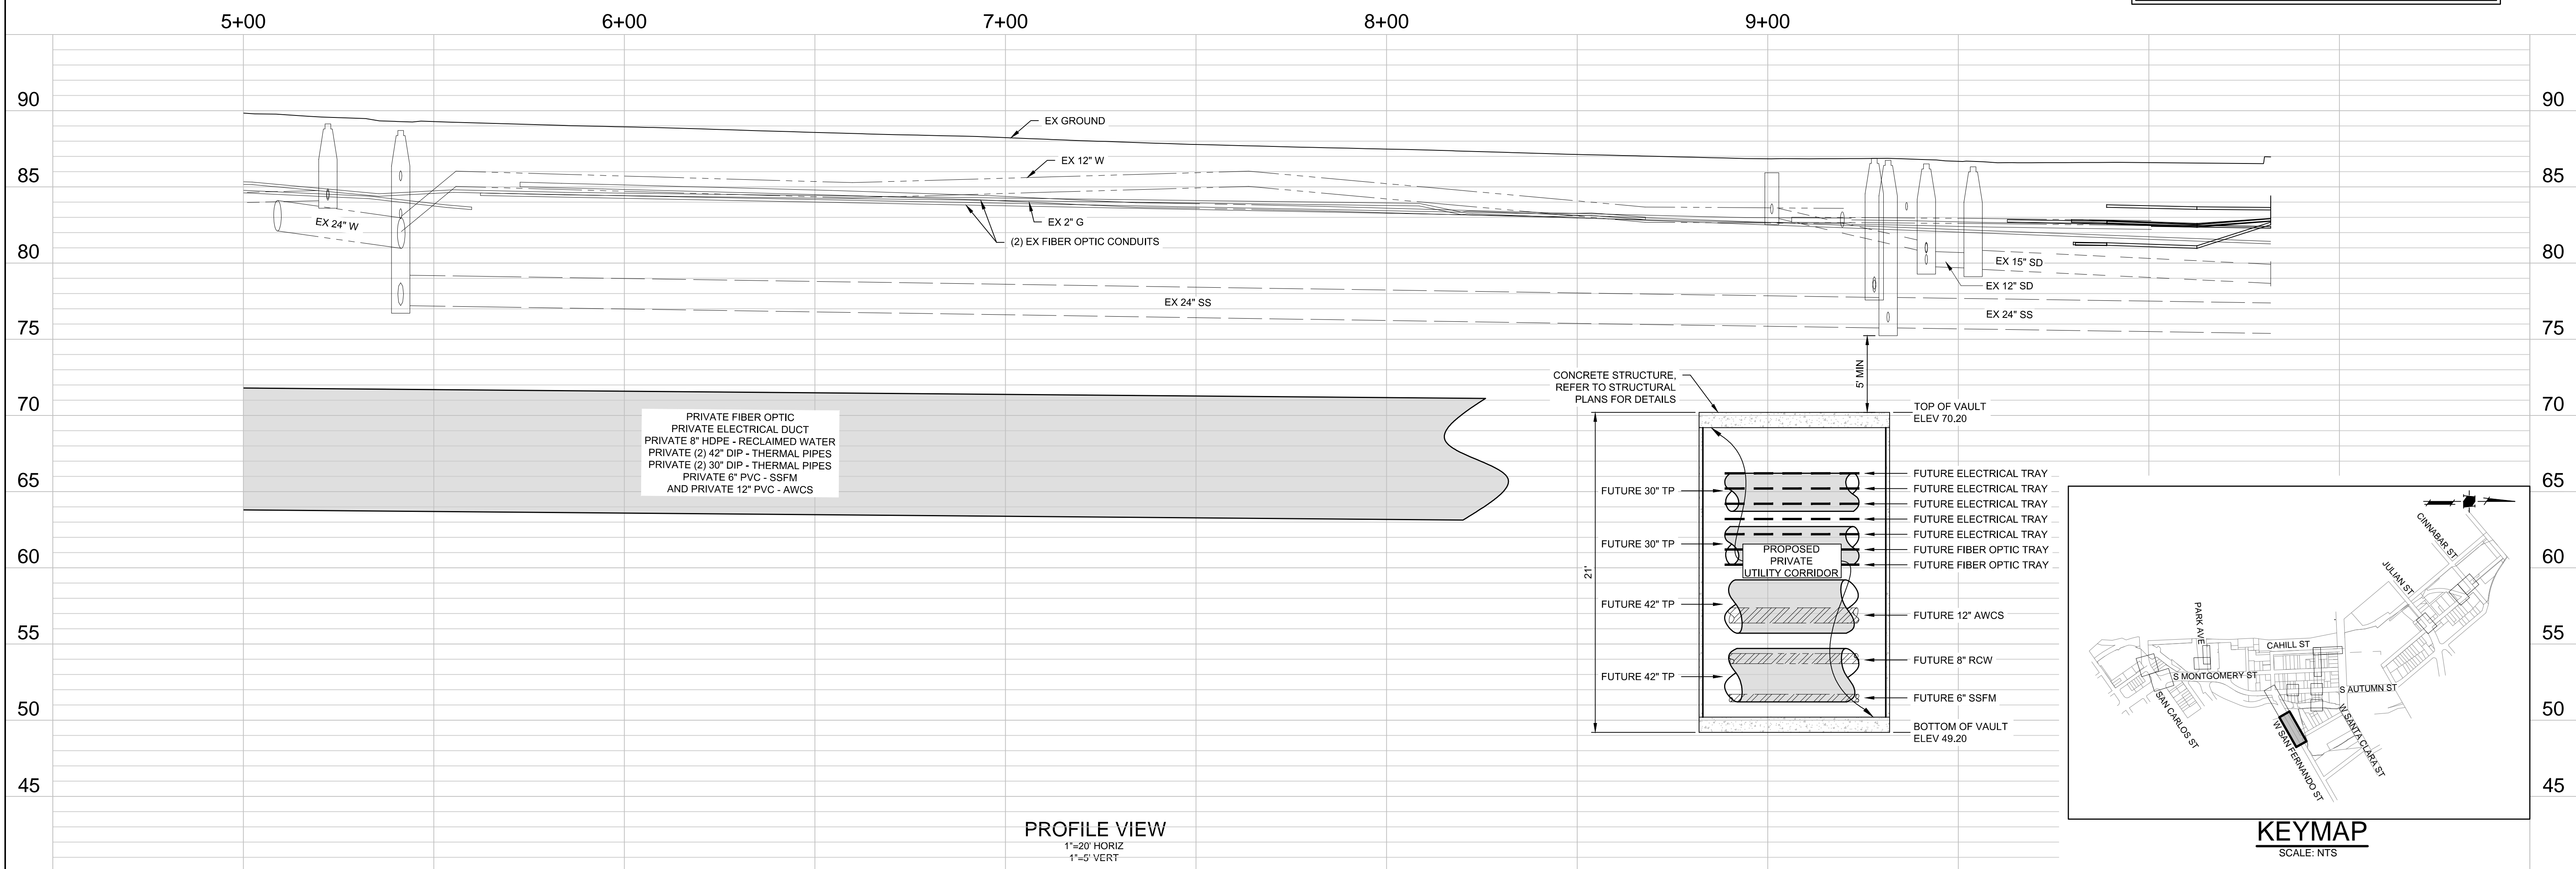

## KEYMAP

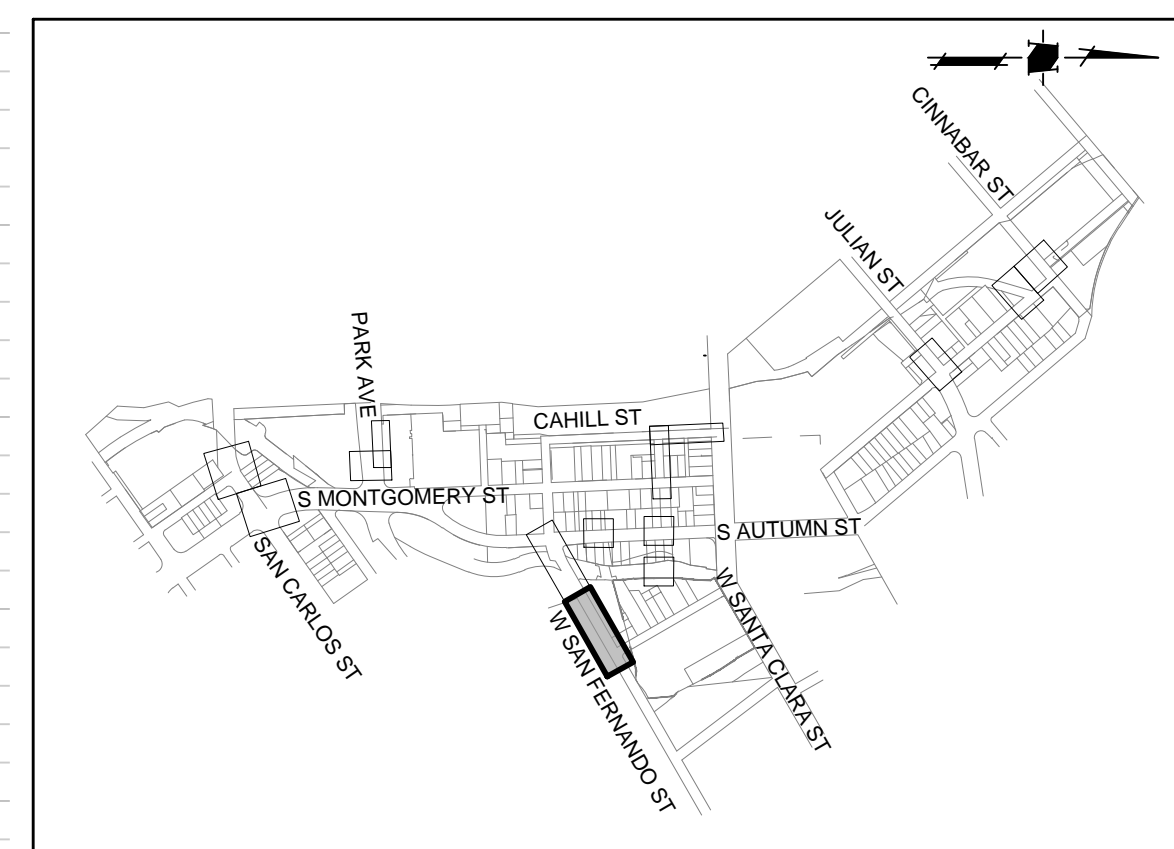

DATE:	SEPTEMBER 8, 2020
SCALE:	H: 1" = 20'; V: 1" = 5'
DESIGNED:	RH
DRAWN:	LA/RM/JBC
CHECKED:	RH
PROJ. ENGR:	RH
FILE:	571900P.DWG



PRELIMINARY  
NOT FOR CONSTRUCTION

# PLAN FOR THE IMPROVEMENT OF THE DOWNTOWN WEST UTILIDOR WEST SAN FERNANDO STREET

SAN JOSE

CALIFORNIA

PERMIT #
PROJECT #

PROJECT INSPECTOR:	
VOICEMAIL:	

PROJECT ENGINEER
------------------

NAME
DEPARTMENT OF TRANSPORTATION
NAME
MUNICIPAL WATER
NAME

DEPARTMENT OF TRANSPORTATION - OPS

NAME	STREETLIGHT LAYOUT
NAME	ELECTRICAL CIRCUITS
NAME	

DEPARTMENT OF PUBLIC WORKS




APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS

SHEET 18 OF 20

1ST SUBMITTAL

CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR ALL SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF PERSONS AND PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND FOR THE PROTECTION OF ALL EXISTING UTILITIES AND THE PROTECTION OF THE PUBLIC. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

S:\PROJECTS\571900\DWG\CONCRETE\PERMIT\T-UTLIDOR-04-CRECK.DWG, 9/3/2020, 1:00 PM

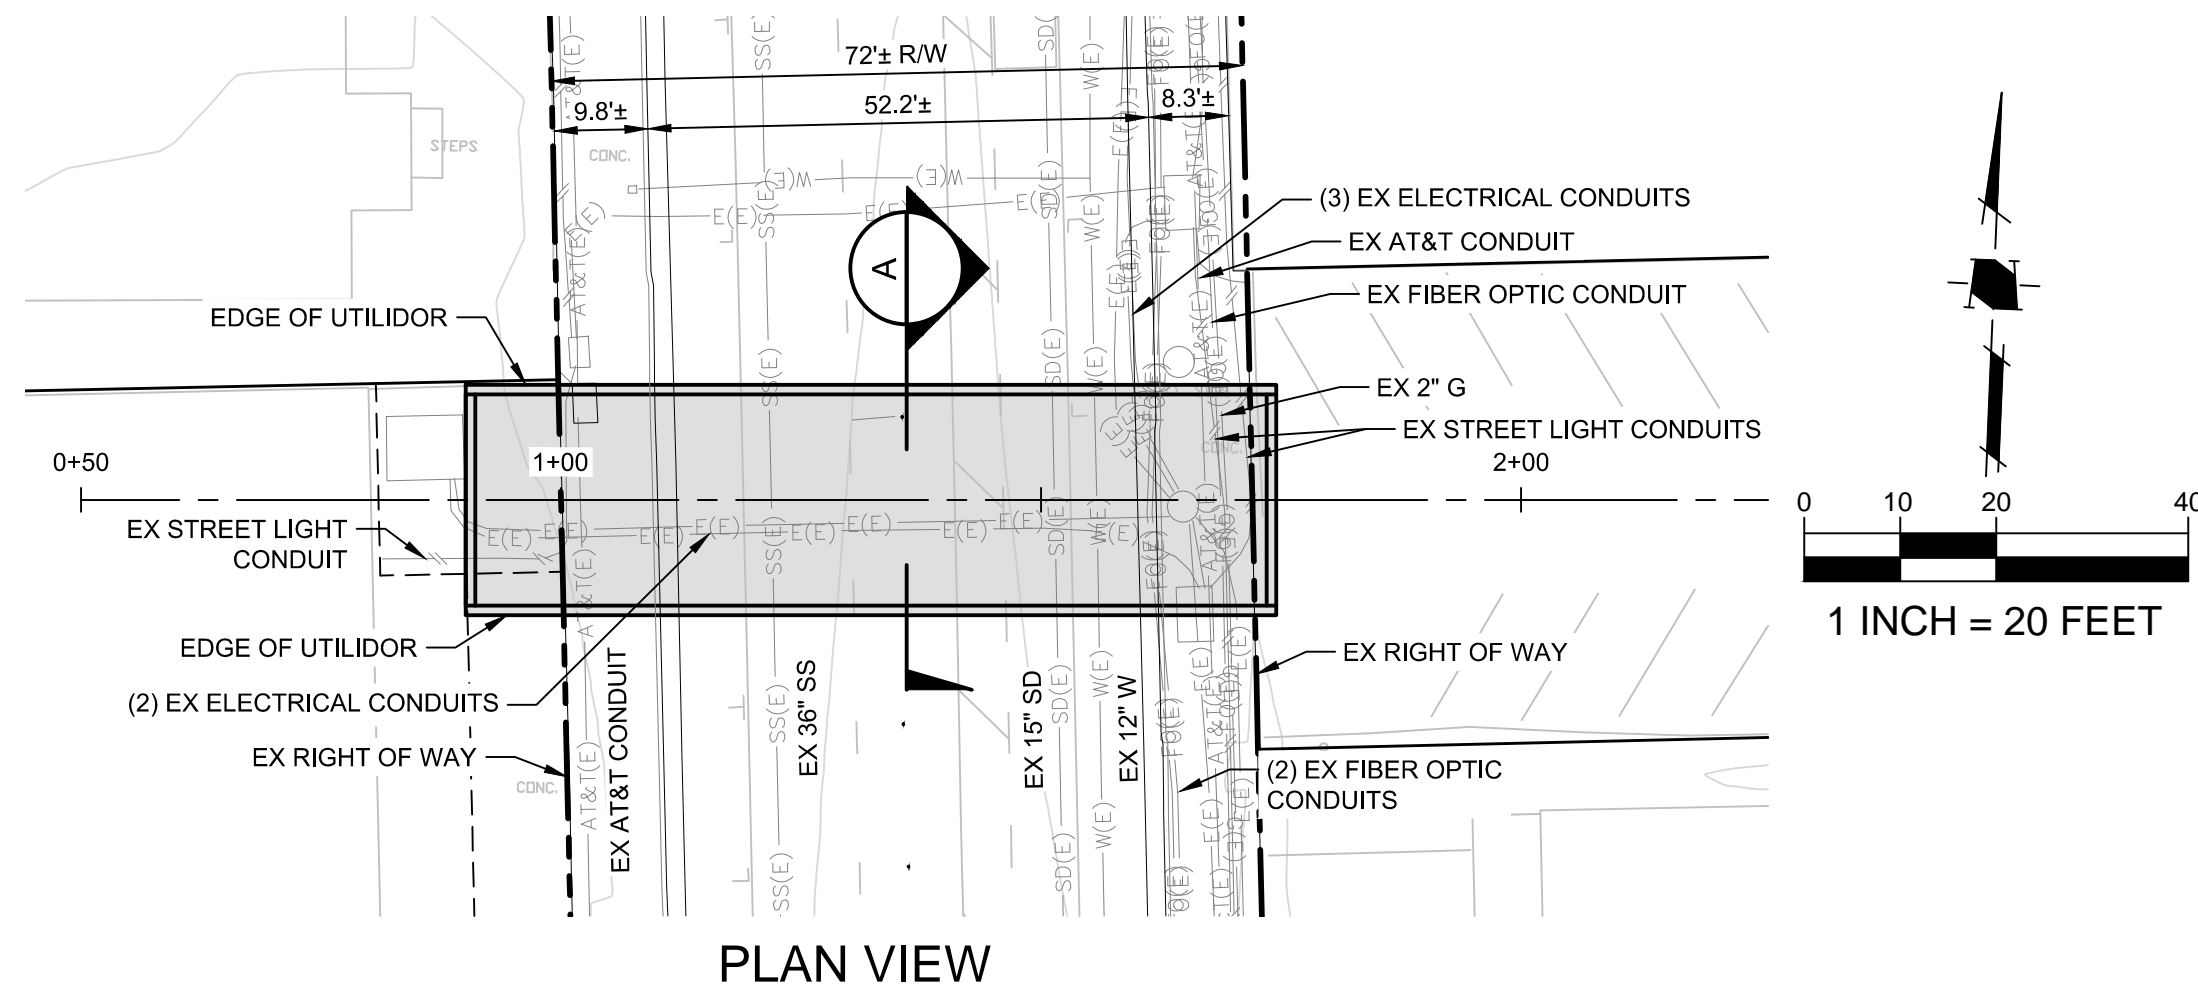




## SOUTH AUTUMN STREET

## NOTES

- PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

## CAUTION:

PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES. CONTRACTOR TO VERIFY LOCATION PRIOR TO CONSTRUCTION OF ANY IMPROVEMENTS.

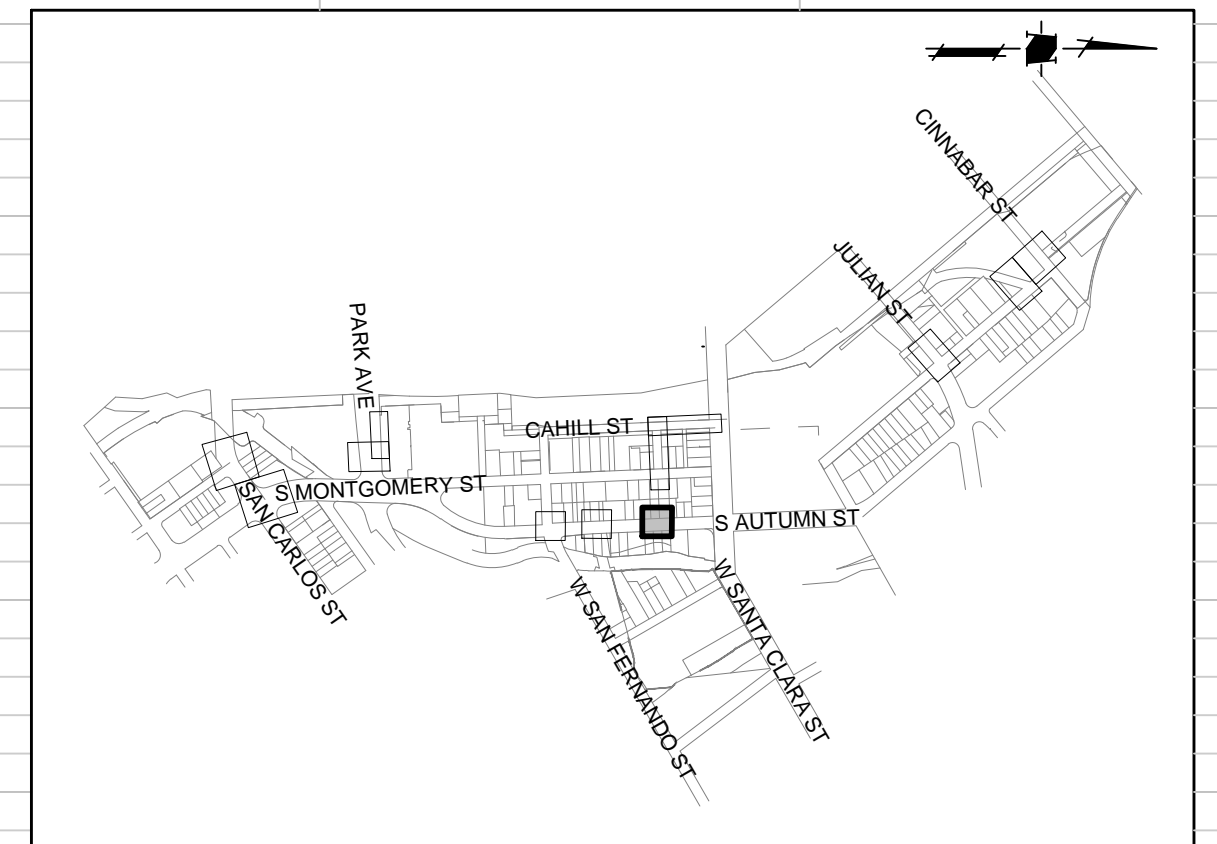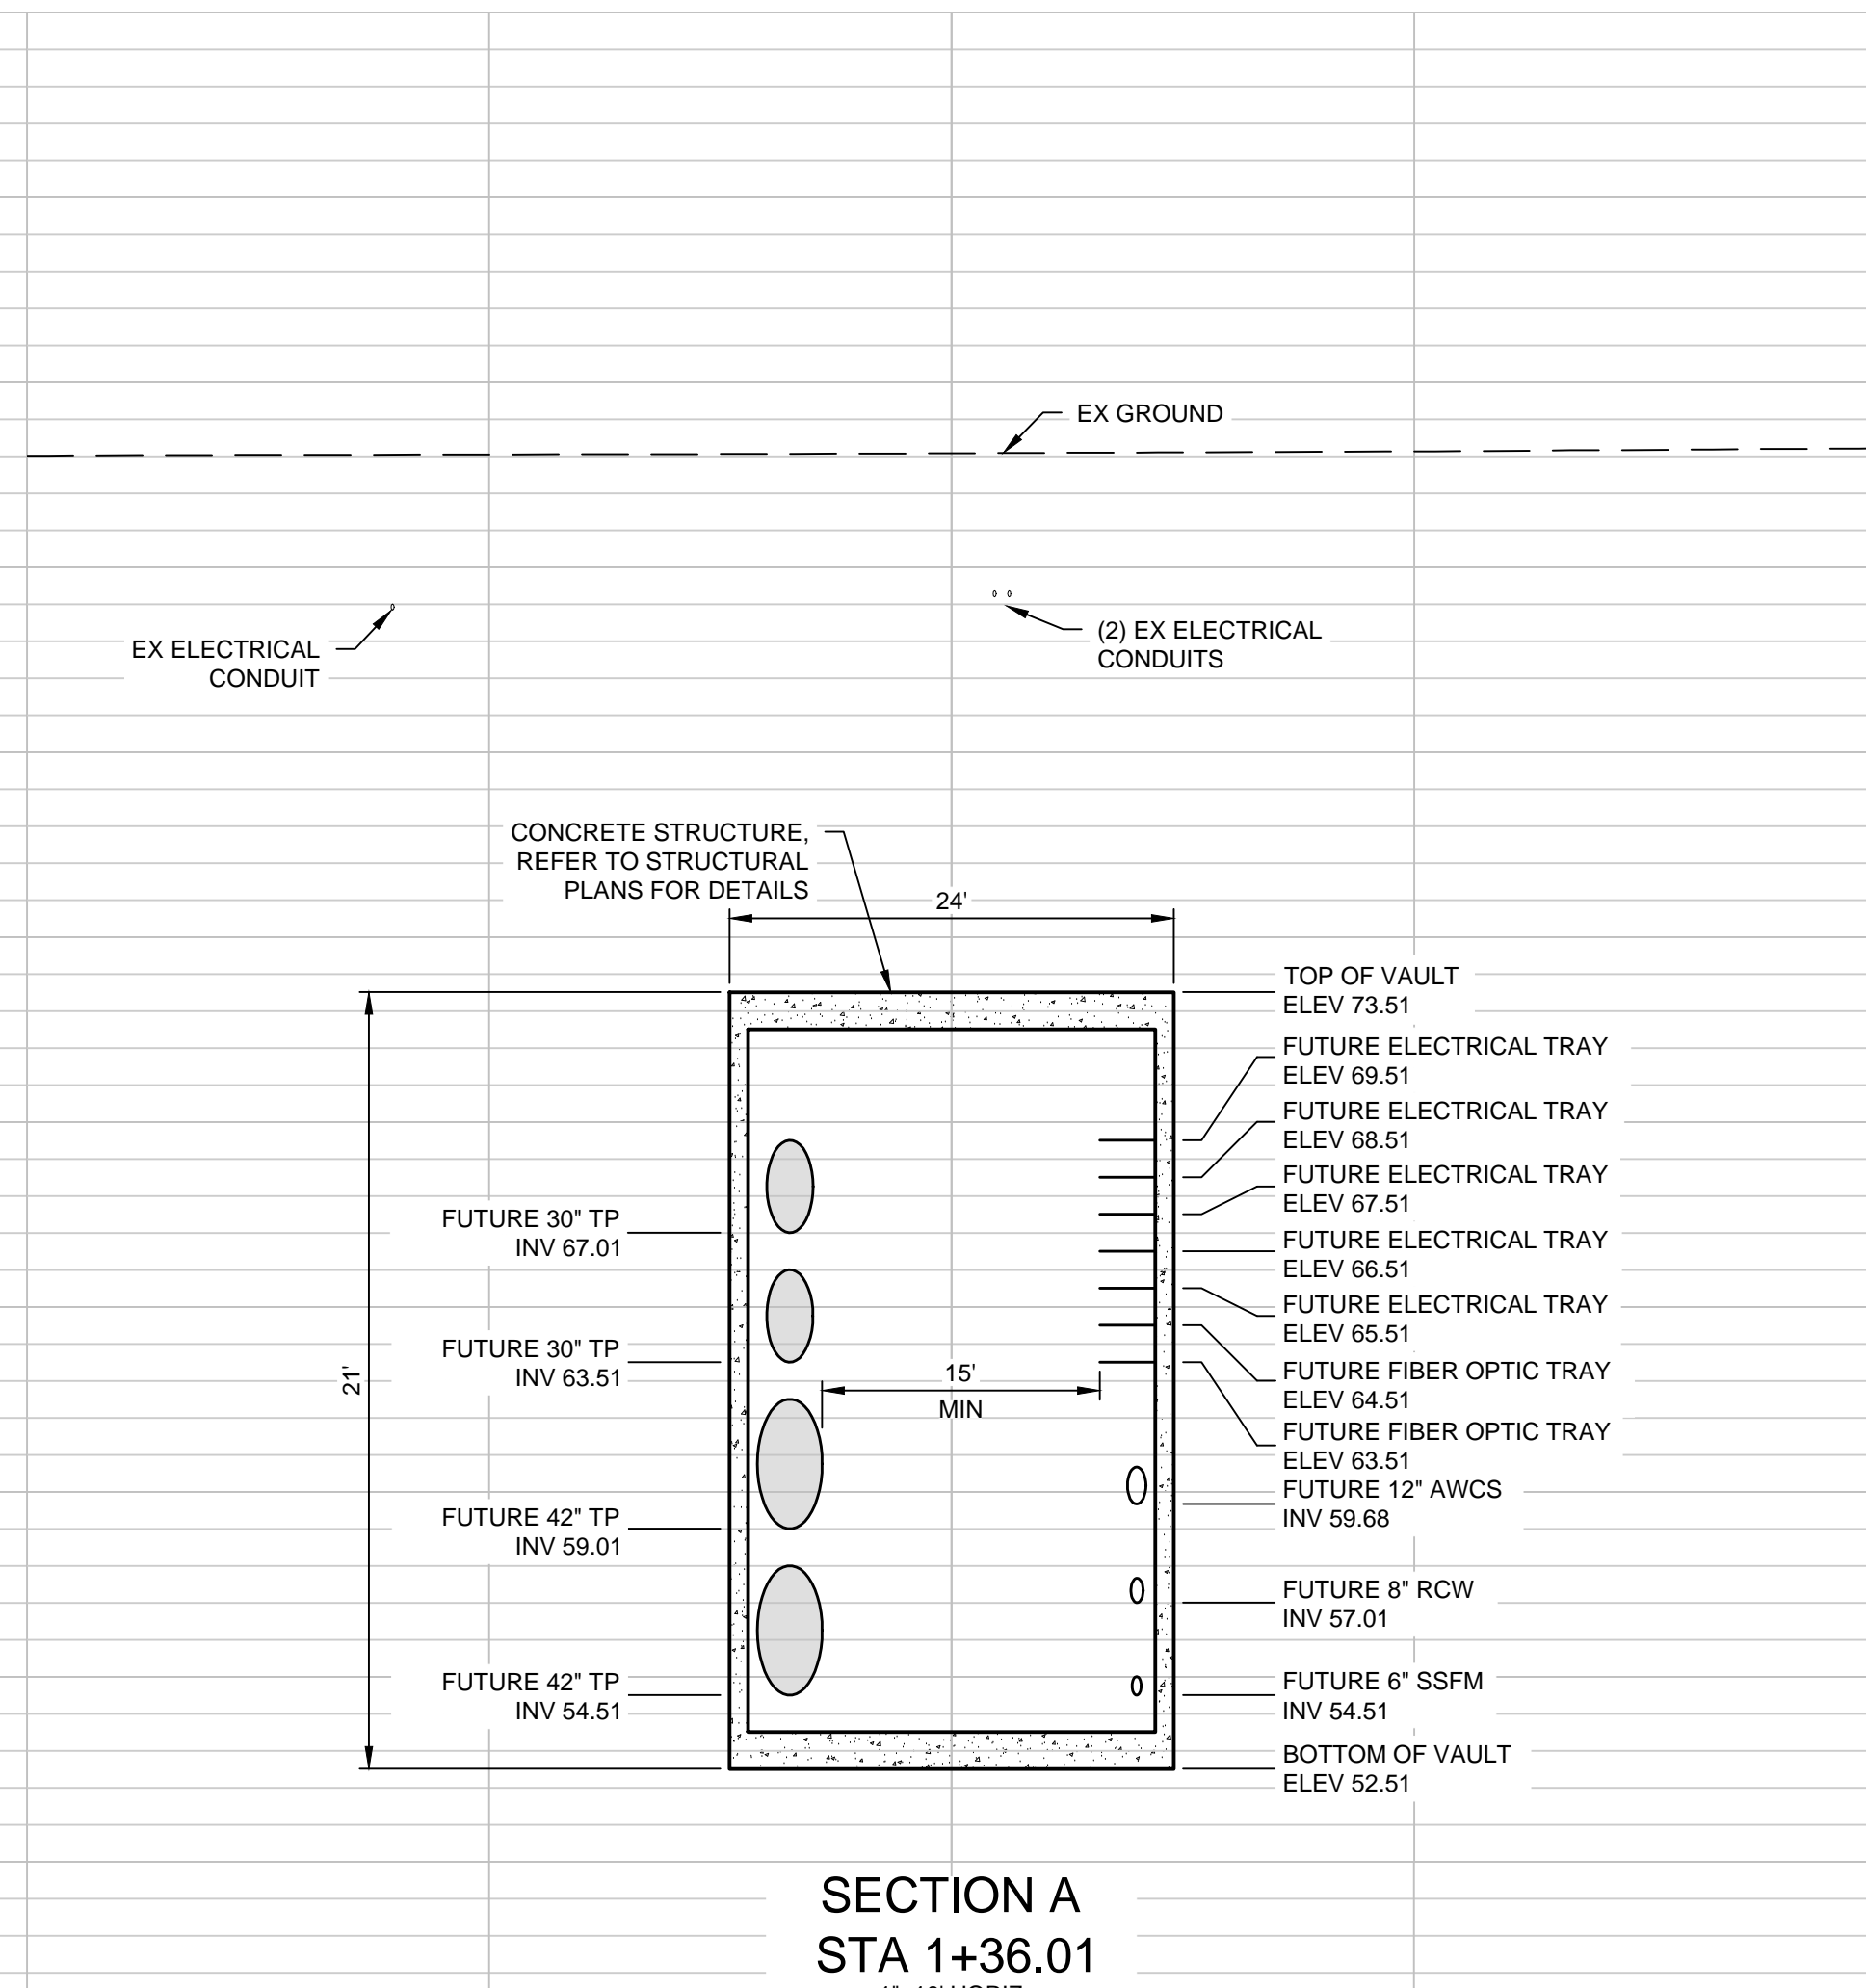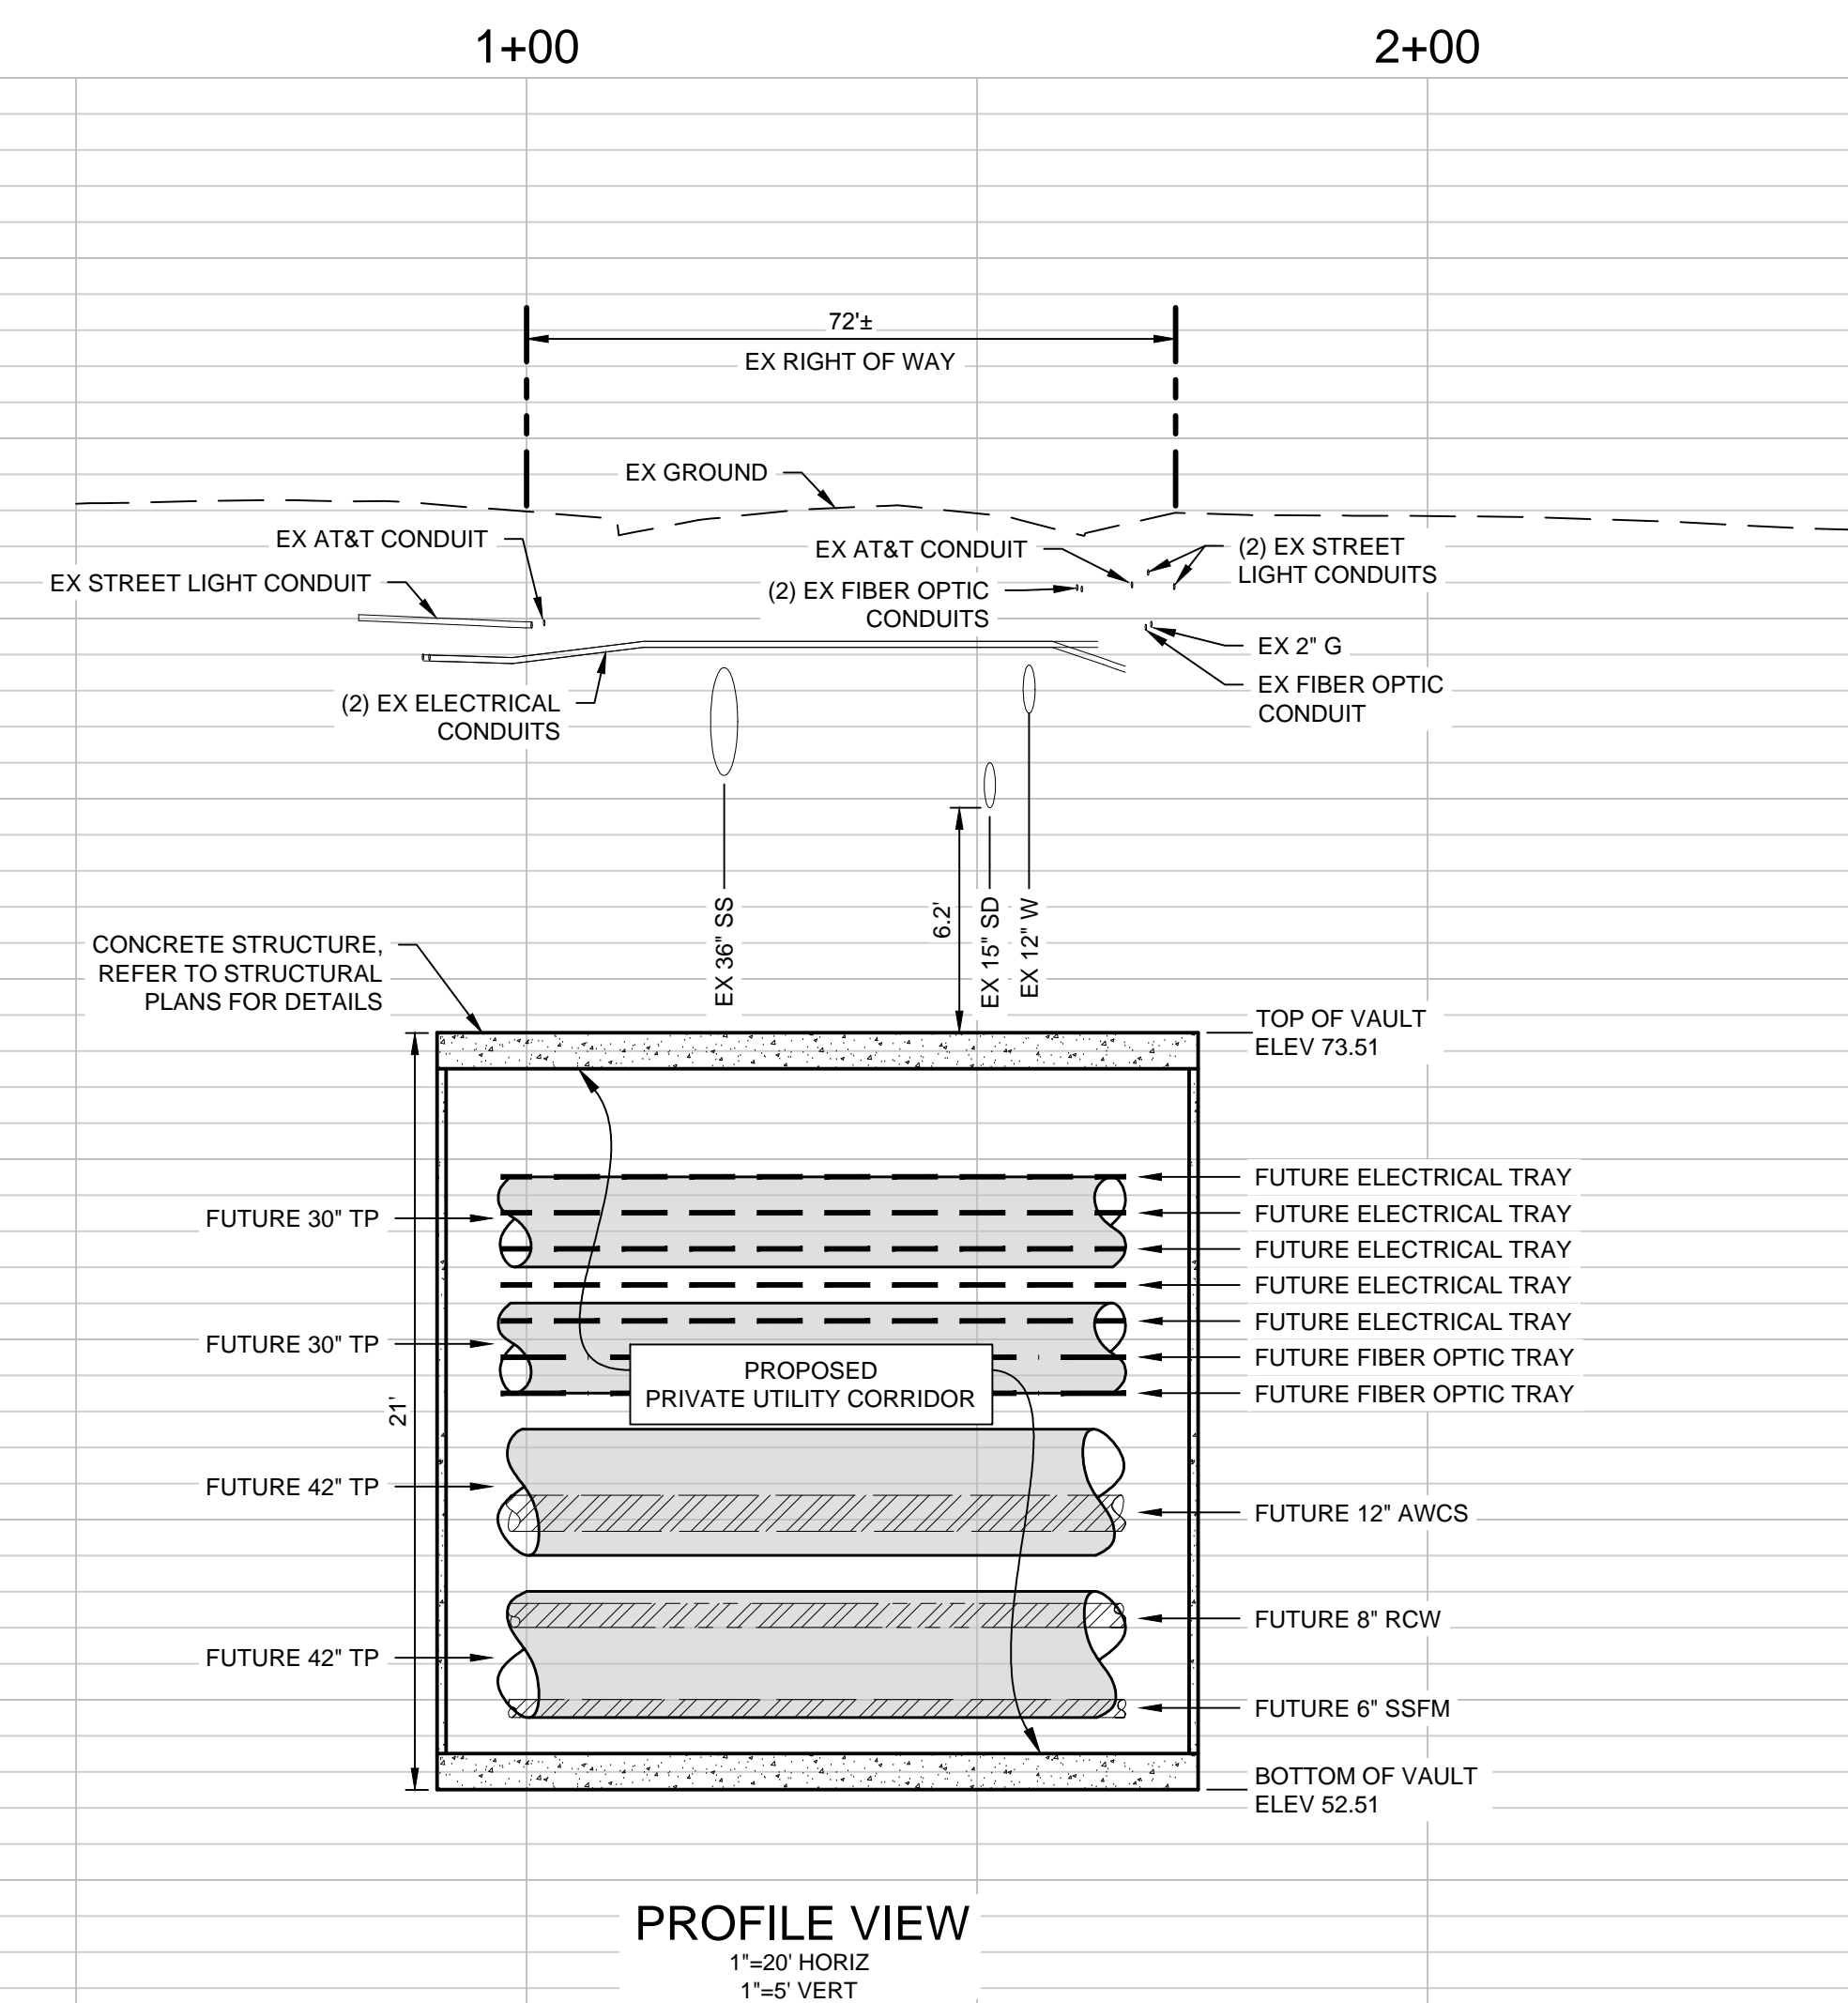

## KEYMAP

SCALE: NTS



DATE: SEPTEMBER 8, 2020  
SCALE: AS SHOWN  
DESIGNED: RH  
DRAWN: LA/RM/JBC  
CHECKED: RH  
PROJ. ENGR: RH  
FILE: 571900IP.DWG



PRELIMINARY  
NOT FOR CONSTRUCTION

PLAN  
FOR THE IMPROVEMENT OF THE  
DOWNTOWN WEST UTILIDOR  
SOUTH AUTUMN STREET

SAN JOSE

CALIFORNIA

PERMIT #  
PROJECT #

PROJECT  
INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER

NAME DATE

DEPARTMENT OF TRANSPORTATION

NAME DATE

MUNICIPAL WATER

NAME DATE

DEPARTMENT OF TRANSPORTATION - OPS

NAME DATE

STREETLIGHT LAYOUT

NAME DATE

ELECTRICAL CIRCUITS

NAME DATE

DEPARTMENT OF PUBLIC WORKS



APPROVED BY MATTHEW CANO  
DIRECTOR OF PUBLIC WORKS



SHEET 19 OF 20

1ST SUBMITTAL



CONTRACTOR AGREES THAT HE SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR ALL SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF PERSONS AND PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND EASEMENTS, AND FOR OBTAINING ALL NECESSARY INSURANCE AND BONDS. THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE OWNER AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE OWNER OR THE ENGINEER.

S:\PROJECTS\571900\DWG\COACHMENT PERMITS\CT DRAWINGS\571900\DWG PLAN PROFILE\UTILIDOR 04-CREEK.DWG, 9/3/2020, 12:39 PM

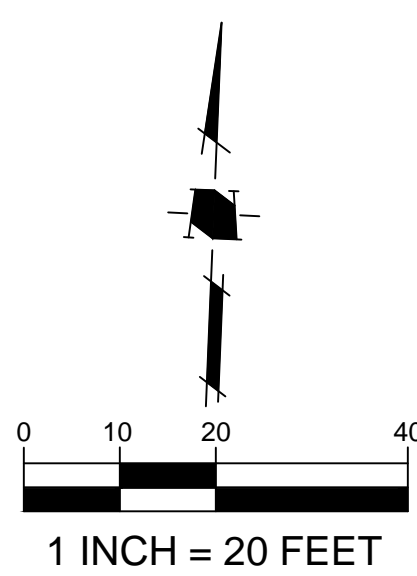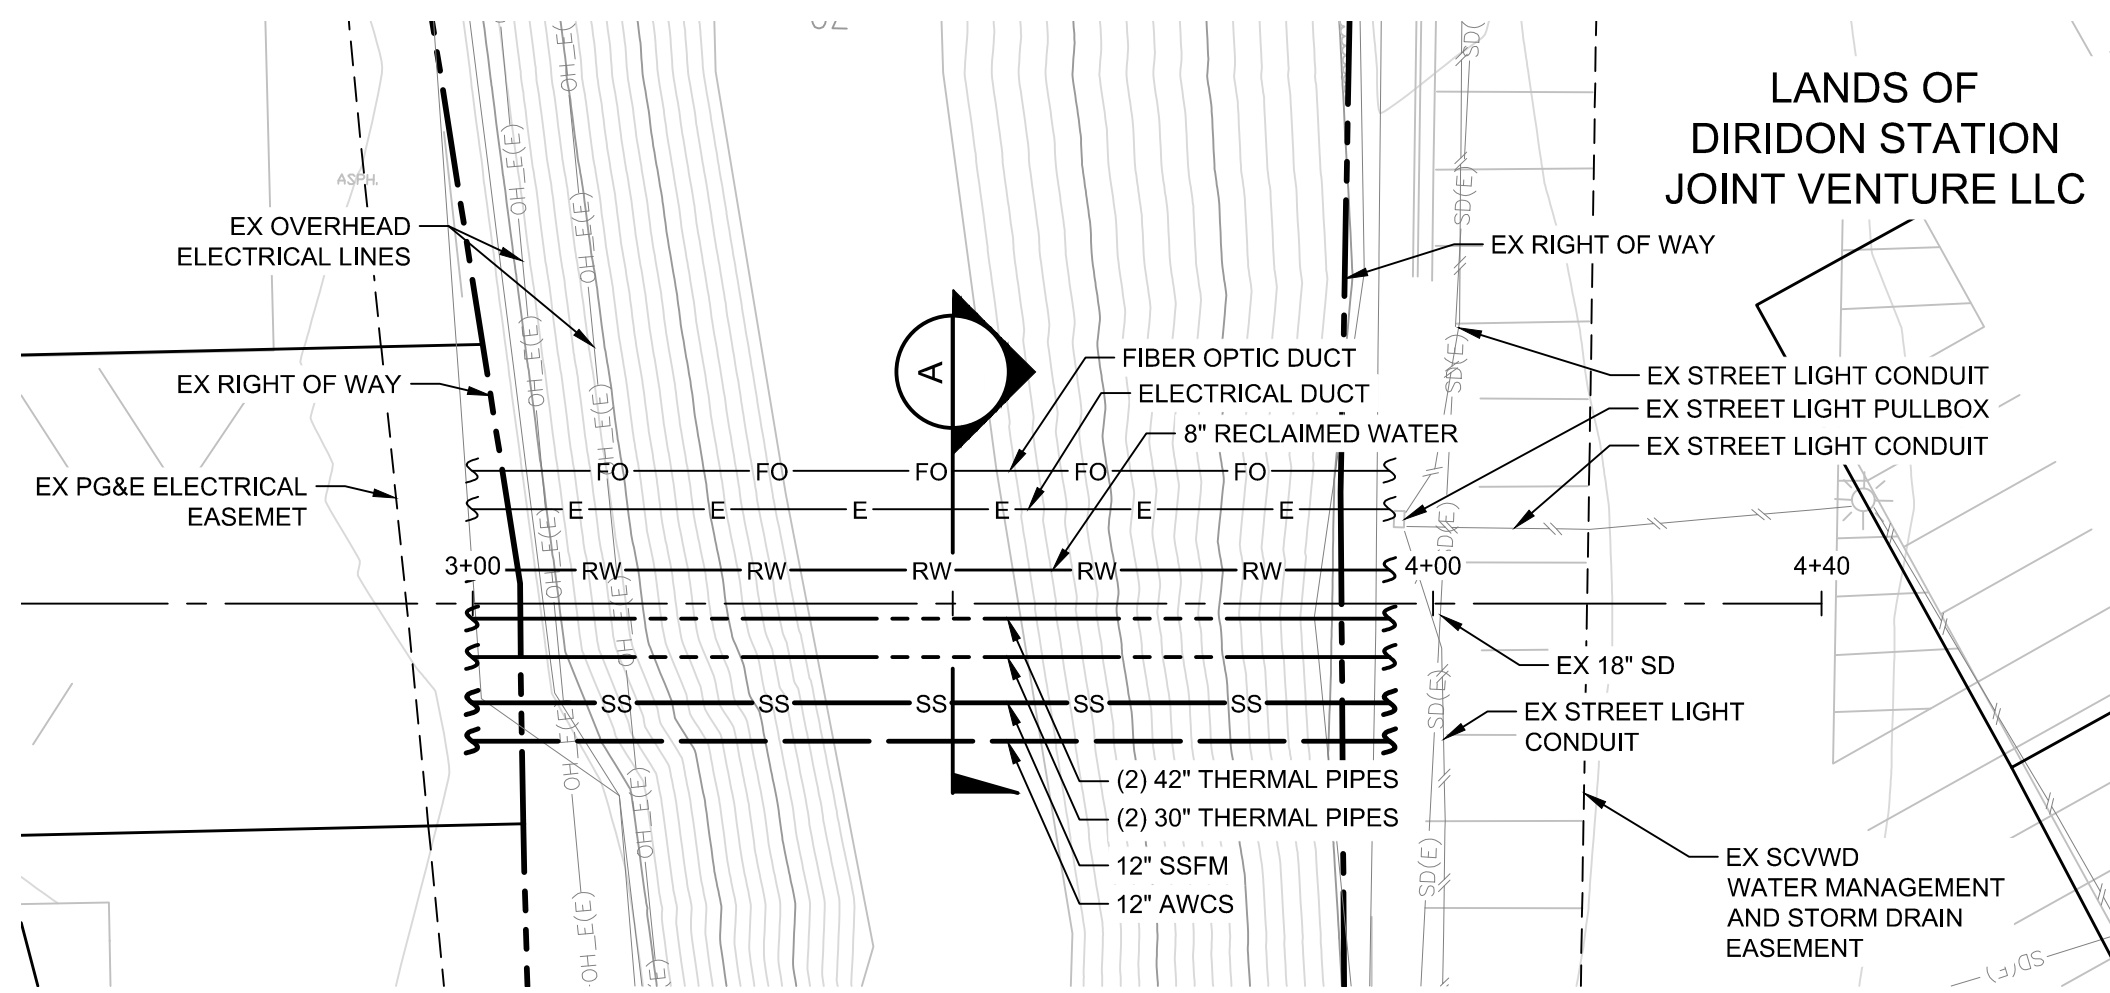



PLAN VIEW

LOS GATOS CREEK

NOTES

1. PLANS FOR THE INSTALLATION OF THE UNDERGROUND UTILIDOR VAULT. INDIVIDUAL UTILITIES INSTALLED WITHIN THE VAULT WILL BE DETERMINED AT TIME OF FINAL PROJECT IMPROVEMENT PLANS.

**CAUTION:**  
PG&E FACILITIES & HIGH PRESSURE GAS PIPELINES.  
CONTRACTOR TO VERIFY LOCATION PRIOR TO  
CONSTRUCTION OF ANY IMPROVEMENTS.

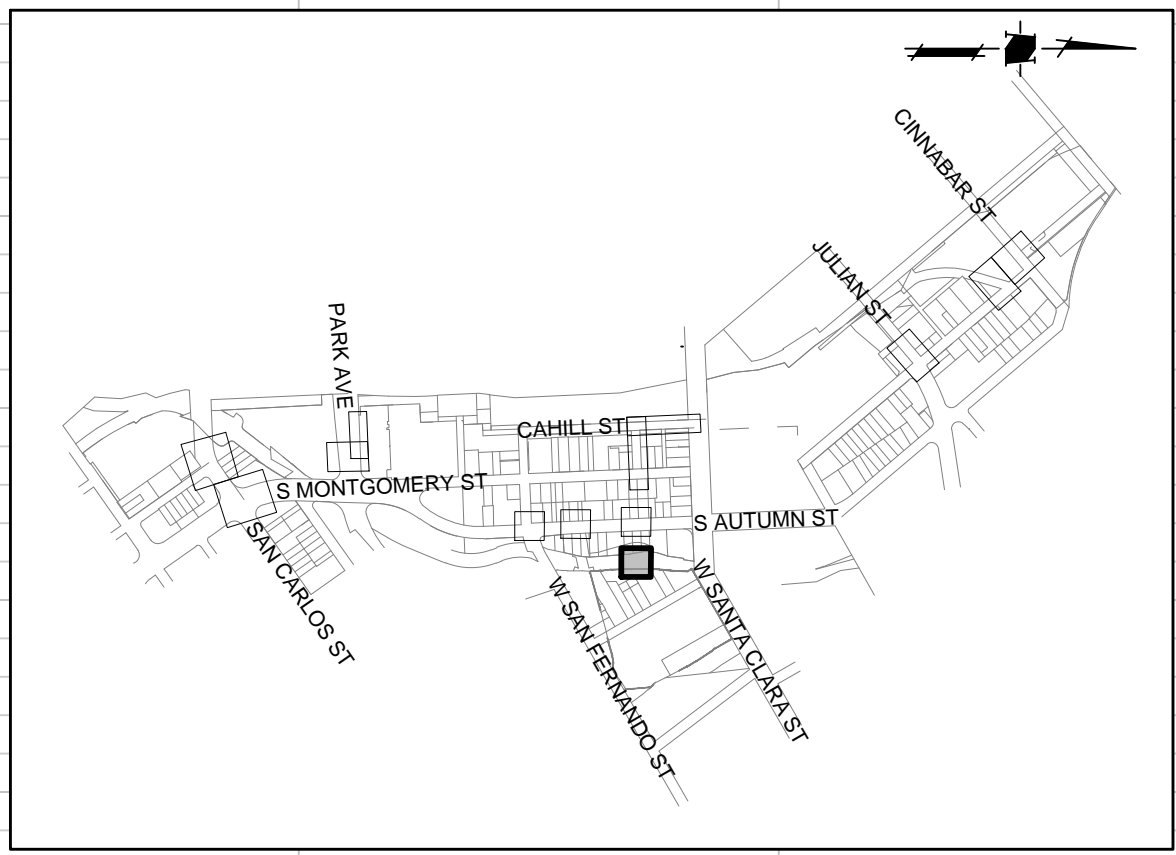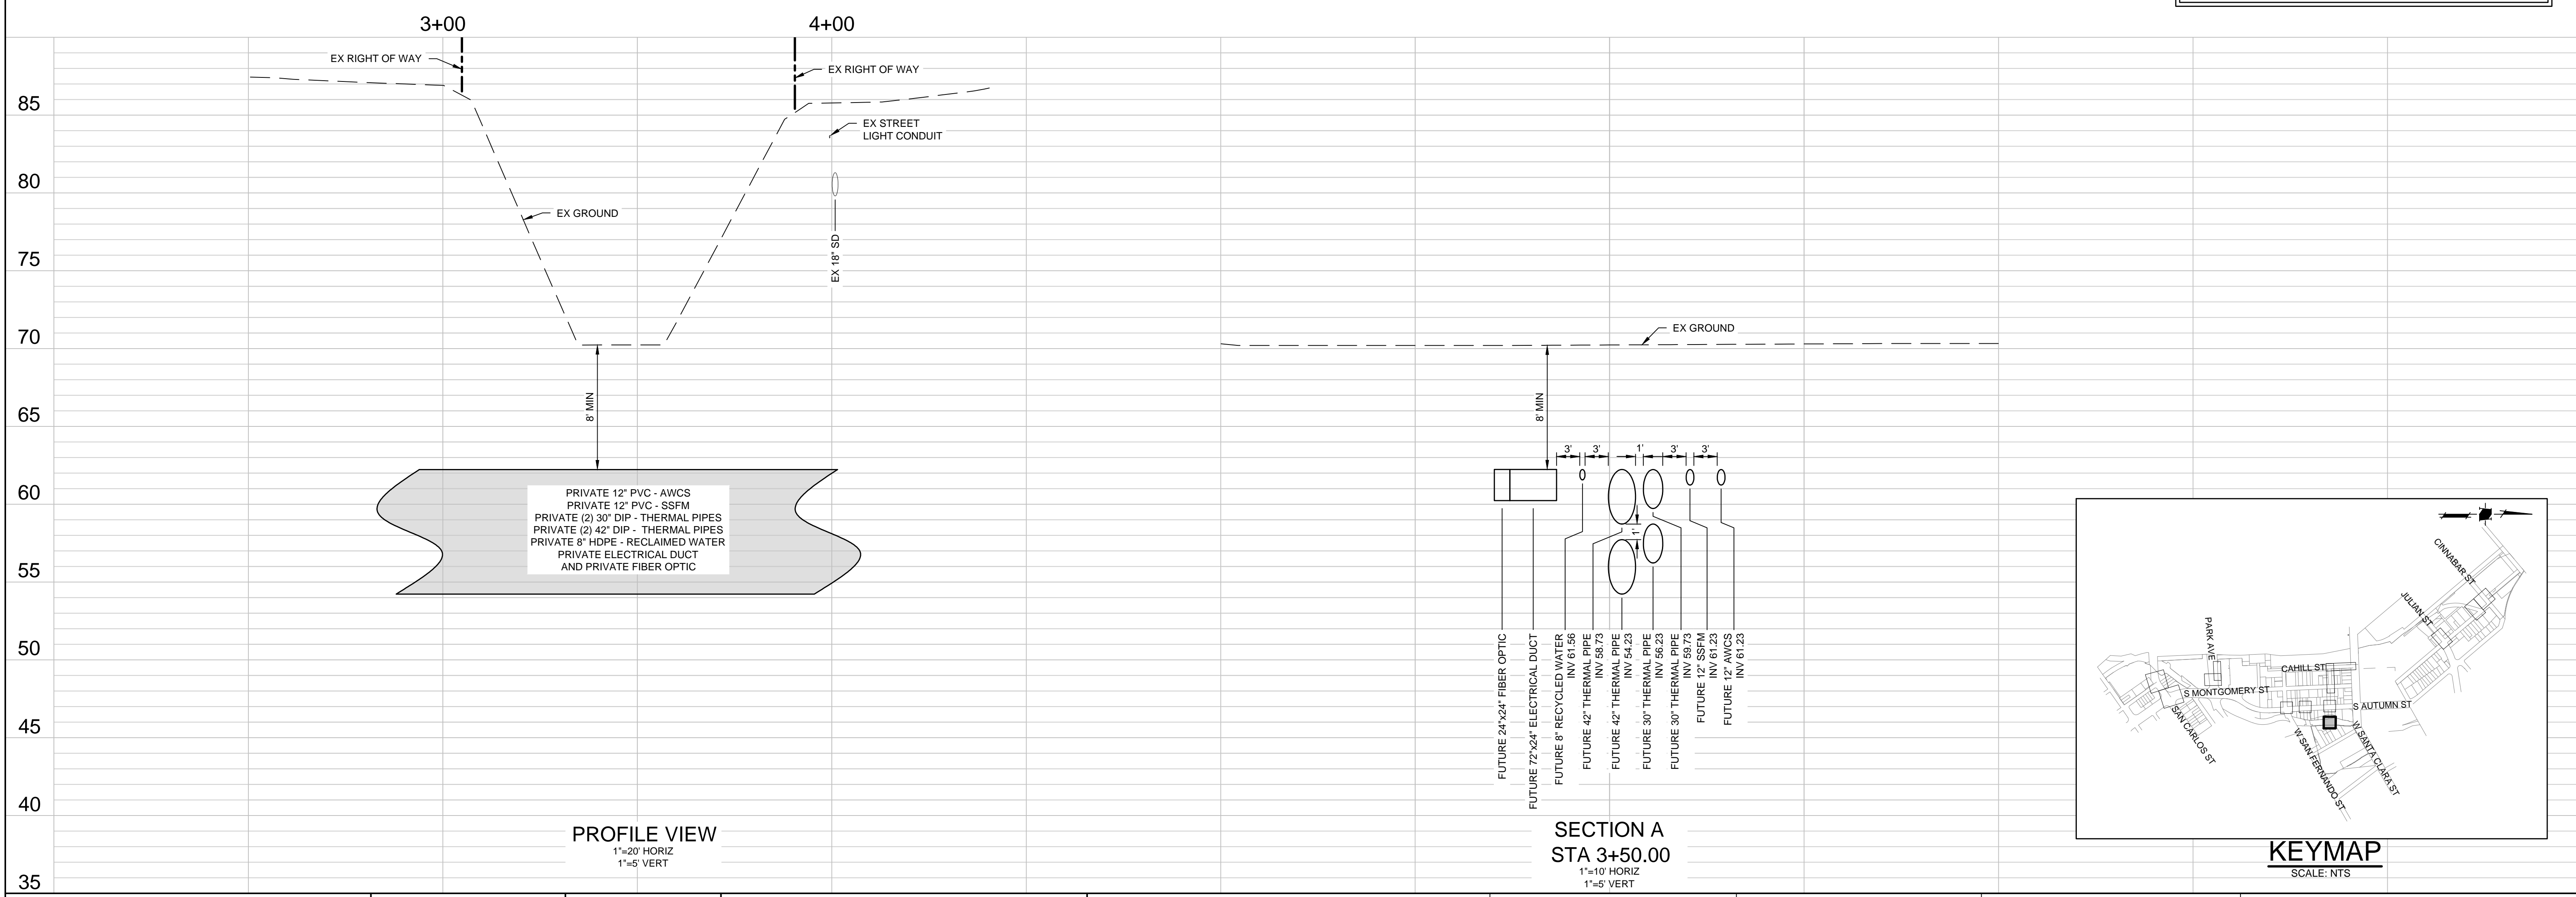

DATE:	SEPTEMBER 8, 2020
SCALE:	AS SHOWN
DESIGNED:	RH
DRAWN:	LA/RM/JBC
CHECKED:	RH
PROJ. ENGR:	RH
FILE:	571900IP.DWG



PRELIMINARY  
NOT FOR CONSTRUCTION

PLAN  
FOR THE IMPROVEMENT OF THE  
DOWNTOWN WEST UTILIDOR  
LOS GATOS CREEK CROSSING

SAN JOSE CALIFORNIA

PERMIT #  
PROJECT #

PROJECT INSPECTOR:  
VOICEMAIL:

PROJECT ENGINEER
NAME DATE
DEPARTMENT OF TRANSPORTATION
NAME DATE
MUNICIPAL WATER
NAME DATE

DEPARTMENT OF TRANSPORTATION - OPS
NAME DATE
STREETLIGHT LAYOUT
NAME DATE
ELECTRICAL CIRCUITS
NAME DATE

DEPARTMENT OF PUBLIC WORKS
CITY OF <b>SAN JOSE</b> CAPITAL OF SILICON VALLEY
APPROVED BY MATTHEW CANO DIRECTOR OF PUBLIC WORKS
SHEET 20 OF 20